


ELIA PL - Panel LED



ELIA PL is a LED lowbay for lighting offices, available in square or rectangular versions with a frame in white powder-coated die-cast aluminium and two types of PMMA shield, a high-efficiency micro-prism version with a UGR of less than 19 and an opal version with an UGR of 22. ELIA PL can be flush-mounted in false ceilings with standard panels, or alternatively, can be ceiling or suspension-mounted using the accessories provided separately. The family of products is available with a colour temperature of 3,000K (warm white) or 4,000K (neutral white), a colour rendering index of more than 80 or more than 90 and a separate electronic power supply supplied as part of a kit, in On/Off or DALI versions. ELIA PL is easy to install thanks to the reduced weight of the device and the connector for electrical wiring which enables connection to the remote power supply.

GENERAL INFORMATION

Context	Office
Luminaire	LED luminaire for diffuse light
Aplicație	Internă
Unique digital code (Datamatrix)	Currently not present
Culoare	Alb
Tip sursă de lumină	LED - Neînlocuibil
Puterea sistemului	33 W
LED Lifetime	L80B50 (Tq25°) = 50.000h
Greutate (Kg)	2.6
Garanție	5 ani
Temperatură de stocare	-20° +65°
Operating temperature	-20° +45°
MATERIALS	-
Body	Aluminiu
Ecran	PMMA
Optic	With high efficiency microprismatic cover

OPTIC AND ILLUMINATING FEATURES


Optică	Microprismatic
Unified Glare Rating	UGR<19
Lumină ieșire (lm)	4000
Efficiency (lm/W)	120
Culoare Temperatură	4000 K
Color Rendering Index	CRI 80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0
Standard	-
ELETRICAL AND LIGHTING FEATURES	-
Tensiune de alimentare	220-240 V
Frecvență nominală (Hz)	50 / 60
Driver	Included
Driver failure rate	F025 = 50.000h Tq 25°C
Overvoltage protection	Overvoltage protection 1kV
Control System	PORNIT OPRIT

Gasket	-
Locking Hook	-
External screw	-
Colour	Powder coating
STANDARDS AND APPROVALS	-
Clasificare	-
Dispozitiv cu temperatură la suprafață redusă	-
Certificare DIN 18032-3	-
IPEA	-
Clasă izolație	II
Clasă de protecție IP	IP20 - IP40
Cod IK	IK03
Glow Test conductori	-


INSTALLATION AND MAINTENANCE

Mouting and installation	Montaj încadrat modular
Tilt	With suspension adjustment Kit
Wiring	With connection terminal on driver
Prindere	-
Optic Maintenance	Not available
LED Maintenance	Not available
Driver Box	Independent driver unit
Suprafață maximă expusă la vânt	-

DIMENSIONAL

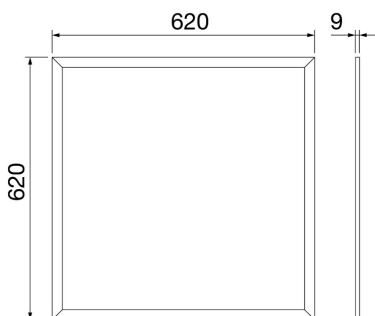

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IP20 - IP40

IK

IK03

GWT

-

STANDARDS/APPROVALS

Data, measures, designs and pictures are for information purpose only, last update 19/08/2021. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website www.gewiss.com. Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2



Product Data Sheet
GWF1610NN840

ELIA PL - Panel LED

