



SMART [PRO] 2.0 is a high power outdoor and indoor LED projector, suitable for lighting large areas and sports facilities.

It can be installed on the wall, ceiling or ground thanks to the polyester powder coated galvanised steel bracket with trivalent passivation, equipped with adjustable goniometric scale and supplied in a kit. The body is fabricated in aluminium die casting

EN AB 46100, with integrated passive heat sink, powder coated polyester with trivalent passivation. Metal core PCB with CSP LED.

Reflector made of metallic HT PC or anodised and polished aluminium. Hardened front glass with 4mm thickness, anti-ageing silicone seals and A2 stainless steel exterior screws. Plastic venting and anti-condensation device. Electrical connection via IP68 connector for 1.5mm² cables. Insulation class 1. Remote power

supply unit supplied separately. Available with nine different types of optics, three types of Colour Temperature (3,000/4,000K/5,700K) and three different types of Chromatic Yield Index (CRI>70, CRI>80, CRI>90).

Designed to withstand surges up to 5KV (RCCB mode) and 10KV (common mode), temperature variations from -30°C to +50°C, water and dust penetration up to IP66 degree of protection and impacts up to IK08 grade.

GENERAL INFORMATION

			OPTIC AND ILLUMINATING FEATURES	
Context	Sport, Big Areas	Optică	A1 - Asymmetrical Wide	
Luminaire	LED luminaire with mid and high lumen power	Unified Glare Rating	G*4 - ULOR = 0	
Aplicatie	Intern / Extern	Lumină ieșire (lm)	76200	
Unique digital code (Datamatrix)	Currently not present	Efficiency (lm/W)	115	
Culoare	Gri grafit	Culoare Temperatură	5700 K	
Tip sursă de lumină	LED - Neînlocuibil	Color Rendering Index	CRI>70	
Puterea sistemului	660 W	Standard Deviation Colour Matching	SDCM = 5	
LED Lifetime	L90B10(Tq25°C)=40.000h; L80B10(Tq25°C)=90.000h	Photobiological Risk Class	-	
Greutate (Kg)	15	Standard	EN60598-1; EN60598-2-5; IEC 62778; IEC 62471; EN13201	

Garantie

Temperatură de stocare	5 ani	ELETICAL AND LIGHTING FEATURES	-
Operating temperature	-	Tensiune de alimentare	-
	-30 +50 °C	Frecvență nominală (Hz)	-

MATERIALS

Body	Aluminiu turnat	Driver	To be ordered separately
Ecran	Flat tempered glass 4mm	Driver failure rate	See external supply unit
Optic	Polished quartz and metallized PC HT reflector	Overvoltage protection	See external supply unit

Gasket

Locking Hook	Anti-aging silicone	Control System	See external supply unit
	Hexagonal metric screws	Mouting and installation	High-mast lighting - Wall mounting - Ground mouting


External screw

	Stainless steel	Tilt	Rotation on bracket with integrated goniometer
Colour	Polyester powder coated	Wiring	Watertight connector


STANDARDS AND APPROVALS

Clasificare	-	Prindere	Consolă
Dispozitiv cu temperatură la suprafață redusă	Nu	Optic Maintenance	Not available
Certificare DIN 18032-3	-	LED Maintenance	Da
IPEA	-	Driver Box	Exterior
Clasă izolație	I	Suprafață maximă expusă la vânt	0,222 m ²
Clasă de protecție IP	IP66		-
Cod IK	IK08		-
Glow Test conductorii	-		-

DIMENSIONAL

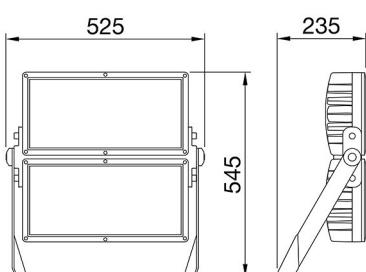

PHOTOMETRIC DISTRIBUTION

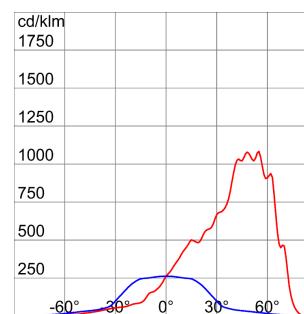

Smart [PRO] 2.0

TECHNICAL SYMBOLOGY

0,222 m²IP
IP66IK
IK08GWT
-

STANDARDS/APPROVALS

