



On request




Recessed modular fixture suitable for interior lighting in offices and environments for the tertiary. Provided with microprismatized PMMA screen, it is the ideal solution for workstations with high visual comfort. Can also be installed in ceiling and suspended by dedicated accessories kit.

Aplicație	Internă	Instalare	Doze sub tencuială
Dimensiuni (mm)	600 x 600	Cod IK	IK04
Tensiune	220/240 V - 50/60 Hz - Autonom	Puterea sistemului	26 W
Greutate (Kg)	3.1	Lampa tip	LED
Culoare	Alb	Lumină ieșire (lm)	2790
Clasă de protecție IP	IP20 - IP40	Clasă izolație	II
Tip driver	LED driver	Temperatură de operare	-25 +40 °C
UGR	<=19	Garanție	5 ani
Temperatură de culoare	4000 K (CRI>80)	Clasă de eficiență a LED-urilor integrate	A ÷ A++
Electrocod	2419	Durată utilizare LED (L70B30)	50000 h

### DIMENSIONAL

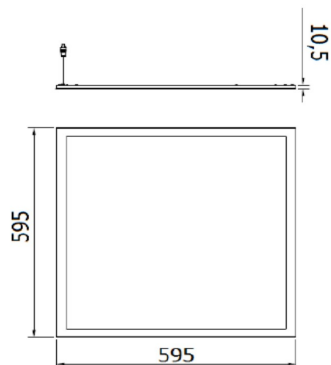

### PHOTOMETRIC DISTRIBUTION

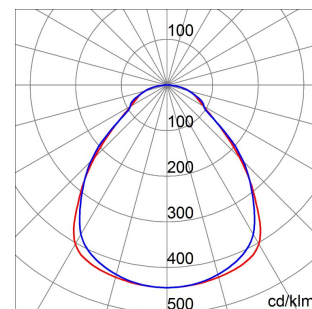

### TECHNICAL SYMBOLOGY



IK

IK04



IP

IP20 - IP40



### STANDARDS/APPROVALS

