



Smart [4] ATEX is the series of LED indoor lighting appliances ideal for use in areas where flammable gases, vapours and dust are present. Two different sizes available: 1M, 2M. The body is made of "Halogen-free" nylon loaded with grey glass fibre (RAL7035) with venting and anti-condensation device, aluminium alloy heat dissipation device EN AB 44300. It is equipped with a dual optical system that includes a metallic reflector with ARRAY optics and a metallic reflector with UV stabilized PMMA lenses, with high efficiency, which allow a wide variety of 60°, 90° and asymmetric light distributions. The electrical connection is via a 3x1.5 mm² H07RN-F cable with anti-condensation device exiting the product via a PG13.5 ATEX certified metal cable gland. The industrial reflector is certified ATEX II 3 G Ex nR IIC T6 Gc - II 3 D Ex tc IIIC T65°C Dc. Suspension, wall and projection appliances can be installed. It is available with three types of Colour Temperature (4000K / 5700K), Color Rendering Index CRI>80 and ON/OFF power supply.

GENERAL INFORMATION

Context	Logistics and industrial manufacturing lighting
Luminaire	LED Industrial Reflector
Aplicație	Internă
Unique digital code (Datamatrix)	Datamatrix
Culoare	Gri RAL 7035
Tip sursă de lumină	LED - Neînlocuibil
Puterea sistemului	127 W
LED Lifetime	L90B10(Tq25°C)>150.000h; L90B10(Tq40°C)=140.000h
Greutate (Kg)	6

Garanție	5 ani
Temperatură de stocare	-40 +70 °C
Operating temperature	+5°C ÷ +40 °C

MATERIALS

Body	PA6 "Halogen Free" loaded fibreglass
Ecran	Tempered glass Thickness 4mm
Optic	Metallic PC reflector and PMMA lenses
Gasket	anti-aging silicone
Locking Hook	-
External screw	Oțel
Colour	Gri RAL 7035

STANDARDS AND APPROVALS

Clasificare	ATEX: II 3 G Ex nR IIC T6 Gc - II 3 D Ex tc IIIC T65°C Dc
Dispozitiv cu temperatură la suprafață redusă	Da
Certificare DIN 18032-3	-
IPEA	-
Clasă izolație	I
Clasă de protecție IP	IP66
Cod IK	IK08
Glow Test conductori	850 °C

OPTIC AND ILLUMINATING FEATURES

Optică	90°
Unified Glare Rating	UGR ≤ 25
Lumină ieșire (lm)	17800
Efficiency (lm/W)	140
Culoare Temperatură	4000 K
Color Rendering Index	CRI>80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0

Standard	EN 60079-0 ; EN 60079-15 ; EN 60079-31 ; EN 60598-1 ; EN 60598-2-1
----------	---

ELETRICAL AND LIGHTING FEATURES

Tensiune de alimentare	220 - 240 V
Frecvență nominală (Hz)	50/60 Hz
Driver	Included
Driver failure rate	F10=100.000h Tq25°C/50.000h Tq40°C
Overvoltage protection	DM 6 kV / CM 10 kV
Control System	ON / OFF

INSTALLATION AND MAINTENANCE


Mouting and installation	Ceiling - Wallmounting - Suspension
Tilt	With bracket accessory
Wiring	Single wiring with anti-breathing cable exiting metallic PG (NO Connector)

Prindere	-
Optic Maintenance	Non-replaceable


LED Maintenance	Non-replaceable
Driver Box	Integrat
Suprafață maximă expusă la vânt	0,184 m²

-	-
-	-
-	-
-	-

DIMENSIONAL

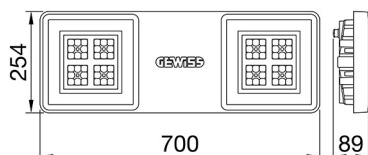

PHOTOMETRIC DISTRIBUTION

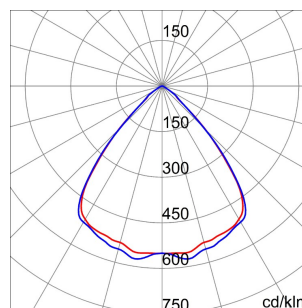

SMART[4] Special versions

TECHNICAL SYMBOLOGY



0,184 m²



IP
IP66

IK
IK08

GWT
850 °C

STANDARDS/APPROVALS

