


## Arteor™ USB Type-C charger

Cat. No(s): 5 700 79 - 5 710 79 - 5 724 84 - 5 733 94




### 1. USE

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.

### 2. RANGE

Description	White	Magnesium	Soft alu	Champagne
1 USB Type-C 5.0V ~ - 1.5 A	5 724 84	5 733 94	5 700 79	5 710 79

### 3. DIMENSIONS (mm)

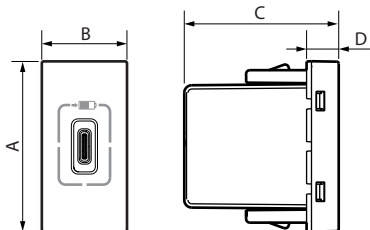

A	B	C	D
45	22.5	41	8.5

### 4. CONNECTION

Circuit breaker: 16 A max.



Type of terminals: with screws  
Terminal capacity: 1 x 2.5 mm<sup>2</sup>  
Stripping length: 6 mm  
Screwdriver: flat 3.5 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies/liquid: IP 40

### 5. TECHNICAL CHARACTERISTICS (continued)

#### ■ 5.2 Material characteristics

Base: PC V-0 class

Cover-plate: PC White RAL 9003

PC painted Magnesium varnished glittery, Soft alu, Champagne

Self-extinguishing:

850° C/30 s for insulating parts holding live parts in place.

650° C/30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal output voltage	5.0 V~
Nominal input current	0.25 A
Nominal output current	1.5 A
Output power	7.5 W
Average efficiency in active mode	78.7 %
Stand-by power consumption	0.075 W
Protection class	II - Low voltage

No-load power consumption class and average efficiency level: Level VI\*

\*Nota: European Regulation No. 278/2009 of 6 April 2009, Directive 2009/125/EC on eco-design requirements for AC/DC power supplies.

**Note:** To optimize the charging time of your device, ensure turn it off during the charging phase.

#### ■ 5.4 Climatic characteristics

Storage temperature: - 20°C to + 70°C

Usage temperature: + 5°C to + 45°C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichlorethylene.

**Caution:** Always test before using other special cleaning products.

### 7. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.

Refer to e-catalogue.