



## Arteor™ Single pole switches


Cat. no(s): 5 700 09/10 - 5 710 09/10 - 5 720 09/10/41 - 5 723 80/81  
5 725 09/10/41 - 5 730 20/21/22/23/24/25/70  
5 731 20/21/22/23/24/25/39/40/41/42/43/44/45/70



5 700 09 - 5 710 09 - 5 720 09 - 5 725 09



5 720 41 - 5 723 80/81 - 5 725 41













5 730 70 - 5 731 42/70

### 1. USE


Général lighting mechanisms.

### 2. RANGE


	Designation	Finishes				No. of modules	Connection method	Characteristics
		White	Magnesium	Soft alu	Champagne			
	Single pole switch one way (square)	5 720 09	5 725 09	5 710 09	5 700 09	1	with screws	20 AX - 250 VAC
	Single pole switch one way (round left)	5 730 20	5 731 20	5 731 39	-	1	with screws	20 AX - 250 VAC
	Single pole switch one way (round middle)	5 730 21	5 731 21	5 731 40	-	1	with screws	20 AX - 250 VAC
	Single pole switch one way (round right)	5 730 22	5 731 22	5 731 41	-	1	with screws	20 AX - 250 VAC
	Single pole switch one way (square)	5 720 41	5 725 41	5 723 80	5 723 81	2	with screws	20 AX - 250 VAC
	Single pole switch one way (round)	5 730 70	5 731 70	5 731 42	-	2	with screws	20 AX - 250 VAC
	Single pole switch two way (square)	5 720 10	5 725 10	5 710 10	5 700 10	1	with screws	20 AX - 250 VAC
	Single pole switch two way (round left)	5 730 23	5 731 23	5 731 43	-	1	with screws	20 AX - 250 VAC
	Single pole switch two way (middle)	5 730 24	5 731 24	5 731 44	-	1	with screws	20 AX - 250 VAC
	Single pole switch two way (round right)	5 730 25	5 731 25	5 731 45	-	1	with screws	20 AX - 250 VAC

### 3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted

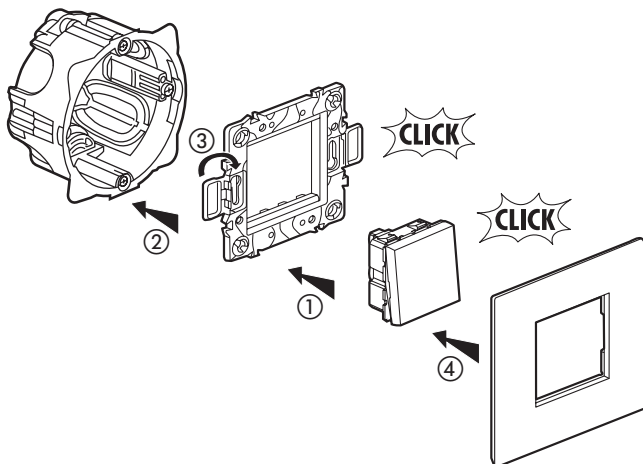


### 4. OVERALL DIMENSIONS

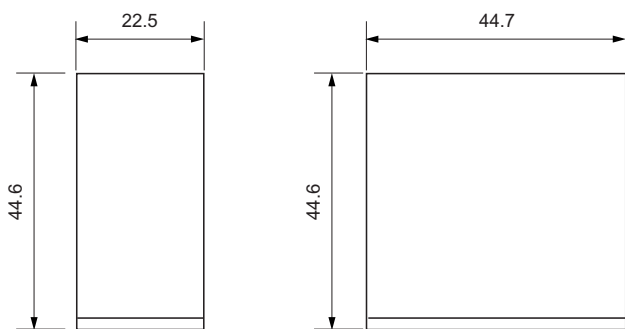

5 700 09/10 - 5 710 09/10 - 5 720 09/10  
5 725 09/10 - 5 730 20/21/22/23/24/25  
5 731 20/21/22/23/24/25/39  
5 731 40/41/43/44/45

5 720 41 - 5 723 80/81  
5 725 41  
5 730 70 - 5 731 42/70



### 5. CONNECTION

Terminals: with screws  
Capacity: 4 x 2.5 mm<sup>2</sup> or 2 x 4 mm<sup>2</sup> or 1 x 6 mm<sup>2</sup>  
Stripping: 10 mm  
Screwdriver: 4 mm flat-blade up to 5.5 mm

### 6. OPERATION

Switching mechanism.

### 7. TECHNICAL CHARACTERISTICS

#### ■ 7.1 Mechanical characteristics

Impact tests: IK 04  
Protection by solid bodies / liquids: IP 40 (mounted)  
IP 20 (alone)

#### ■ 7.2 Material characteristics

Rocker: Polycarbonate  
Base: Polycarbonate  
Basket: Polypropylene

#### ■ 7.3 Electrical characteristics

Voltage: 250 VAC  
Current: 20 AX  
Self-extinguishing: 650° C / 30 s

#### ■ 7.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
Operating temperatures: - 5° C to + 50° C

### 7. TECHNICAL CHARACTERISTICS

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene

Resistance to the following cleaning agents: Hexane (EN-60669-1),  
Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%,  
Glass cleaning substance, Pre-impregnated wipes.

**Caution:** Always test before using other special cleaning products.

### 8. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.  
Refer to e-catalogue.