



Arteor™ 6 A push-buttons


Cat. no(s): 5 700 00 - 5 710 00 - 5 720 00/01/30/31 - 5 725 00/01/30/31
5 730 00/01/02/34/35/42/43/44/45/50/51/54/55/56/57/59
5 731 00/01/02/50/51



5 700 00 - 5 710 00 - 5 720 00 - 5 725 00



5 720 30/31 - 5 725 30/31 - 5 730 34/35/44/45












5 730 50/51/57/59 - 5 731 50/51

1. USE

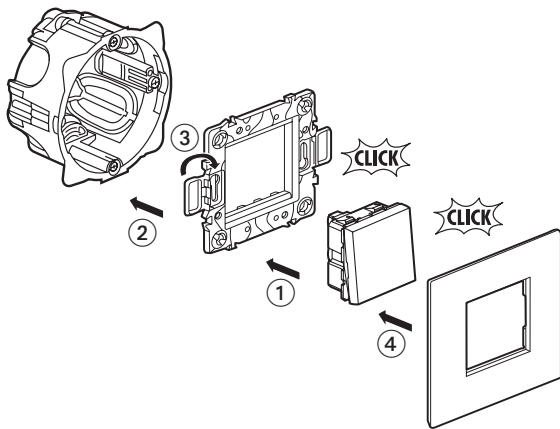
General lighting control mechanisms.

2. RANGE

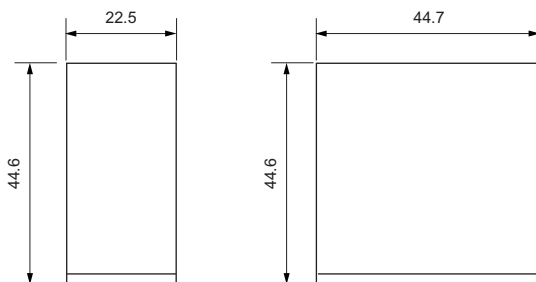
	Designation	Finishes				No. of modules	Connection method	Characteristics
		White	Magnesium	Soft Alu	Champagne			
	One-way push-button (square)	5 720 00	5 725 00	5 710 00	5 700 00	1	with screws	6 A - 250 VAC
	Two-way push-button (square)	5 720 01	5 725 01	5 730 42	5 730 43	1	with screws	6 A - 250 VAC
	One-way push-button (square)	5 720 30	5 725 30	5 730 34	5 730 35	2	with screws	6 A - 250 VAC
	Two-way push-button (square)	5 720 31	5 725 31	5 730 44	5 730 45	2	with screws	6 A - 250 VAC
	One-way push-button (round left)	5 730 00	5 731 00	5 730 54	-	1	with screws	6 A - 250 VAC
	One-way push-button (middle)	5 730 01	5 731 01	5 730 55	-	1	with screws	6 A - 250 VAC
	One-way push-button (round right)	5 730 02	5 731 02	5 730 56	-	1	with screws	6 A - 250 VAC
	One-way push-button (round)	5 730 50	5 731 50	5 730 57	-	2	with screws	6 A - 250 VAC
	Two-way push-button (round)	5 730 51	5 731 51	5 730 59	-	2	with screws	6 A - 250 VAC

3. PREPARATION

Terminals: with screws




4. OVERALL DIMENSIONS



5 700 00 - 5 710 00 - 5 720 00/01
5 725 00/01
5 730 00/01/02/42/43/54/55/56
5 731 00/01/02

5 720 30/31 - 5 725 30/31
5 730 34/35/44/45/50/51/57/59
5 731 50/51



5. Connection

Terminals: with screws
Capacity: 2 x 2.5 mm² or 1 x 4 mm²
Stripping: 10 mm
Screwdriver: 4 mm flat-blade up to 5.5 mm

6. OPERATION

Push button mechanism.

7. TECHNICAL CHARACTERISTICS

■ 7.1 Mechanical characteristics

Impact tests: IK 04
Protection by solid bodies/liquids: IP 40 (mounted)
IP 20 (alone)

■ 7.2 Material characteristics

Rocker: Polycarbonate
Base: Polycarbonate
Basket: Polypropylene

■ 7.3 Electrical characteristics

Voltage: 250 VAC
Current: 6 A
Self-extinguishing: 650° C / 30 s

■ 7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning agents: Hexane (EN 60669-1),
Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach
10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

9. CONFORMITY AND APPROVALS

Compliance with installation and manufacturing standards.
Refer to e-catalogue.