



## Belanko™ Blanking plates


Cat. No(s): 6 171 28/29/32 - 6 72 28 - 6 173 28/29/32 - 6 174 28/29



6 171 28



6 171 29



6 171 32


### 1. USE

Blanking plates, to be equipped with support frames and plates.

### 2. RANGE

	White	Ivory	Dark Grey	Brown
1 gang blanking plate	6 171 28	6 172 28	6 173 28	6 174 28
2 gang blanking plate	6 171 29	-	6 173 29	6 174 29
Arteor adaptor - 1 gang	6 171 32	-	6 173 32	-

### 3. OVERALL DIMENSIONS (mm)

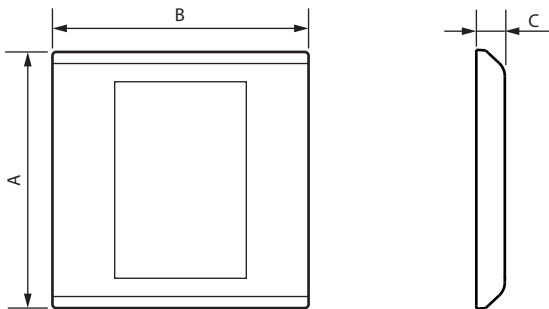

Cat. Nos	A	B	C
6 171 28 - 6 172 28 - 6 173 28 - 6 174 28	86	86	10
6 171 29 - 6 173 29 - 6 174 29	86	146	10
6 171 32 - 6 173 32	86	86	10

### 4. TECHNICAL CHARACTERISTICS

#### ■ 4.1 Material characteristics

Thermoplastic with glossy finish (White)

Colour: White T084: PC

Dark Grey and Brown: PC painted

Halogen free

UV resistant

Self-extinguishing: 650° C / 30 s

#### ■ 4.2 Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 50° C

### 5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product, Pre-impregnated wipes.

**Caution:** An initial test is required for the use of other special maintenance products.

### 6. STANDARDS AND APPROVALS

Conform to BS 5733