



Synergy™

Blanking plate - Sleek design

Cat. No(s): 8 320 95/96 - 8 322 95/96 - 8 324 95/96



8 32x 95

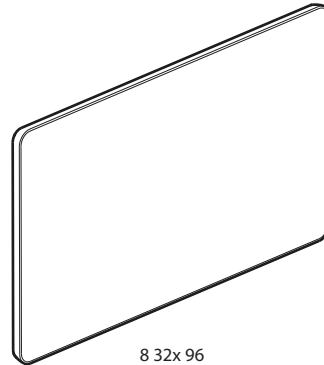

8 32x 96

1. USE

Blanking plates.
 Flush-mounting or surface-mounting.
 Fixing with screws.

2. RANGE


One-gang blanking plates

8 320 95	● Brushed stainless steel
8 322 95	● Polished stainless steel
8 324 95	● Glossy gold

Two-gang blanking plates

8 320 96	● Brushed stainless steel
8 322 96	● Polished stainless steel
8 324 96	● Glossy gold

3. OVERALL DIMENSIONS (mm)

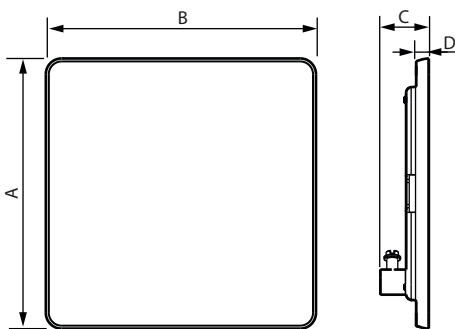

Cat. Nos	A	B	C	D
8 32x 95	86	86	15,5	4
8 32x 96	86	146	15	4

4. TECHNICAL CHARACTERISTICS

■ 4.1 Mechanical characteristics

Impact tests: IK 01
 Penetration by solid bodies/liquids: IP 20

■ 4.2 Material characteristics

- BSS: austenitic Brushed Stainless Steel - non magnetic - grade 304 L
 - PSS: Polished Stainless Steel + rust resistance
 - GG: Stainless Steel + rust resistance
 Halogen free
 UV resistant

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

■ 4.3 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

5. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.