






Arteor™ 13A BS Sockets with USB

Cat. No(s): 5 700 82/5 710 82/5 721 58/5 726 58/5 721 56/5 726 56/5 721 42/5 726 42
5 710 08/5 700 80/5 710 81/5 700 81
5 721 27/5 726 27/5 722 28/5 721 29/5 726 29
5 722 28/29/49/58



5 700 82/5 710 82
5 721 58/5 726 58
TypeA

5 721 56/5 726 56
5 710 08/5 700 80
TypeA

5 721 42/5 726 42
5 710 81/5 700 81
TypeA+C

5 721 27/5 726 27
5 722 28/58
TypeC

5 721 29/5 726 29
5 722 29/49
TypeC


1. USE

Sockets with USB chargers for recharging portables devices such as smartphones, tablets, Mp3 or MP4 players, loudspeakers, watches, game consoles, powerbanks, etc. Mechanism supplied with rocker plate, to be equipped with special plate. Support frame not needed
Shuttered for child safety.

2. RANGE

Designation	White	Magnesium	Champagne	Alu
2P+E 1 gang unswitched + 1 USB Type-A (1 output Type-A)	5 721 58	5 726 58	5 710 82	5 700 82
2P+E 1 gang switched + 1 USB Type-A (1 output Type-A)	5 721 56	5 726 56	5 710 80	5 700 80
2 x 2P+E 2 gang switched + 1 USB Type-A + 1 USB Type-C (1 output Type-A - 1 output Type-C)	5 721 42	5 726 42	5 710 81	5 700 81
2P+E 1 gang unswitched + 1 USB Type-C (1 output Type-C)	5 721 27	5 726 27	5 722 28	5 722 58
2P+E 1 gang switched + 1 USB Type-C (1 output Type-C)	5 721 29	5 726 29	5 722 29	5 722 49

3. DIMENSIONS (mm)

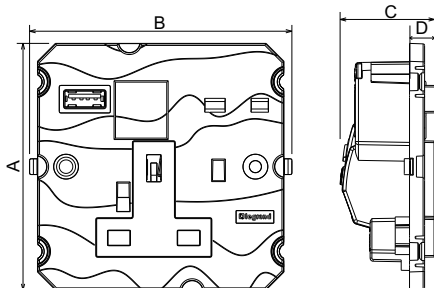

References	A	B	C	D
5 710 82/5 700 82/5 721 58/5 726 58	78.5	83.5	30.2	8
5 710 08/5 700 80/5 721 56/5 726 56	78.5	83.5	33.3	11.3
5 710 81/5 700 81/5 721 42/5 726 42	83.5	143.2	30.5	11.3
5 721 27/5 726 27/5 722 28/5 722 58	78.5	83.5	30.2	8
5 721 29/5 726 29/5 722 29/5 722 49	78.5	83.5	34.7	11.3

4. CONNECTION

Terminal types: with screw
Terminal capacity: 4 X 2.5 mm²
3 X 4 mm²
2 X 6 mm²
Recommended stripping length: 12 mm
Recommended terminal tightening torque: 0.5Nm

5. TECHNICAL CHARACTERISTICS

5.1 Material characteristics

Base: PP
Cover-plate: PC
Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials

5.2 Electrical characteristics

13A Socket:
Voltage: 250V~ Current: 13A
Frequency: 50/60Hz

ArteorTM

13A BS Sockets with USB

Cat. No(s): 5 700 82/5 710 82/5 721 58/5 726 58/5 721 56/5 726 56/5 721 42/5 726 42
5 710 08/5 700 80/5 710 81/5 700 81
5 721 27/5 726 27/5 722 28/5 721 29/5 726 29
5 722 28/29/49/58

USB Chargers:

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Type	1 USB (Type A)	1 USB (Type C)	2 USB (Type A+C)
Nominal input voltage	220-240V~	100-240V~	220-240V~
Nominal input frequency	50-60 Hz		
Power consumption	12 W	15 W	15 W
Maximum input current	300 mA	500 mA	300 mA
Maximum power consumption in standby	0.075 W		
Power average efficiency	79.94%	81.39%	81.39%
Nominal output voltage	5V---		
Maximum output current	2.4 A	3.0 A	3.0 A*

No-load consumption and average energy efficiency: Level VI**

Protection class	II - Low voltage
------------------	------------------

* Note : shared on A and C output

** Note : European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies.

Note : To optimize the charging time of your device, ensure to turn it off during the charging phase.

5.3 Climatic characteristics

Storage temperatures: -20°C to +70°C

Operating temperatures: -5°C to +35°C

5.4 Mechanical characteristics

Impact test: IK04

Protection against solids & liquids: IP20

6. CLEANING

Surface cleaning with a soft, slightly damp cloth.

Do not use: acetone, tar remover, trichloroethylene

7. CONFORMITY - APPROVALS

Conform with installation and manufacturing standards.

Refer to e-catalogue.