



Arteor™ Control for hotel equipment


Cat. No(s): 5 700 52/54 - 5 710 52/54 - 5 722 01/02/19/20
 5 727 01/02/19/20/54/55 - 5 729 42/43
 5 732 20/22/23/24/25/34/35/36/37
 5 737 22/23/24/25/34/35/36/37/75/76



5 722 01 - 5 727 01 - 5 727 54/55



5 732 22 - 5 737 22/75/76



5 732 37 - 5 737 37

1. USE

Control (up, down, stop) for awnings, roller shutters, etc.
 Double two-way switch for direct control of a motor (mechanism with fixed positions).
 The mechanisms can be flush-mounted or surface-mounted.


2. RANGE

	Description	White	Magnesium	Soft Alu	Champagne
	Curtain push Center retract Square - 1 module	5 722 01	5 727 01	5 727 54	5 727 55
	Curtain switch Center OFF Square - 1 module	5 722 02	5 727 02	5 710 52	5 700 52
	Double push for electric shutter Square - 2 modules	5 722 19	5 727 19	5 729 42	5 729 43
	Double switch for electric shutter Square - 2 modules	5 722 20	5 727 20	5 710 54	5 700 54
	Double switch for electric shutter Round - 2 modules	5 732 20	-	-	-
	Double switch Roller blinds marking Square - 2 modules	5 732 22	5 737 22	5 737 75	5 737 76
	Double switch Roller blinds marking Round - 2 modules	5 732 23	5 737 23	-	-
	Double push Roller blinds marking Square - 2 modules	5 732 24	5 737 24	-	-
	Double push Roller blinds marking Round - 2 modules	5 732 25	5 737 25	-	-

2. RANGE (continued)

	Description	White	Magnesium	Soft Alu	Champagne
	Double switch Curtain marking Square - 2 modules	5 732 34	5 737 34	-	-
	Double switch Curtain marking Round - 2 modules	5 732 35	5 737 35	-	-
	Double push Curtain marking Square - 2 modules	5 732 36	5 737 36	-	-
	Double push Curtain marking Round - 2 modules	5 732 37	5 737 37	-	-

3. OVERALL DIMENSIONS (mm)

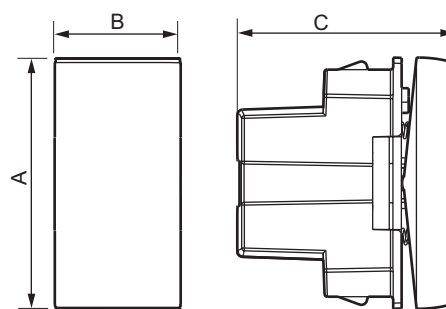


	A	B	C
1 module	45	22.5	39
2 modules	45	45	42

4. CONNECTION


Number of terminals: 3
 Type of terminals: with screws
 Terminal capacity: 2 x 1.5 mm² or 1 x 1.4 mm²
 Stripping length:
 - 8 mm for 5 722 01/02 - 5 727 01/02/54/55
 - 10 mm for 5 722 19/20 - 5 727 19/20 - 5 729 42/43
 5 732 20/22/23/24/25/34/35/36/37
 5 737 22/23/24/25/34/35/36/37/75/76
 Type of screwdriver: flat-blade screwdriver 4 mm up to 5.5 mm

■ 4.1 Control of an electronic control box



For: 5 722 01/19 - 5 732 24/25/36/37
 5 727 01/19/54/55 - 5 729 42/43 - 5 737 24/25/36/37

■ 4.2 Direct control of a motor

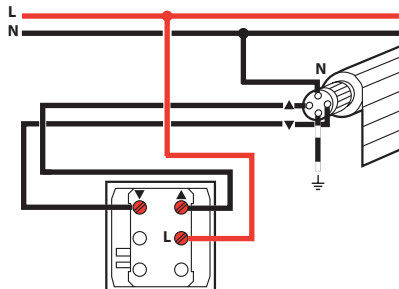

For: 5 722 02/20 - 5 732 20/22/23/34/35
 5 727 02/20 - 5 737 20/22/23/34/35/75/76

5. OPERATION

Used for direct and individual control of a roller shutter motor.
 Fitted with two switches linked by a system preventing simultaneous pressing of both switches STOP control is obtained by opening both switches.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40 (mounted)
 IP 20 (alone)

Impact test: IK 04

■ 6.2 Material characteristics

Rocker: Polycarbonate
 Base: Polycarbonate
 Self-extinguishing:
 850°C/30 s for insulating parts holding live parts in place.
 650°C/30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

Voltage: 250 Vac
 Current: 10 A
 6 A for Cat. No(s) 5 722 01 - 5 727 01/54/55

■ 6.4 Climate characteristics

Storage and operating temperatures: - 20°C to + 40°C

7. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN-60669-1), Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

8. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
 Refer to e-catalogue.