



Belanko™ EURO-US & US socket outlets


Cat. No(s): 6 170 60/61/62/63/64/65 - 6 173 61/62/64 - 6 174 61/62/64



6 17x 60



6 17x 61



6 17x 64


1. USE

One gang unswitched socket outlets.
 Complete delivered.
 For flush-mounting or surface mounting box.
 35 mm recommended depth back box
 Supplied with 2 screws M3.5 for BS boxes.

2. GAMME

Euro/US socket outlets	White	Dark Grey	Brown
1 gang 2 P socket	6 170 60	-	-
1 gang 2 P unswitched socket + 1 way switch single pole	6 170 61	6 173 61	6 174 61
1 gang 2 x 2 P socket	6 170 62	6 173 62	6 174 62
1 gang 2 P+E socket	6 170 63	-	-
1 gang 2 x 2 P+E socket	6 170 64	6 173 64	6 174 64
US socket outlet	White		
1 gang 2 P+E socket	6 170 65	-	-

3. DIMENSIONS (mm)

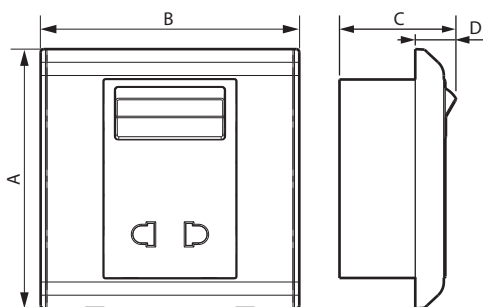

References	A	B	C	D
6 170 60 - 6 170 62 - 6 173 62 - 6 174 62	86	86	35	10
6 170 61 - 6 173 61 - 6 174 61	86	86	39	14
6 170 63 - 6 170 64 - 6 170 65 - 6 173 64 - 6 174 64	86	86	36	10

Distance of installation hole: 60,3 mm

4. CONNECTION

Type of terminals: with screws
 Terminal capacity sockets: 4 x 1.5 mm² - 2 x 2.5 mm² - 2 x 4 mm²
 Terminal capacity switch: 4 x 1 mm² - 4 x 1.5 mm² - 2 x 2.5 mm² - 1 x 4 mm²
 Stripping length: 8 mm
 Screwdriver: 4 m flat blade
 Compatible with flexible or rigid cables

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquids: IP 40

■ 5.2 Material characteristics

Thermoplastic with glossy finish (White, Ivory)
 Rocker: PC
 Frame: PC
 Base: PP
 Colour: White T084: PC
 Dark Grey: PC painted - Brown: PC painted

Halogen free
 UV resistant

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Cat. No(s)	Current	Voltage
6 170 60	15 A 16 A	127 V~ 250 V~
6 170 61 - 6 173 61 - 6 174 61	15 A 16 A 10 AX	127 V~ 250 V~ 250 V~
6 170 62 - 6 173 62 - 6 174 62	15 A 16 A	127 V~ 250 V~
6 070 64 - 6 173 64 - 6 174 64	15 A 16 A	127 V~ 250 V~
6 170 63	15 A 16 A	127 V~ 250 V~
6 170 65	15 A	127 V~

Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 50° C

6. CLEANING

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:
Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,
Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special
maintenance products.

7. STANDARDS AND APPROVALS

6 170 65 US: Conform to SASO 2204