



Synergy™
Front plates for Arteur mechanisms
Authentic

Cat. No(s): 8 331 88/90 - 8 333 88/90 - 8 335 88/90



8 33x 88

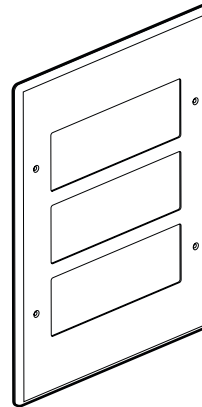

8 33x 90

1. USE

Front plates for Arteur mechanisms.
 Flush-mounting or surface-mounting.
 Fixing with screws.
 Use with grid yokes:
 for 8 33x 88: 2 x 7 354 74 and for 8 33x 90: 3 x 7 354 76

2. RANGE


2 x 2 gang for 8 Arteur modules

8 331 88	● Brushed stainless steel
8 333 88	● Polished stainless steel
8 335 88	● Glossy gold

3 x 3 gang for 18 Arteur modules

8 331 90	● Brushed stainless steel
8 333 90	● Polished stainless steel
8 335 90	● Glossy gold

3. OVERALL DIMENSIONS (mm)

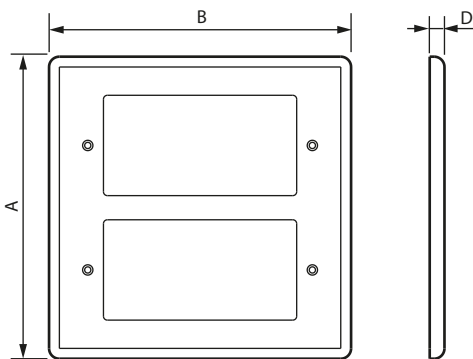

Cat. Nos	A	B	D
8 331 88 - 8 333 88 - 8 335 88	146	146	7.5
8 331 90 - 8 333 90 - 8 335 90	267	207	7.5

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 01
 Penetration by solid bodies/liquids: IP 20

■ **5.2 Material characteristics**

- BSS: austenitic Brushed Stainless Steel - non magnetic - grade 304 L
 - PSS: Polished Stainless Steel + rust resistance
 - GG: Stainless Steel + rust resistance

Halogen free

UV resistant

Self-extinguishing: 650° C / 30 s

■ **5.3 Climatic characteristics**

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:

Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 See e.catalogue.