


Belanko™ Hotel bedroom indoor control switch

Cat. No(s): 6 170 14 - 6 173 14 - 6 174 14




1. USE

Use in conjunction with hotel bedroom call indicator.
 Suitable for rooms of hotel, inns, etc. Customer can choose "do not disturb" or "Please clean up" status.
 Supplied with 2 screws M3.5 for BS boxes.
 For flush-mounting or surface mounting box.
 Fixing with screws.

2. RANGE

Description	White	Dark Grey	Brown
Internal control unit	6 170 13	6 173 13	6 174 13

3. OVERALL DIMENSIONS (mm)

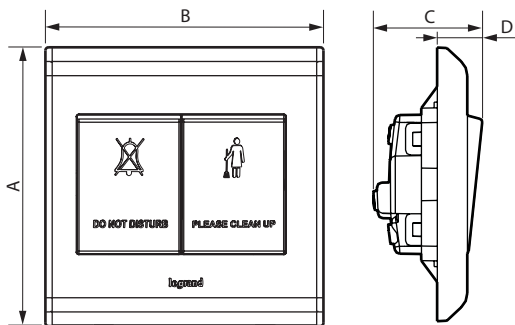

A	B	C	D
86	86	33.5	13

Distance of installation hole: 60.3 mm

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 4 x 1 mm² - 4 x 1.5 mm² - 2 x 2.5 mm² - 1 x 4 mm²
 Stripping length: 8 mm
 Screwdriver: 4 mm flat blade
 Compatible with flexible or rigid cables

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquids: IP 40

■ 5.2 Material characteristics

Thermoplastic with glossy finish (White)
 Colour: White T084: PC
 Dark Grey: PC painted
 Brown: PC painted

Halogen free
 UV resistant

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place.
 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 Vac
 Current: 10 AX

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
 Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Conform to BS EN 60669-1 - MS/IEC 60669-1 - SS227