


## Belanko™ Hotel bedroom call indicator

Cat. No(s): 6 170 13 - 6 173 13 - 6 174 13




### 1. USE

Use in conjunction with hotel bedroom indoor control switch.  
 Suitable for rooms of hotel, inns, etc. Customer can choose "do not disturb" or "Please clean up" status.  
 Supplied with 2 screws M3.5 for BS boxes.  
 For flush-mounting or surface mounting box.  
 Fixing with screws.

### 2. RANGE

Description	White	Dark Grey	Brown
Hotel bedroom call indicator	6 170 13	6 173 13	6 174 13

### 3. OVERALL DIMENSIONS (mm)

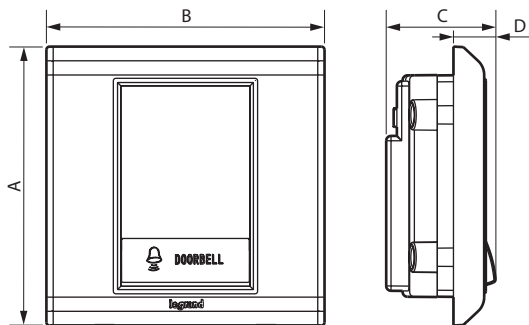

A	B	C	D
86	86	33.5	13

Distance of installation hole: 60.3 mm

### 4. CONNECTION

Type of terminals : with screws  
 Terminal capacity: 4 x 1 mm<sup>2</sup> - 4 x 1.5 mm<sup>2</sup> - 2 x 2.5 mm<sup>2</sup> - 1 x 4 mm<sup>2</sup>  
 Stripping length: 8 mm  
 Screwdriver: 4 mm flat blade  
 Compatible with flexible or rigid cables

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
 Penetration by solid bodies/liquids: IP 40

#### ■ 5.2 Material characteristics

Thermoplastic with glossy finish (White)  
 Colour: White T084: PC  
 Dark Grey: PC painted  
 Brown: PC painted

Halogen free  
 UV resistant

#### Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place.  
 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Voltage: 220 V~  
 Current: 4 A

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

### 6. CLEANING

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
 Resistance to the following cleaning substances:  
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product.

**Caution:** An initial test is required for the use of other special maintenance products.

### 7. STANDARDS AND APPROVALS

Conform to BS EN 60669-2-1