


Arteor™ Signalling devices

Cat. No(s): 5 722 24/25 - 5 727 22/24/45/46/47/48



5 722 24/25 - 5 727 22/24/45/46/47/48


1. USE

Signalling devices using different coloured LED lighting.

2. RANGE

Description	White	Magnesium	Soft Alu	Champagne
Two-colour green/red signalling device Square	5 722 24	5 727 24	5 727 45	5 727 46
Blue signalling device Square	5 722 25	5 727 22	5 727 47	5 727 48

3. OVERALL DIMENSIONS (mm)

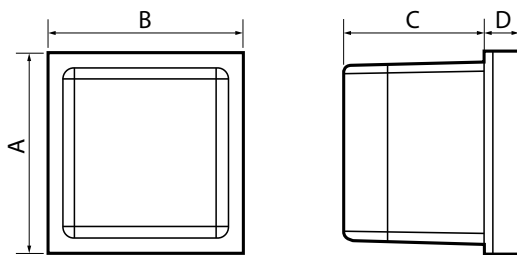

A	B	C	D
45	45	33	8.5


4. CONNECTION

Screw terminals

Terminal capacity: 1 x 2.5 mm² or 2 x 1.5 mm²

Stripping length: 8 mm

Type of screwdriver: flat-blade 3 mm
 or Philips No 1
 or posidrive No 1
 or mixed size 0

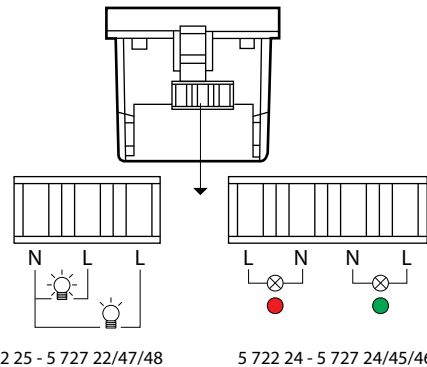

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid bodies/liquid: IP 40 (mounted)
 IP 20 (alone)

■ 5.2 Material characteristics

Base: Polycarbonate

Cover plate: ABS

Indicator light: Polycarbonate

Self-extinguishing:

- + 750° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 230 V

Frequency: 50/60 Hz

Power:

- 5 722 24 - 5 727 24/45/46: 2 x 1 W

- 5 722 25 - 5 727 22/47/48: 0.2 W or 1 W

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C

Operating temperature: - 5° C to + 50° C

5. CLEANING

Surface cleaning with a cloth

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following cleaning agents: hexane (EN-60669-1), methylated spirits, soapy water, diluted ammonia, diluted pure bleach 10%, glass cleaning substance, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

6. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.

Refer to e-catalogue.