

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;



CONTENTS	PAGES
1. USE	1
2. RANGE	1
3. DIMENSIONS AND WEIGHTS	1
4. OVERVIEW	3
5. ELECTRICAL CONNECTIONS	3
6. ELECTRICAL AND MECHANICAL CHARACTERISTICS	5
7. CONFORMITY	7
8. EQUIPMENTS AND ACCESSORIES	8
9. CURVES	10

### 1. USE

DPX<sup>3</sup> HP platform has been developed to give a new solution of protection devices for a more precise approach in power installations in order to offer the correct answer for different project needs. DPX<sup>3</sup> HP platform provide a complete project approach in premium market segment, offering a range completely suitable for high power application with high performance breakers in compact dimensions and at a competitive costs.

### 2. RANGE

Circuit breakers

	DPX <sup>3</sup> 125 HP + earth leakage	
	36 kA	50 kA
I <sub>n</sub> (A)	4P	
16	423630	423670
20	423631	423671
25	423632	423672
32	423633	423673
40	423634	423674
50	423635	423675
63	423636	423676
80	423637	423677
100	423638	423678
125	423639	423679


Switch disconnectors

DPX <sup>3</sup> -I 125 HP + earth leakage	
I <sub>n</sub> (A)	4P
125	423187


### 3. DIMENSIONS AND WEIGHTS

#### 3.1 Dimensions

Lateral view

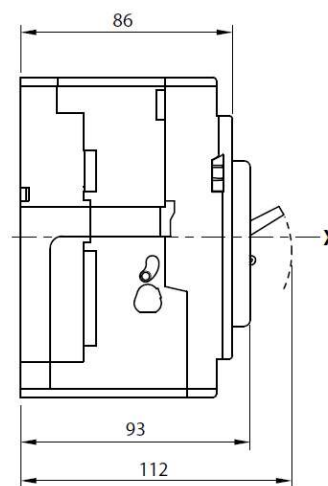

Frontal view (4 poles)

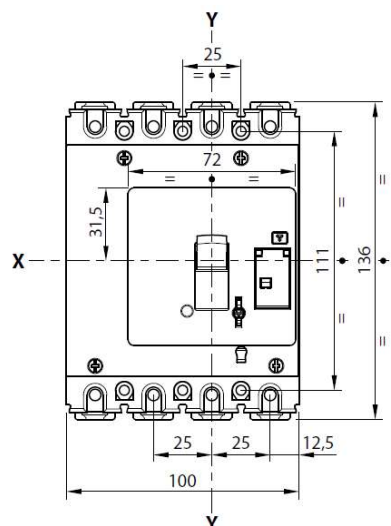

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :


from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;



4 231 87;

### Interlock


(for rear plate interlock dimension, see relative instruction sheet)

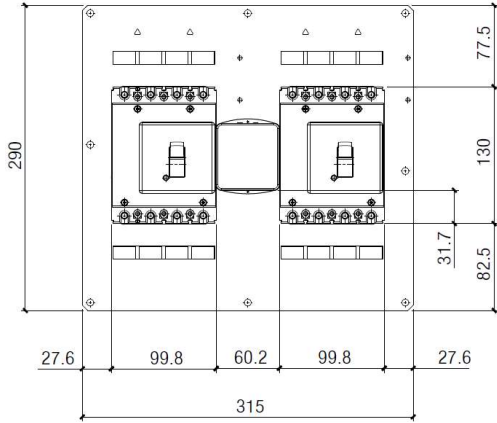


### Sealable terminal shields

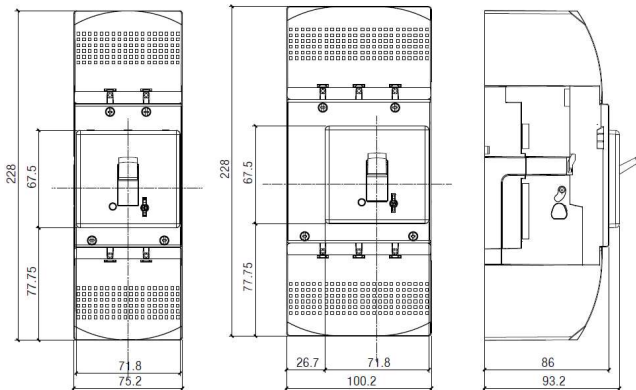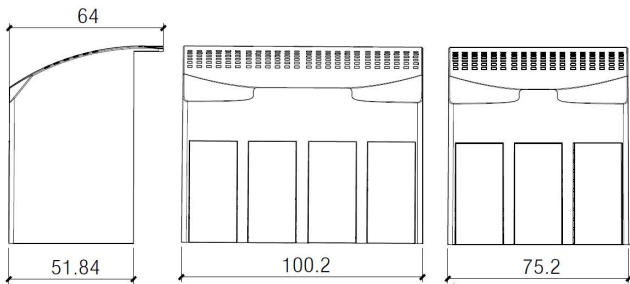

### Spreaders

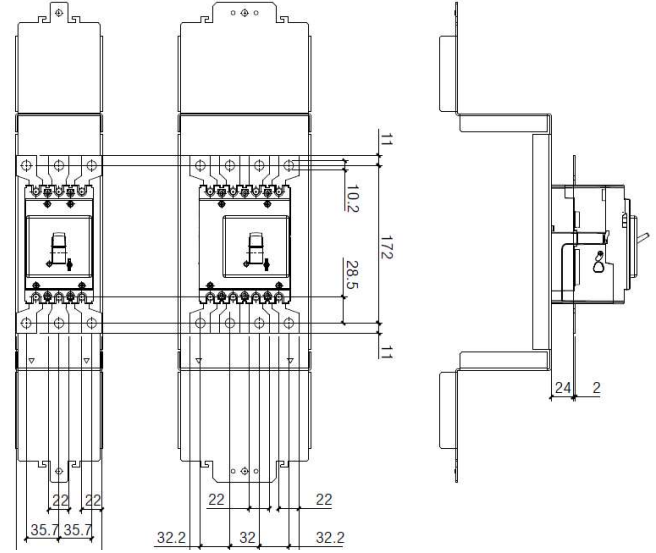

### Rear terminals

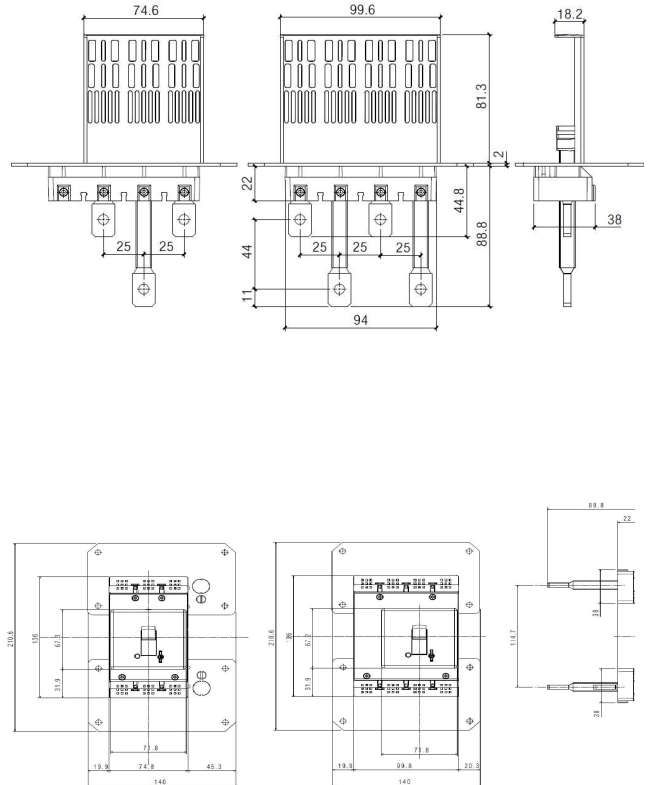

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 3.2 Weights

Configuration	Weights (Kg)
<b>4P</b>	
Circuit breaker/switch disconnector	1.4
Direct rotary handle*	0.18
Vari depth rotary handle*	0.55
Interlock*	0.35
Spreader*	0.175
* to add to device weight	

## 4. OVERVIEW

### 4.1 Supplied with:

- 4 fixing screws
- 8 screws for connections
- 3 phase insulators

## 5. ELECTRICAL CONNECTIONS



### 5.1 Mounting possibilities

On plate:



- Vertical
- Horizontal
- Supply inverter type

### 5.2 Mounting

(see instruction sheet for detailed mounting procedures)

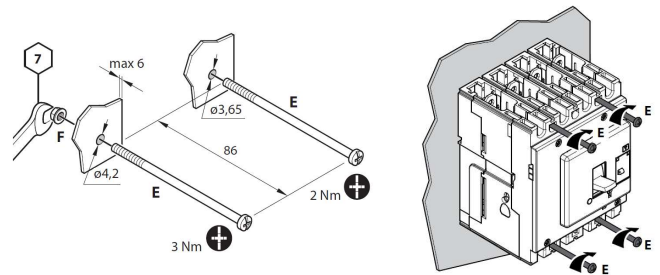
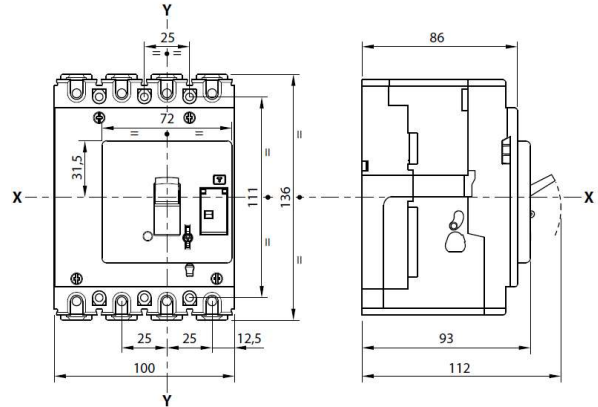


### Busbars/cable lugs:


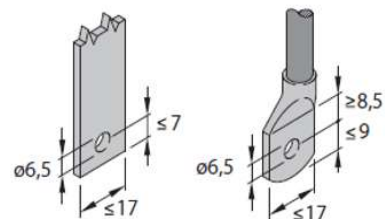


**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

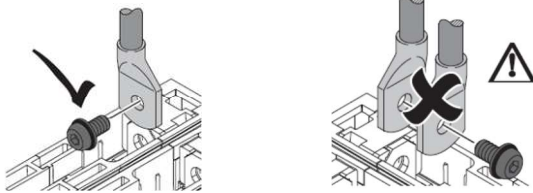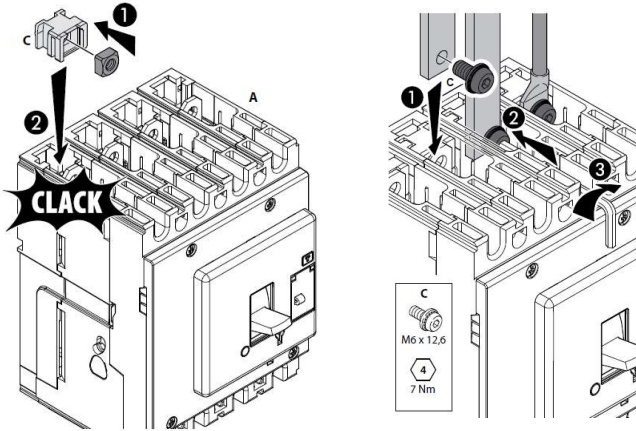

**Cables:**

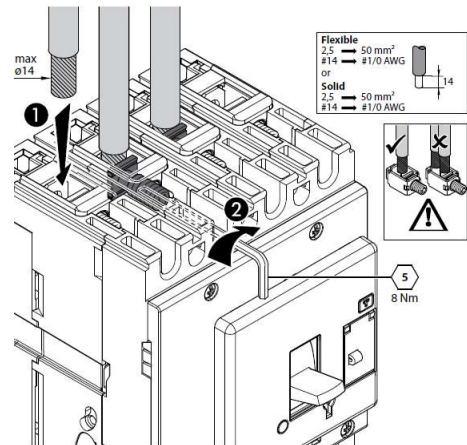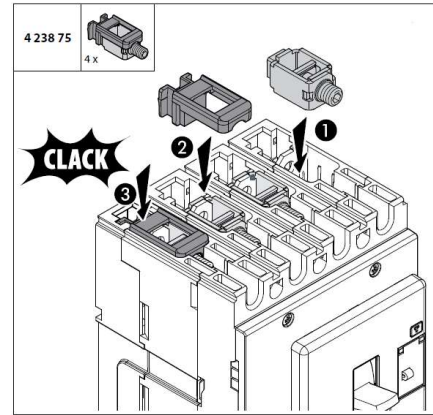

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 6. ELECTRICAL AND MECHANICAL CHARACTERISTICS


#### Circuit breaker

Circuit Breaker	DPX <sup>3</sup> 125 HP + RCD F/N (38kA, 50kA)
Rated current (A)	16-20-25-32-40-50-63-80-100-125
Poles	4
Pole pitch (mm)	25
Rated insulation voltage (50/60Hz) U <sub>i</sub> (V)	500
Rated operating voltage (50/60Hz) U <sub>o</sub> (V)	500
Rated impulse withstand current U <sub>imp</sub> (kV)	6
Rated frequency (Hz)	50 - 60
Reference ambient temperature(°C)	40 - 50
Operating temperature (°C)	-25 + 70
Mechanical endurance (cycles)	20000
Electrical endurance at I <sub>n</sub> (cycles)	8000
Utilization category	A
Suitable for isolation	Yes
Type of protection	Thermal-magnetic
Thermal adjustment I <sub>t</sub>	0.8 - 0.9 - 1 x I <sub>n</sub>
Magnetic adjustment I <sub>t</sub> (A)	400 A up to I <sub>n</sub> =40A (not adjustable); 10 x I <sub>n</sub> up to I <sub>n</sub> =125A (not adjustable);
Neutral protection for 4P (%I <sub>n</sub> of phase pole)	100
Earth leakage type	A - Integrated
Adjustable sensitivity (A)	0.03- 0.3 - 1 - 3
Adjustable tripping (s)	0 - 0.3 - 1 - 3 (with 0.03 possible only 0s)
Dimensions (W x H x D) (mm)	100 x 135 x 86 (4P)

#### Switch disconnectors

Switch	DPX <sup>3</sup> -I 125 HP
Uninterrupted nominal current I <sub>n</sub> (A)	125
Short-time relative current I <sub>sm</sub> (kA) for 1s	1.5
Rated short-circuit making capacity I <sub>sm</sub> (kA)	2.5
Rated insulation voltage U <sub>i</sub> (V AC)	500
Maximum rated operating voltage U <sub>o</sub> (V AC)	500
Rated impulse withstand voltage U <sub>imp</sub> (kV)	6
Utilization category	AC23A
Suitable for isolation	Yes
Nominal frequency (Hz)	50-60
Operating temperature (°C)	-25 + 70
Mechanical endurance (cycles)	20000
Electrical endurance at I <sub>n</sub> (cycles)	8000
Dimensions (W x H x D) (mm)	100 x 135 x 86 (4P)

### 6.1 Main parts constituting the circuit breaker

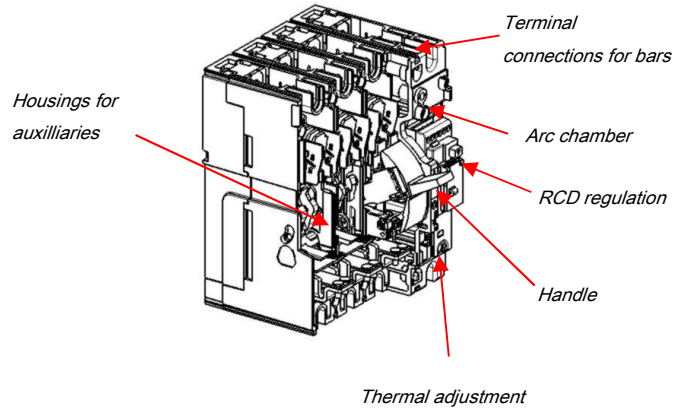

### 6.2 Breaking capacity (kA)

		Breaking capacity (kA) & I <sub>cs</sub>	
		4P	
IEC 60947-2	U <sub>e</sub> /I <sub>cu</sub> (I <sub>cu</sub> letter)	36kA (F)	50kA (N)
	220/240 V AC	70	90
	380/415 V AC	36	50
	440/460 V AC	20	25
	480/500 V AC	12	16
	I <sub>cs</sub> (% I <sub>cu</sub> )	100	100
Rated making capacity under short circuit I <sub>cm</sub>			
	I <sub>cm</sub> (kA) at 415V	76.5	105
NEMA AB-1	220/240 V AC	70	90
	480/500 V AC	12	16

### 6.3 Rated current (I<sub>n</sub>) at 40°C / 50°C

I <sub>n</sub> (A)	Phases limit trip current			
	thermal (I <sub>t</sub> )		magnetic (I <sub>t</sub> )	
	0.8 x I <sub>n</sub>	1 x I <sub>n</sub>	min	max
16	13	16	400	400
20	16	20	400	400
25	20	25	400	400
32	26	32	400	400
40	32	40	400	400
50	40	50	500	500
63	51	63	630	630
80	64	80	800	800
100	80	100	1000	1000
125	100	125	1250	1250

### 6.3 Load operations

Force on handle	N
Opening operation	40
Closing operation	40
Restore operation	53

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 6.4 Electrodynamic forces

The table below shows an indication of suggested distances to keep between the breaker and the first fixing point of the conductor and bars in order to reduce the effects of the electrodynamic stresses that may be created during a short circuit. In the realization of anchorage system it is recommend the use of isolators suitable for the type of conductor used and the operating voltage.

I <sub>cc</sub> (kA)	Maximum Distance (mm)
36	350
50	300

According to conductor type and bar system (except Legrand bar kits), the choice of the distance to keep is to be calibrated by the installer.

Also installer must take into account the weight of the conductors so that this does not affect the electrical junction between the conductor itself and the connection point.

### 6.5 Power losses per pole under I<sub>n</sub>

Circuit breaker

I <sub>n</sub> (A)	Power losses per pole (W)									
	16	20	25	32	40	50	63	80	100	125
Lugs	3.47	4.82	7.54	2.98	4.42	6.90	6.61	6.40	10.00	10.63
Spreaders	3.50	4.86	7.60	3.08	4.58	7.15	7.01	7.04	11.00	12.19
Rear terminals	3.56	4.96	7.76	3.34	4.98	7.78	8.00	8.64	13.50	16.09

Note: power losses in the table above are referred and measured as described in the standard IEC 60947-2 (Annex G) for circuit-breakers. Values in the table are referred to a single phase.

Switch disconnectors

	Power losses per pole (W)
	I <sub>n</sub> (A)
Lugs	7,81
Spreaders	9,38
Rear terminals	13.28

Note: power loss in the table above are referred and measured as described in the standard IEC 60947-3 for switches. Values in the table are referred to a single phase.

### 6.6 DERATINGS

according to IEC/EN 60947-1

#### 6.6.1 Temperature

Rated current and his adjustment has to be considered relating to a rise or fall of ambient temperature and to a different version or installation conditions. The table below indicates the maximum long-time (LT) protection setting depending on the ambient temperature.

I <sub>n</sub> (A)	Temperature T <sub>a</sub> (°C)										
	-20	-10	-5	0	10	20	30	40	50	60	70
16	20	20	19	19	18	17	17	16	16	15	14
20	25	24	24	23	23	21	21	20	20	18	17
25	31	30	30	29	28	27	26	25	25	23	22
32	40	39	38	37	36	35	33	32	32	29	28
40	50	49	48	47	45	43	42	40	40	37	35
50	62	61	59	58	56	54	52	50	50	45	43
63	79	77	75	74	71	68	65	63	63	57	54
80	100	97	95	93	90	86	83	80	80	73	69
100	125	121	119	117	112	108	104	100	100	91	86
125	157	151	148	146	140	135	130	125	125	114	108

For derating temperature with other configurations, see table A.

#### 6.6.2 Specific condition use

Climatic conditions

according to IEC/EN 60947-1 Annex Q, Cat. F subject to temperature, humidity, vibration, shock and salt mist.

Pollution degree

for DPX<sup>3</sup> 125 HP circuit breakers, degree 3, according to IEC/EN 60947-2

#### 6.6.3 Altitude

Altitude derating for DPX<sup>3</sup> and DPX<sup>3</sup>-I with RCD

Altitude (m)	2000	3000	4000	5000
U <sub>e</sub> (V)	500	430	380	330
I <sub>n</sub> (A) (T <sub>a</sub> = 40°C/50°C)	1 x I <sub>n</sub>	0.98 x I <sub>n</sub>	0.93 x I <sub>n</sub>	0.9 x I <sub>n</sub>

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 7. CONFORMITY

DPX<sup>3</sup> HP range of product concerning circuit-breakers and switch-disconnectors exceed compliance with the IEC/EN standard 60947-2 and 60947-3 respectively. Certification available by IECEE CB-scheme or LOVAG Compliance scheme.

DPX<sup>3</sup> HP respect the European Directives REACH, RoHS, RAEE.

*For specific information, please contact Legrand support*

### 7.1 Marking


Product (both circuit breakers and switch disconnectors) are provided with labelling in full conformity to the referred standard and directives requirements by laser or sticker labels (for illustrative purposes only) as:

#### Product laser label on front

- Manufacturer responsible
- Denomination, type product, code
- Standard conformity
- Standard characteristics declared
- Coloured identification of I<sub>cu</sub> at 415V


#### Product sticker label on side

- Manufacturer responsible
- Denomination and type product
- Standard conformity
- Mark/Licence (if any)
- Directive requirements
- Bar code identification product
- Manufacturing Country

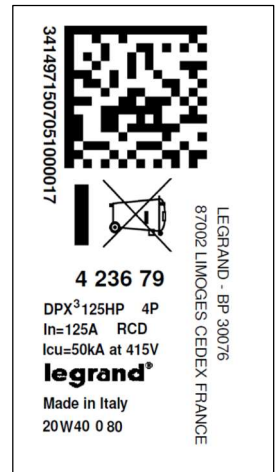



#### Mark sticker label on side

- Product code
- Mark/Licence (if any)
- Country deviation, if any

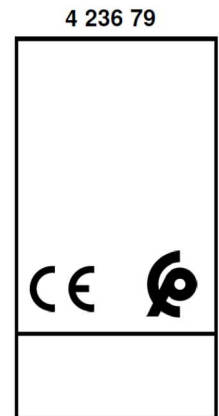

#### Packaging sticker label

- Manufacturer responsible
- Denomination and type product
- Mark/Licence (if any)
- Directive requirements
- Bar code identification product

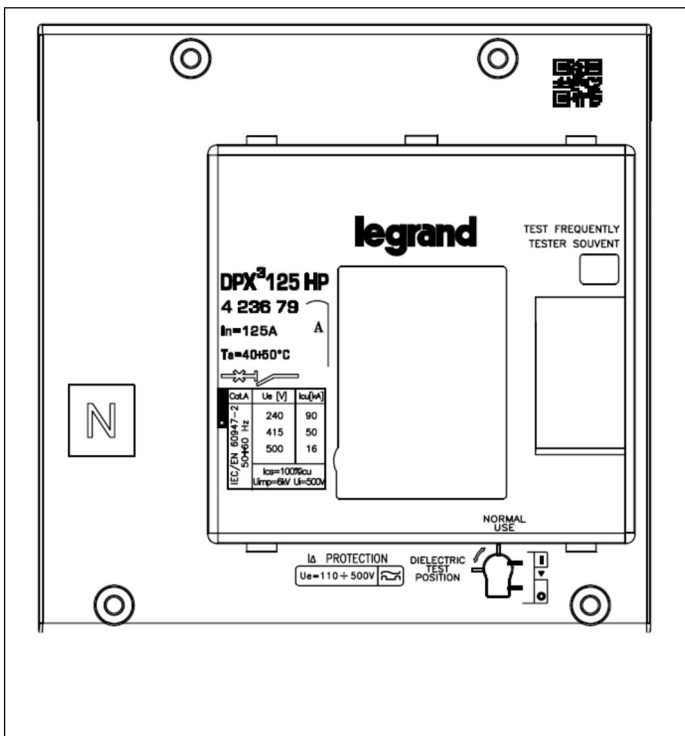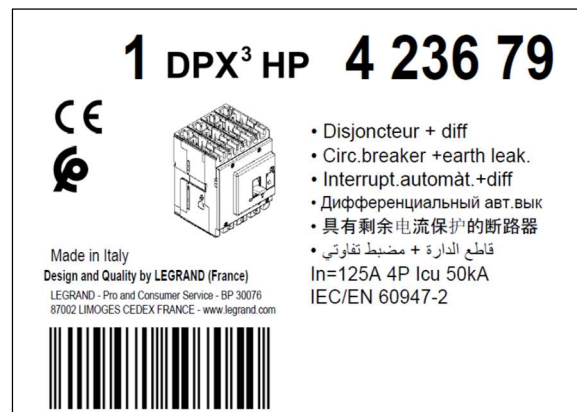

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 8. EQUIPMENTS AND ACCESSORIES

#### 8.1 Releases (for DPX<sup>3</sup> 125/250 HP and DPX<sup>3</sup> 160/250)

- shunt releases with voltage:

12 Vac and dc

ref. 4 210 12

24 Vac and dc

ref. 4 210 13

48 Vac and dc

ref. 4 210 14

110÷130 Vac

ref. 4 210 15

220÷277 Vac

ref. 4 210 16

380÷480 Vac

ref. 4 210 17

Maximum power = 400 VA / W

- undervoltage releases with voltage:

12 Vac and dc

ref. 4 210 18

24 Vac and dc

ref. 4 210 19

48 Vac and dc

ref. 4 210 20

110÷130 Vac and dc

ref. 4 210 21

220÷240 Vac

ref. 4 210 22

277 Vac

ref. 4 210 23

380÷415 Vac

ref. 4 210 24

440÷480 Vac

ref. 4 210 25

Maximum power = 4 VA

Circuit breaker opening time < 50 ms

UVR releases can be used on DPX<sup>3</sup> 125/250 HP starting from batch 19W15

- time-lag undervoltage releases (800 ms)

*Time-lag modules with voltage:*

230 V ac

ref. 0 261 90

400 V ac

ref. 0 261 91

Release






ref. 4 210 98

(to be equipped with a time-lag module 0 261 90/91)

#### 8.2 Auxiliary contacts

For version of DPX<sup>3</sup> 125 HP thermal magnetic, with earth leakage module, auxiliary contacts are integrated inside module M.C.I (see instruction sheet for details).

Here a connection scheme to get auxiliary functionality:

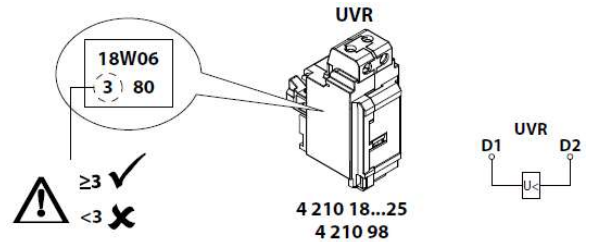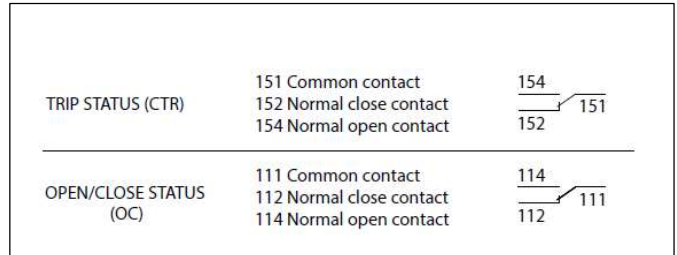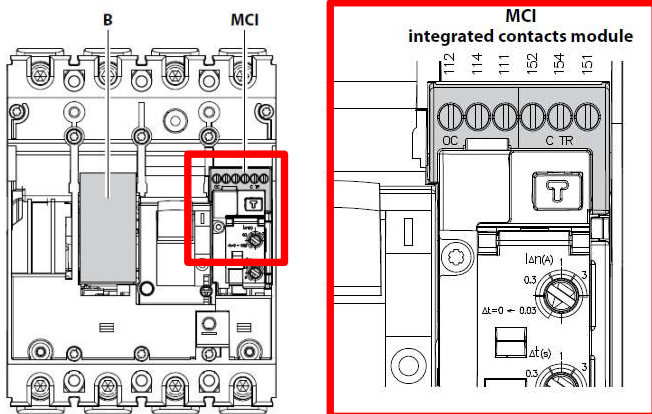

	B
UVR	✓
ST	(max 1)
OC/CTR	✗

To get more information on auxiliary mounting procedures, please refer to product instruction sheet.

#### 8.3 Universal keylocks

These keylocks must be used for all the accessories that can be locked:

- rotary handle

For each of these, a specific accessory (indicated in the specific section of this datasheet) must be added in order to get the complete locking kits for the specific application.

- 1 lock + 1 flat key with random mapping ref. 4 238 80
- 1 lock + 1 flat key with fixed mapping (EL43525) ref. 4 238 81
- 1 lock + 1 flat key with fixed mapping (EL43363) ref. 4 238 82
- 1 lock + 1 star key with random mapping ref. 4 238 83



# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers

## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :

from 4 236 30 to 4 236 39;

from 4 236 70 to 4 236 79;

4 231 87;

### 8.4 Mechanical accessories

- Padlock (for locking in "OPEN" position) *ref. 4 210 49*  
(*ref. 4 210 49 is compatible with DPX<sup>3</sup> 250 HP and DPX<sup>3</sup> 160/250*)
- Sealable terminal shields:
  - Set of 3 (for 4P) *ref. 4 238 94*
- Insulated shields:
  - Set of 3 (for 4P) *ref. 4 238 35*  
(*ref. 4 238 35 is compatible with DPX<sup>3</sup> 250 HP*)

### 8.5 Connection accessories

#### **Cage terminals**

- Set of 3 terminals for cables 50 mm<sup>2</sup> max (solid) *ref. 4 238 74*  
or 50 mm<sup>2</sup> max (flexible) Cu/Al
- Set of 4 terminals for cables 50 mm<sup>2</sup> max (rigid) *ref. 4 238 75*  
or 50 mm<sup>2</sup> max (flexible) Cu/Al
- Set of 3 terminals (high capacity) *ref. 4 238 76*  
for cables 70 mm<sup>2</sup> max for Cu and 95 mm<sup>2</sup> max for Al  
*Section relative to maximum current is 70 mm<sup>2</sup> (for Al)*
- Set of 4 terminals (high capacity) *ref. 4 238 77*  
for cables 70 mm<sup>2</sup> max for Cu and 95 mm<sup>2</sup> max for Al  
*Section relative to maximum current is 70 mm<sup>2</sup> (for Al)*

### 8.6 Interlock mechanism

(for interlocking 2 DPX<sup>3</sup> 125 HP or 2 DPX<sup>3</sup> 250 HP breakers)

No frame mixing in interlock mechanism

- Interlock mechanism – standard version *ref. 4 238 27*  
(for fixed version DPX<sup>3</sup> 125 HP and DPX<sup>3</sup> 250 HP)
- Interlock mechanism – for electronic module *ref. 4 238 28*  
(for fixed version DPX<sup>3</sup> 125 HP and DPX<sup>3</sup> 250 HP)
- Interlock plate for DPX<sup>3</sup> 125 HP *ref. 4 238 25*

# DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers


## DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

### 9. CURVES

#### 9.1.1 Thermal magnetic tripping curve (rated current $I_n \leq 80A$ )

Update: 11/06/2019

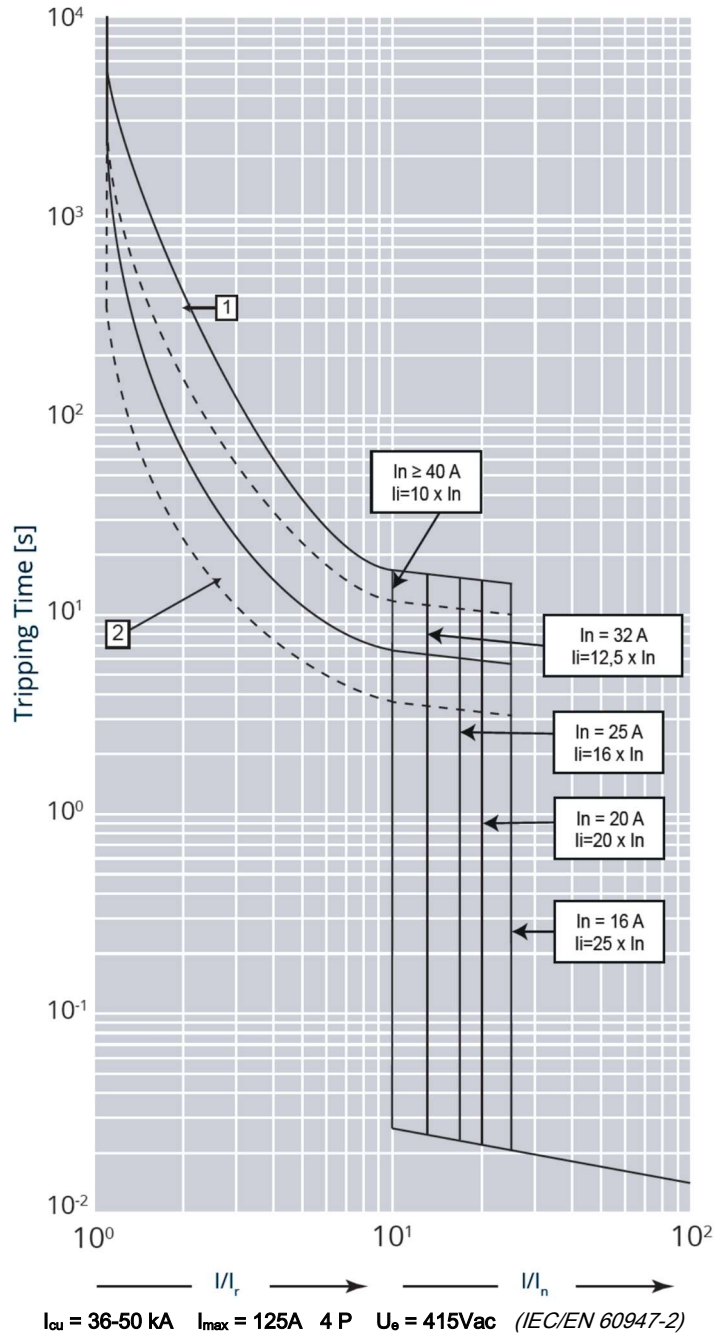


Value	Description
t	time
I	current
$I_n$	rated current
$I_r$	long time setting current
curve 1	characteristic with cold start
curve 2	characteristic with hot start

**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

**9.1.2 Thermal magnetic tripping curve (rated current  $I_n > 80A$ )**

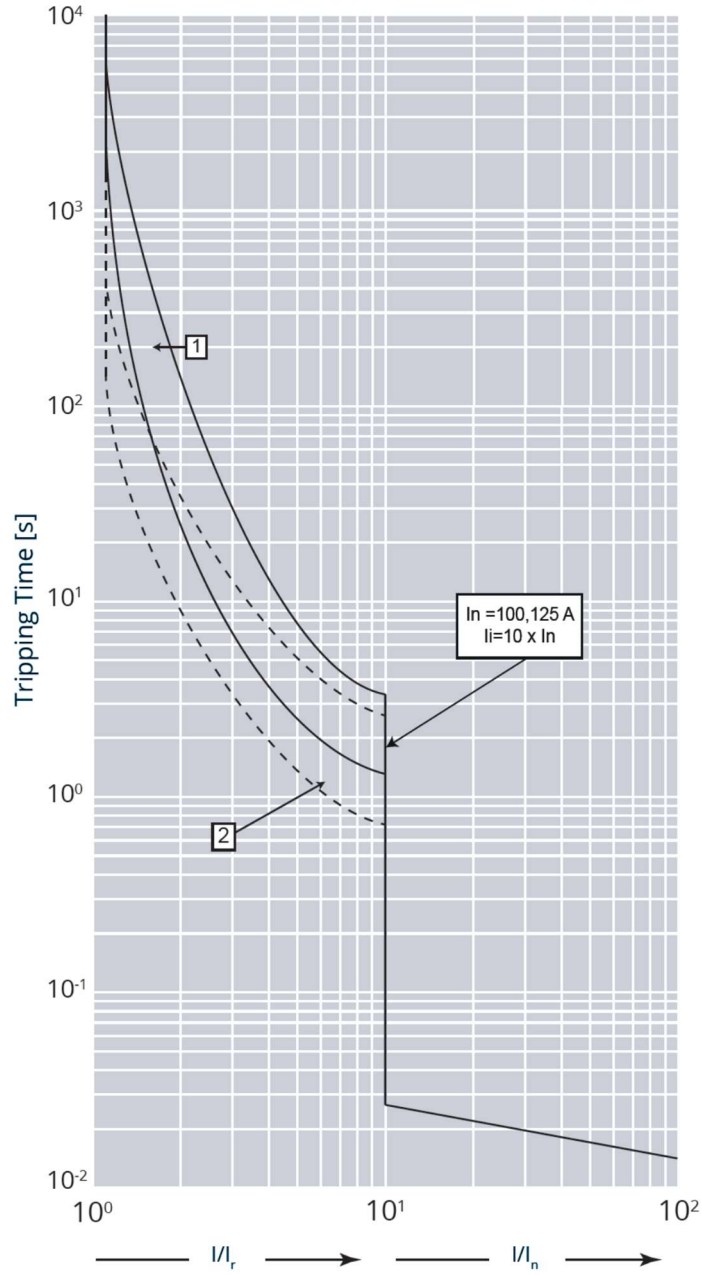

$I_{cu} = 36-50 \text{ kA}$     $I_{max} = 125A$     $4 P$     $U_o = 415Vac$    (IEC/EN 60947-2)


Value	Description
t	time
I	current
$I_n$	rated current
$I_r$	long time setting current
curve 1	characteristic with cold start
curve 2	characteristic with hot start

**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

9.2 Pass-through specific energy characteristic curve

Update: 04/09/2019

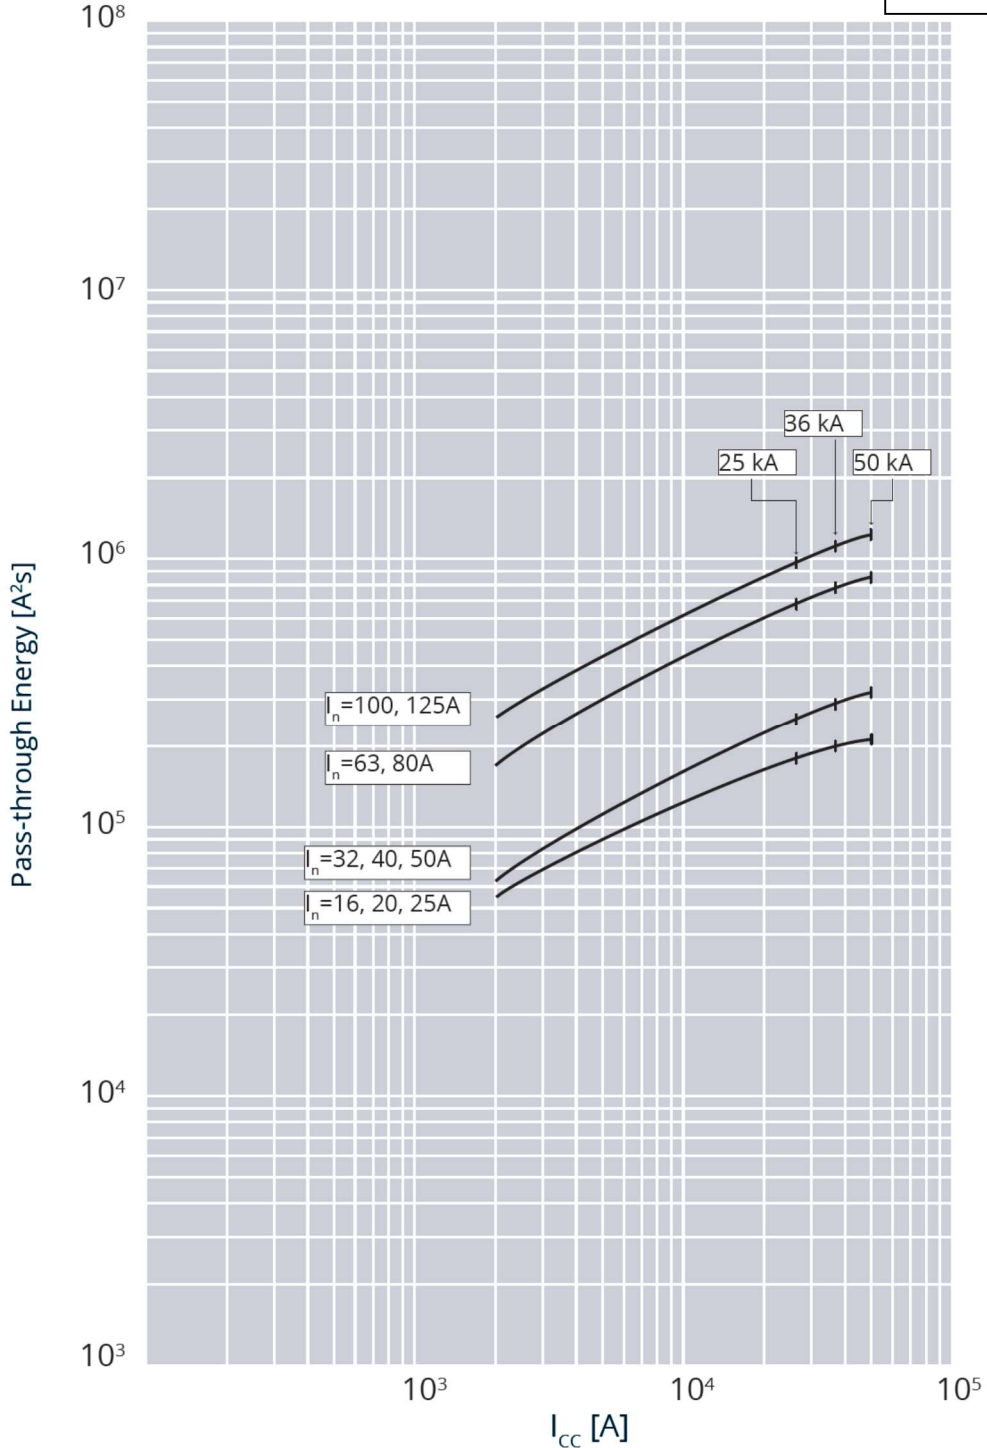

$I_{cu} = 36-50 \text{ kA}$   $I_{max} = 125A$  4 P  $U_o = 415Vac$  (IEC/EN 60947-2)


Value	Description
$I_{cc}$	short circuit current
$I^2t$ ( $A^2s$ )	pass-through specific energy

**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

9.3 Cut-off peak current characteristic curve (kA)

Update: 04/02/2020

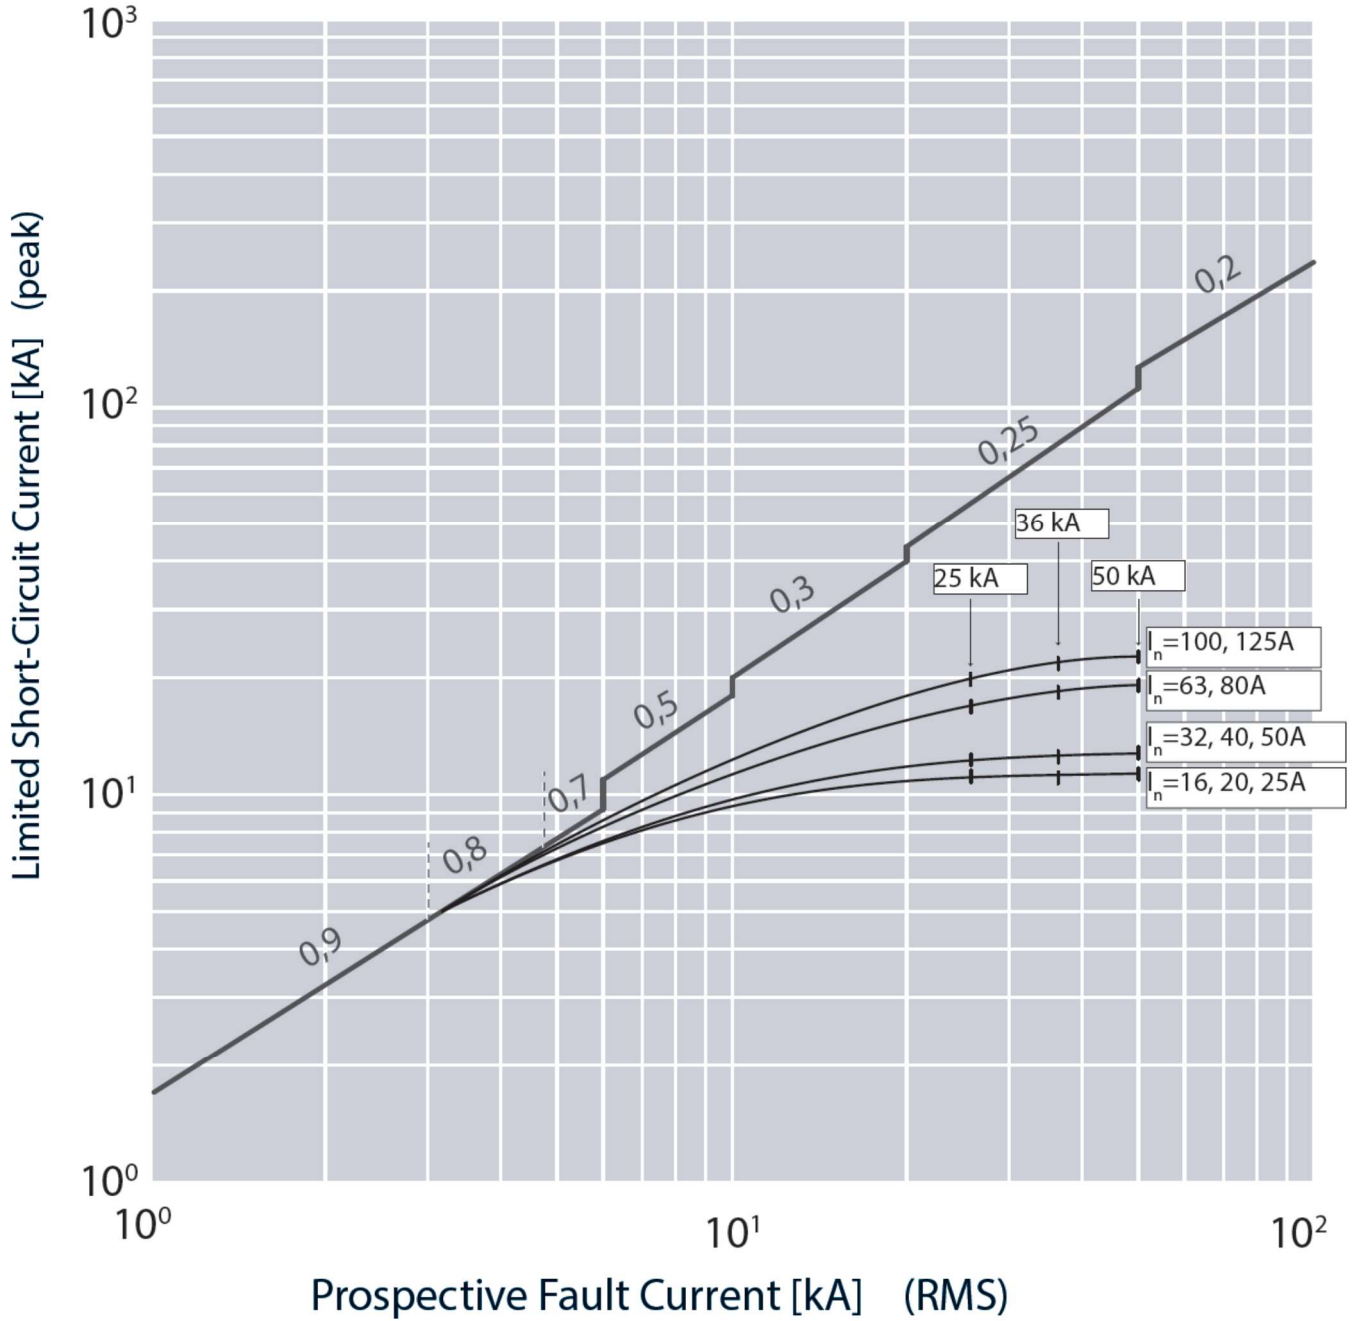


$I_{cu} = 36-50 \text{ kA}$   $I_{max} = 125A$  4 P  $U_o = 415V_{ac}$  (IEC/EN 60947-2)

Value	Description
$I_{cc}$	estimated short circuit symmetrical current (RMS value)
$I_p$	maximum short circuit peak current
	maximum prospective short circuit peak current corresponding at the power factor
	maximum real peak short circuit current


**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
from 4 236 30 to 4 236 39;  
from 4 236 70 to 4 236 79;  
4 231 87;

**9.4.1 Earth leakage curves, instantaneous**

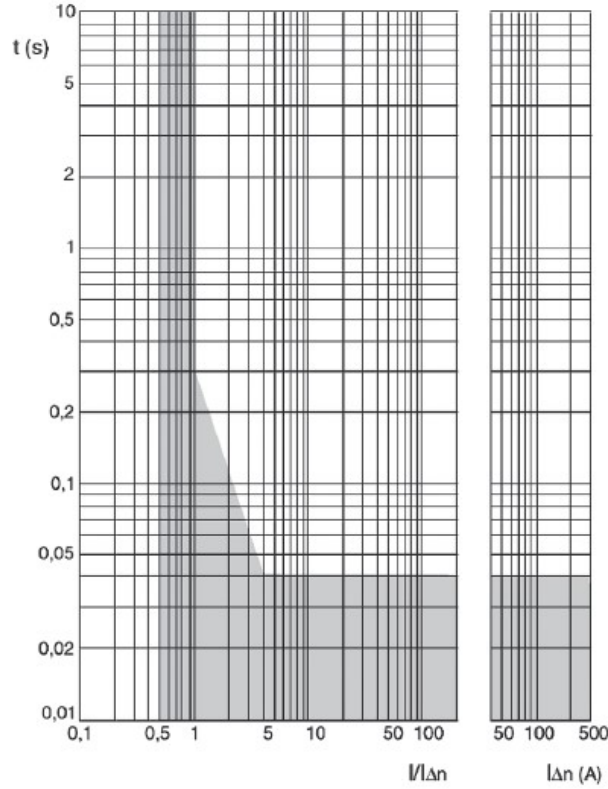


**9.4.2 Earth leakage curves, time delay = 0.3 s**

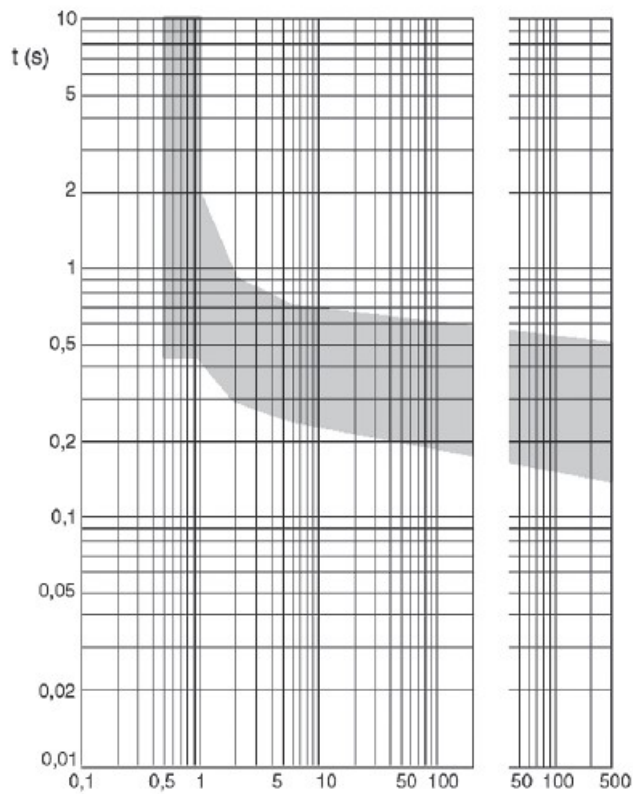


**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

**9.4.3 Earth leakage curves, time delay = 1 s**

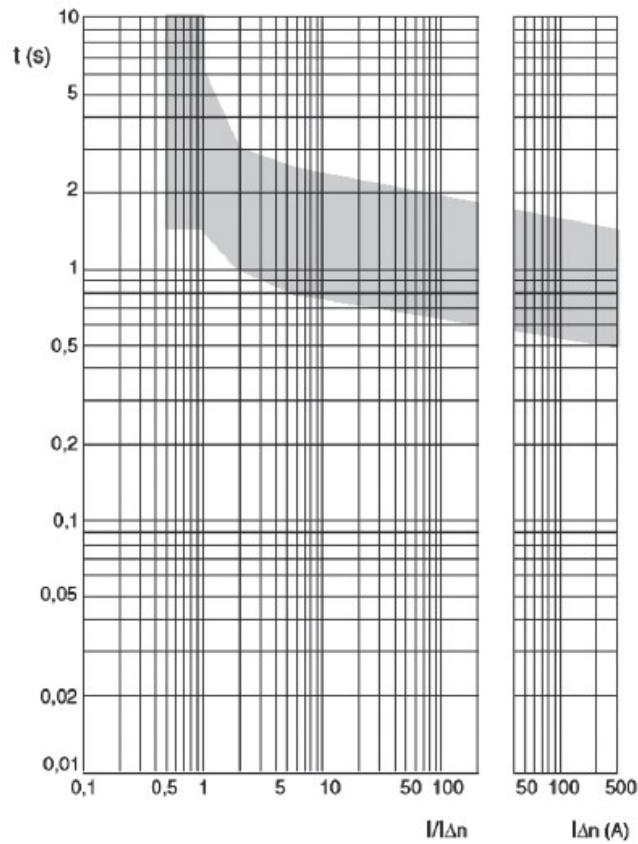

**9.4.4 Earth leakage curves, time delay = 3 s**

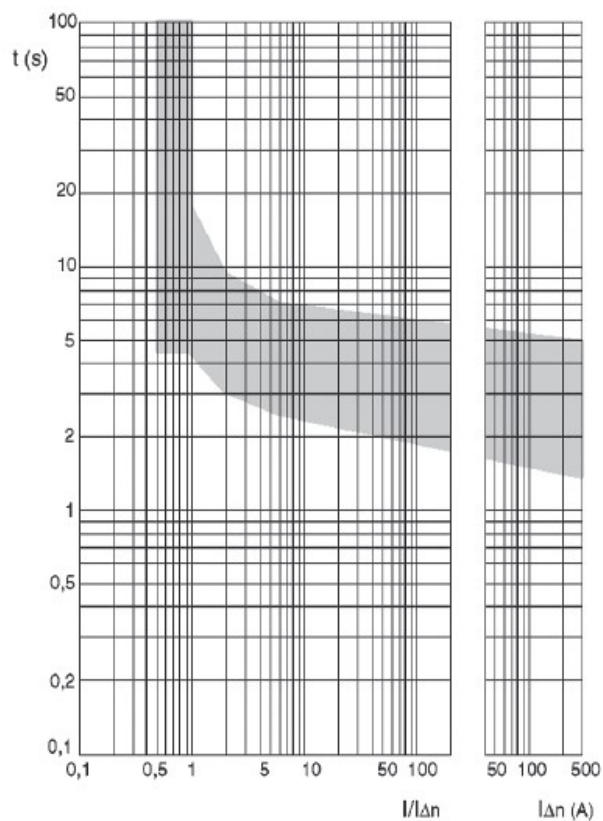

**DPX<sup>3</sup> 125 HP thermal magnetic with earth leakage circuit breakers**  
**DPX<sup>3</sup>-I 125 HP switch disconnectors with earth leakage**

Reference(s) :  
 from 4 236 30 to 4 236 39;  
 from 4 236 70 to 4 236 79;  
 4 231 87;

**A) Derating Temperature and configurations**

	Ambient temperature									
	30 °C		40 °C		50 °C		60 °C		70 °C	
<b>Fixed version</b>	<b>I<sub>max</sub> (A)</b>	<b>I<sub>r</sub> / I<sub>n</sub></b>	<b>I<sub>max</sub> (A)</b>	<b>I<sub>r</sub> / I<sub>n</sub></b>	<b>I<sub>max</sub> (A)</b>	<b>I<sub>r</sub> / I<sub>n</sub></b>	<b>I<sub>max</sub> (A)</b>	<b>I<sub>r</sub> / I<sub>n</sub></b>	<b>I<sub>max</sub> (A)</b>	<b>I<sub>r</sub> / I<sub>n</sub></b>
Cage terminals, flexible cable	128	1.02	125	1	125	1	113	0.90	106	0.85
Cage terminals, rigid cable	128	1.02	125	1	125	1	113	0.90	106	0.85
Lugs, flexible cable	128	1.02	125	1	125	1	113	0.90	106	0.85
Lugs, rigid cable	128	1.02	125	1	125	1	113	0.90	106	0.85
Spreaders, flexible cable	128	1.02	125	1	125	1	113	0.90	106	0.85
Spreaders, rigid cable	128	1.02	125	1	125	1	113	0.90	106	0.85

*For further technical information, please contact Legrand technical support.*