



Belanko™ Multistandard switched socket outlets

Cat. No(s): 6 170 67/69 - 6 173 67/69 - 6 174 67/69



6 170 67

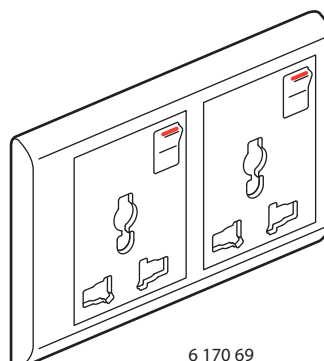

6 170 69


1. USE

Multistandard switched socket outlets, complete delivered.
 For surface or flush-mounting, 35 mm depth BS box.
 Fixing with screws.

2. RANGE

Description	White	Dark Grey	Brown
2 P+E switched socket outlet 1 gang	6 170 67	6 173 67	6 174 67
2 P+E switched socket outlet 2 gang	6 170 69	6 173 69	6 174 69

3. OVERALL DIMENSIONS (mm)

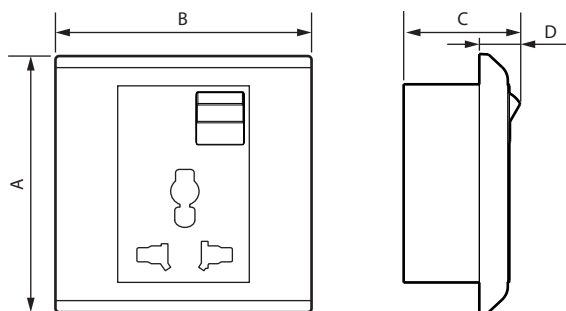

Cat. Nos	A	B	C	D
6 17x 67	86	86	41	13
6 17x 69	86	146	41	13

4. CONNECTION

Type of terminals : with screws
 Terminal capacity: 3 x 2.5 mm² - 3 x 4 mm² - 2 x 6 mm²
 Stripping length: 8 mm
 Screwdriver: 5.5 mm flat blade
 Compatible with flexible or rigid cables

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquids: IP 40

■ 5.2 Material characteristics

Thermoplastic with glossy finish (White)
 Colour: White T084: PC
 Dark Grey: PC painted
 Brown: PC painted

Halogen free
 UV resistant

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place.
 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~ - Current: 16 A
 Voltage: 127 V~ - Current: 15 A
 Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

6. CLEANING

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:
 Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia,
 Diluted pure bleach 10%, Glass cleaning product.

Caution: An initial test is required for the use of other special maintenance products.

7. STANDARDS AND APPROVALS

Compliance with IEC 60884-1 Safety requirements.