



Arteor™
White plates for italian and US standard


Cat. No(s): 5 752 40/50/60/70/80/90
5 753 00/20/60 - 5 754 10
5 756 30/40/50/60/70 - 5 767 20



5 752 40



5 752 50













5 756 30







1. USE

Plates for covering mechanisms.


2. RANGE

	Designation	Cat. No.	No of modules	Fixing method	Weight (g)
	1 module plate square (2" x 4")	5 752 40	1	with clips	41.5
	1 module plate square vertical (2" x 4")	5 767 20	1	with clips	42
	2 modules plate square (2" x 4")	5 752 50	2	with clips	40.9
	2 modules plate square (2" x 4")	5 752 60	2	with clips	43.9
	2 modules plate round (2" x 4")	5 756 30	2	with clips	42.2
	2 modules plate round (4" x 4")	5 756 40	2	with clips	45.2
	3 modules plate square (2" x 4")	5 752 70	3	with clips	36.1
	3 modules plate square (4" x 4")	5 752 80	3	with clips	53.7
	3 modules plate round (2" x 4")	5 756 50	3	with clips	38.2
	3 modules plate round (4" x 4")	5 756 60	3	with clips	53.5

2. RANGE (continued)

	Designation	Cat. No.	No of modules	Fixing method	Weight (g)
	4 modules plate square (4" x 4")	5 752 90	4	with clips	49
	2 x 3 modules plate square (4" x 4")	5 753 00	2 x 3	with clips	44
	2 x 3 modules plate round (4" x 4")	5 756 70	2 x 3	with clips	47.8
	Blanking cover plate US (4" x 4")	5 753 60		with clips	59.1
	Blanking cover plate Italian - US (2" x 4")	5 754 10		with clips	43.2
	Plate for 4 modules socket	5 753 20		with clips	32.6

3. OVERALL DIMENSIONS

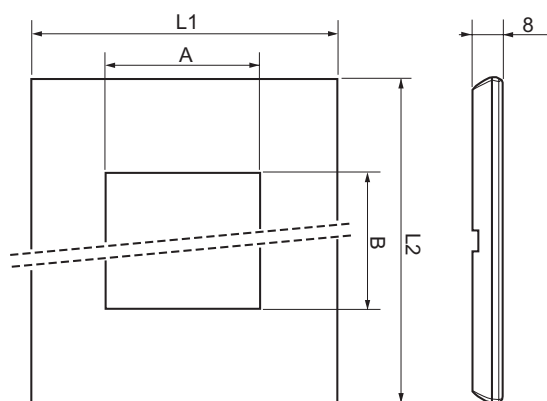

4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver.
 No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box.
 Protection film must be removed only once site work is fully completed.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 04

5.2 Material characteristics

Front plate: polycarbonate

Under plate: polycarbonate

5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfianos, Bactilycine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Arteor plates must not be painted.

Cat. No.	L1	L2	A	B
5 752 40	92	127	45.4	22.8
5 752 50				45.4
5 752 60	68			
5 752 70	92		90	45.4
5 752 80			2 x 45.4	2 x 68
5 752 90	127		45.4	90
5 753 00				
5 753 20	92			
5 753 60	127			
5 754 10	92			
5 756 30				
5 756 40	127			
5 756 50	92	45.4	68	
5 756 60				
5 756 70	127	2 x 45.4	2 x 68	
5 767 20		92	22.8	45.4