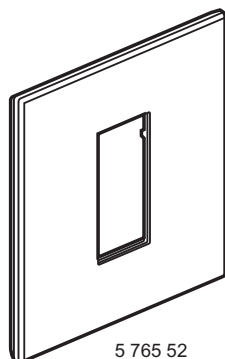
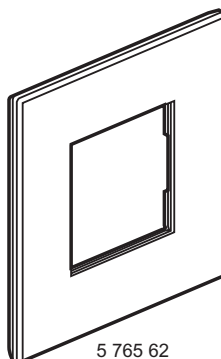


**Arteor™**  
**Graphite plates**  
**for franco-belgian and german standard**

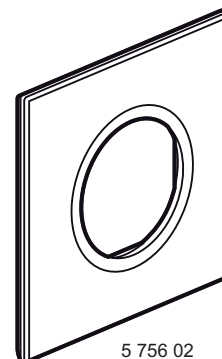
Cat. No(s): 5 750 22/32/42/52/62 - 5 755 12/22 - 5 756 02  
5 765 52/62



5 765 52



5 765 62










5 756 02

**1. USE**

Plates for covering mechanisms.




**2. RANGE**

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	1 module plate square	5 765 52	1	with clips	23.6
	2 modules plate square	5 765 62	2	with clips	22
	2 modules plate round	5 756 02	2	with clips	27.9
	2 x 2 modules plate square	5 750 22	2 x 2	with clips	33.5
	2 x 2 modules plate round	5 755 12	2 x 2	with clips	36.8
	4 modules plate square	5 750 32	4	with clips	33.7
	3 x 2 modules plate square	5 750 52	3 x 2	with clips	50

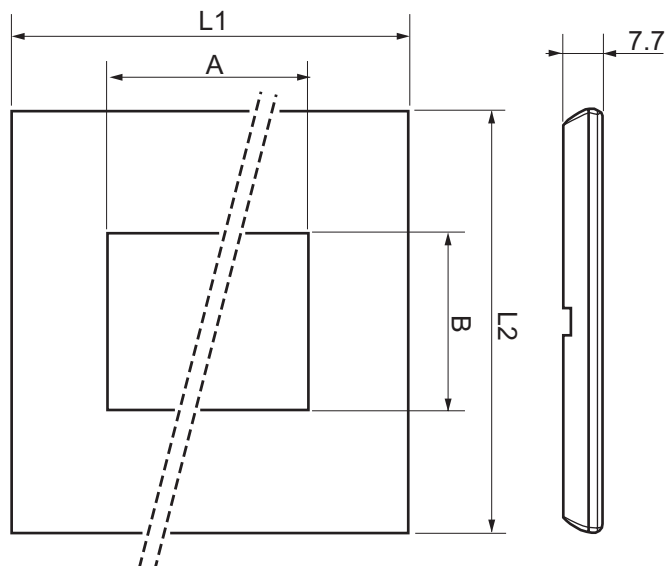
**Arteor™**  
**Graphite plates**  
**for franco-belgian and german standard**

Cat. No(s): 5 750 22/32/42/52/62 - 5 755 12/22 - 5 756 02  
 5 765 52/62

**2. RANGE** (continued)

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	3 x 2 modules plate round	5 755 22	3 x 2	with clips	63
	6 modules plate square	5 750 42	6	with clips	50.3
	2 x 6 modules plate square horizontal mounting	5 750 62	2 x 6	with clips	96

**3. OVERALL DIMENSIONS**



Cat. No.	L1	L2	A	B
5 750 22	157	92	2 x 45.4	2 x 45.4
5 750 32			90.6	45.4
5 750 42	135.8			
5 750 52	237.5	178	3 x 45.4	3 x 45.4
5 750 62			2 x 135.8	2 x 45.4
5 755 12	157	92	2 x Ø 45.4	
5 755 22	237.5		3 x Ø 45.4	
5 756 02	92		Ø 45.4	
5 765 52		92	22.5	45.4
5 765 62			45.4	

**4. MOUNTING**

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver. No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box. Protection film must be removed only once site work is fully completed.

**5. TECHNICAL CHARACTERISTICS**

**5.1 Mechanical characteristics**

Impact tests: IK 04

**5.2 Material characteristics**

Front plate: polycarbonate  
 Under plate: polycarbonate

**5.3 Climatic characteristics**

Storage temperatures: - 10° C to + 70° C  
 Operating temperatures: - 5° C to + 50° C

**6. CLEANING**

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

**6.1 Resistance to cleaning agents**

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

**6.2 Resistance to hospital-type cleaning agents**

Resistance to the following agents: Anios, Surfanios, Bactily sine, Hydrogen peroxyde (30%).

**7. SPECIAL USE**

Arteor plates must not be painted.