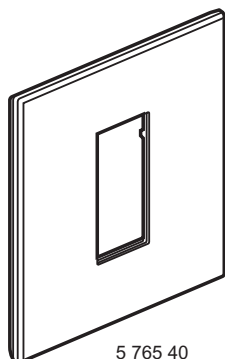
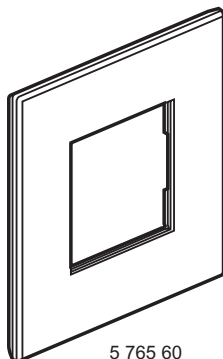


Arteor™
White plates
for franco-belgian and german standard

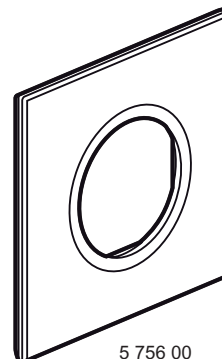
Cat. No(s): 5 750 20/30/40/50/60 - 5 755 10/20 - 5 756 00
5 765 40/60



5 765 40



5 765 60










5 756 00

1. USE

Plates for covering mechanisms.




2. RANGE

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	1 module plate square	5 765 40	1	with clips	23.6
	2 modules plate square	5 765 60	2	with clips	22
	2 modules plate round	5 756 00	2	with clips	27.9
	2 x 2 modules plate square	5 750 20	2 x 2	with clips	33.5
	2 x 2 modules plate round	5 755 10	2 x 2	with clips	36.8
	4 modules plate square	5 750 30	4	with clips	33.7
	3 x 2 modules plate square	5 750 50	3 x 2	with clips	50

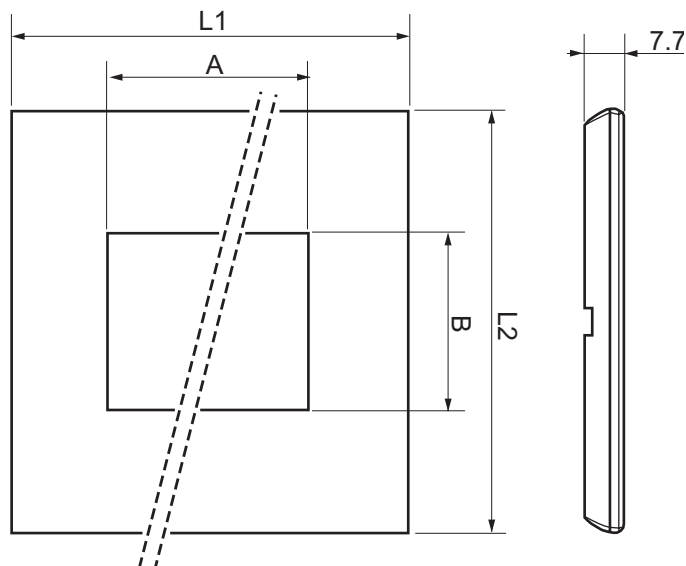
Arteor™
White plates
for franco-belgian and german standard

Cat. No(s).: 5 750 20/30/40/50/60 - 5 755 10/20 - 5 756 00
 5 765 40/60

2. RANGE (continued)

	Designation	Cat. No.	Number of modules	Fixing method	Weight (g)
	3 x 2 modules plate round	5 755 20	3 x 2	with clips	63
	6 modules plate square	5 750 40	6	with clips	50.3
	2 x 6 modules plate square horizontal mounting	5 750 60	2 x 6	with clips	96

3. OVERALL DIMENSIONS



Cat. No.	L1	L2	A	B
5 750 20	157	92	2 x 45.4	2 x 45.4
5 750 30			90.6	45.4
5 750 40	135.8			
5 750 50	237.5	178	3 x 45.4	3 x 45.4
5 750 60			2 x 135.8	2 x 45.4
5 755 10	157	92	2 x Ø 45.4	
5 755 20	237.5		3 x Ø 45.4	
5 756 00	92		Ø 45.4	
5 765 40		92	22.5	45.4
5 765 60			45.4	

4. MOUNTING

The plates clip on in notches onto screw-type or claw-type mounting supports (notches are used for thickness compensation. E.g: wall paper). Easy to remove with a screwdriver. No flatness defect of more than 1.5 mm in a periphery of 10 cm around the installed flush box. Protection film must be removed only once site work is fully completed.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 04

5.2 Material characteristics

Front plate: polycarbonate
 Under plate: polycarbonate

5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
 Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactily sine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Arteor plates must not be painted.