



Valena™ Allure
Plates Plating finish

Cat. No(s): 7 544 21/22/23/24/25/31/32/33/34/35/41/42/43/44/45
7 544 51/52/53/54/55/61/62/63/64/65/71/72/73/74/75
7 542 81/82/83/84/85/91/92/93/94/95



7 544 21

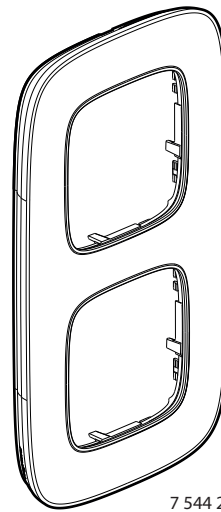

7 544 22

1. USE

Face plates for Valena Allure: 1 - 2 - 3 - 4 and 5-gang wiring accessories.
 Available in several colours.
 Can be transformed in vertical or horizontal plate by rotation of internal trim.


2. RANGE

1-gang plates	White Mirror	7 544 21
	Black Baroque	7 544 31
	Purple Baroque	7 544 41
	Leather	7 544 51
	Walnut	7 544 61
	Carbon	7 544 71
	Stainless Steel	7 542 81
	Dark Stainless Steel	7 542 91
2-gang plates	White Mirror	7 544 22
	Black Baroque	7 544 32
	Purple Baroque	7 544 42
	Leather	7 544 52
	Walnut	7 544 62
	Carbon	7 544 72
	Stainless Steel	7 542 82
	Dark Stainless Steel	7 542 92
3-gang plates	White Mirror	7 544 23
	Black Baroque	7 544 33
	Purple Baroque	7 544 43
	Leather	7 544 53
	Walnut	7 544 63
	Carbon	7 544 73
	Stainless Steel	7 542 83
	Dark Stainless Steel	7 542 93
4-gang plates	White Mirror	7 544 24
	Black Baroque	7 544 34
	Purple Baroque	7 544 44
	Leather	7 544 54
	Walnut	7 544 64
	Carbon	7 544 74
	Stainless Steel	7 542 84
	Dark Stainless Steel	7 542 94

2. RANGE (continued)

5-gang plates	White Mirror	7 544 25
	Black Baroque	7 544 35
	Purple Baroque	7 544 45
	Leather	7 544 55
	Walnut	7 544 65
	Carbon	7 544 75
	Stainless Steel	7 542 85
	Dark Stainless Steel	7 542 95

3. OVERALL DIMENSIONS (mm)

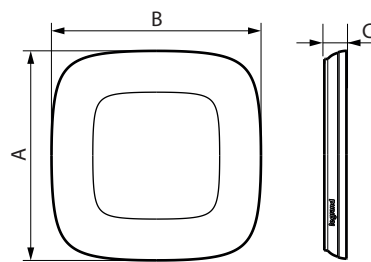

	A	B	C
1-gang	91.5	91.5	10
2-gang	163	92.5	10
3-gang	234.5	93.5	10
4-gang	305.5	94.5	10
5-gang	377	95.5	10

4. MOUNTING

The plates are clipped onto the mechanisms for compensate for the thickness (Ex.: wall carpet) 0.75 mm to + 1.5 mm (2.25 mm).
 Easy to remove with a screwdriver using the slots on the side of the plate.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

■ 5.2 Material characteristics

Plates: Plating carbon + sticker

Sub-plates: PC

Insert: degreased metal

Surround: chrome or gold

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

■ 5.2 Climatic characteristics

Storage temperature: - 10°C to + 70°C

Usage temperature: - 5°C to + 50°C

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: An initial test is required for the use of other special maintenance products.

7. SPECIAL USE

The plates must not be painted.