



Mosaic™
Socket for DLP trunking, mounting with support
German standard


Cat. No(s): 0 776 01/02/03/04/11/12/13/14/21/22/23/24



0 776 01



0 776 02

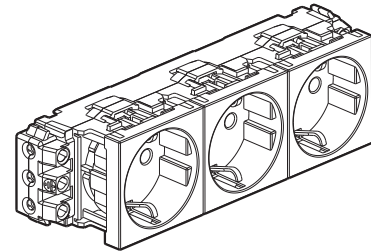

0 776 03

1. DESCRIPTION

Socket outlets with shutters, with connection at both sides, for mounting on DLP trunking in conjunction with supports.
 Install one socket by support frame.

2. RANGE

2 P+E socket outlets - 2 modules

	○ White	0 776 01
	● Red	0 776 11
	● Red tamperproof	0 776 21

2 x 2 P+E socket outlets - 4 modules

	○ White	0 776 02
	● Red	0 776 12
	● Red tamperproof	0 776 22


3 x 2 P+E socket outlets - 6 modules

	○ White	0 776 03
	● Red	0 776 13
	● Red tamperproof	0 776 23

2 x 2 P+E socket outlets - 8 modules

	○ White	0 776 04
	● Red	0 776 14
	● Red tamperproof	0 776 24

3. OVERALL DIMENSIONS (mm)

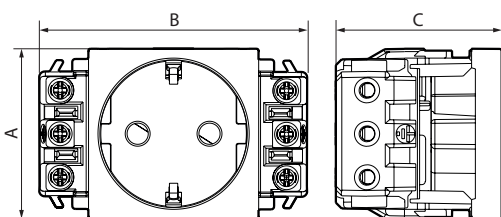

Catalogue numbers	A	B	C
0 776 01/11/21	45	71	44
0 776 02/12/22	45	116	44
0 776 03/13/23	45	161	44
0 776 04/14/24	45	206	44

4. CONNECTION

Type of terminals: with screws
 Number of terminals: 6
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 10 mm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Impact tests: IK 04
 Protection against solid bodies and liquids: IP 40

■ **5.2 Material characteristics**

Base: ABS
 Cover plate: PC
 Halogen free
 UV resistant

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place
- + 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 V~
 Current: 16 A

■ **5.4 Climatic characteristics**

Storage and use temperature: - 15° C to + 70° C

6. MAINTENANCE


Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.


Socket for DLP trunking, mounting with support German standard





7. ACCESSORIES

Tamperproof insert

	● Red Fixes directly onto the 2P+E plug of the appliance to be connected to the tamperproof socket	0 502 99
---	---	----------

Cable end fitting

	Prevents tension on the connection between the wire and socket if the cable is pulled.	0 898 07
---	--	----------

Supports		65 mm	85 mm
	2 modules	0 109 52	0 109 92
	4 modules	0 109 54	0 109 94
	6 modules	0 109 56	0 109 96
	8 modules	0 109 58	0 109 98

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.