


XL 4000 metal free-standing enclosures and cable compartments

Cat. No (s) : 20501/02/03/04/05/06/07/08/09



CONTENTS

PAGE

| | |
|----------------------------------|---|
| 1. General characteristics | 1 |
| 2. Range | 2 |
| 3. Overall dimensions | 2 |
| 4. Equipment | 3 |
| 5. Accessories | 8 |

1. GENERAL CHARACTERISTICS

Metal free-standing enclosures and cable compartments, that can be assembled and combined, constituted by combining a top-base assembly, structural supports, mounting supports, one plinth and rear and side panels, capacity: 24 modules (free-standing enclosure width 725 mm or 975 mm with internal cable compartment) to 36 modules (free-standing enclosure width 975 mm). Cable compartment width 475 mm. Colour RAL 7035

- 2 available heights : 2000, 2200

- Separation forms: up to 4b

- service level : up to SL 332

- Ingress protection against solids and liquids to standards IEC 60529 and NF EN 60529 :

IP 30 without door

IP 55 with door and sealing kit for coupling

- Mechanical impact rating to standards NF EN 50102 and NF C 20015 :

IK 07 without door

IK 08 with door

- Maximum current strength : 4000 A

- Maximum tolerated surge intensity Icw and associated peak current Icw: up to 110 kA (with busbars 4000 A)

1-1 Standard conformity

- Legrand cabinets and free-standing enclosures are designed in compliance with all the relevant international standards.

| | |
|-----------|---|
| CEI 60529 | Degree of protection provided by enclosures (IP code) |
| EN 60529 | |

| | |
|-------------|--|
| NFC 20-015 | Degree of protection provided by enclosures of electrical equipment against external mechanical impact (IK code) |
| NF EN 50102 | |

1. GENERAL CHARACTERISTICS (cont.)

Standard conformity (cont.)

| | |
|---------------|---|
| CEI 60439-1 | Low voltage switchgear and controlgear assemblies |
| NF EN 60439-1 | |

| | |
|---------------|---|
| CEI 60439-3 | Low voltage switchgear and controlgear assemblies |
| NF EN 60439-3 | |


1-1 Structure

- Assembly of steel plate elements :

- 4 vertical steel profiled mounting supports taking side and rear panels, and doors.

- one "roof-base" assembly

- one plinth.

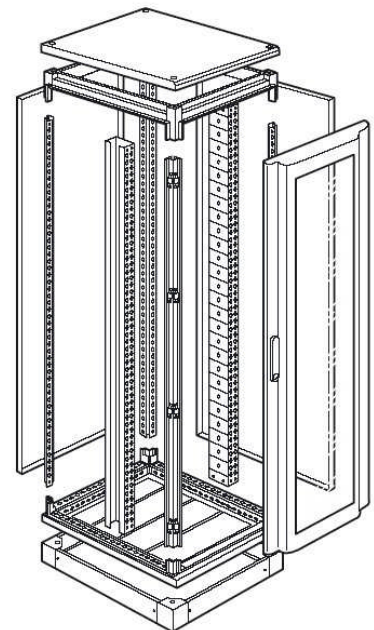

XL 4000 metal free-standing enclosures and cable compartments

Cat. No (s) : 20501/02/03/04/05/06/07/08/09

1. GENERAL CHARACTERISTICS (cont.)

1-3 Outer housing

- Removable steel rear and side panels

| Dimension | Height |
|-----------|----------|
| 475 mm | 12/10 mm |
| 725 mm | 12/10 mm |
| 975 mm | 15/10 mm |

- Combinable plinths: height 100 mm
- Reversible steel plate doors 12/10 flat or curved, solid or transparent, supplied with handle. Can be mounted on front, rear or side. Barrels (to be ordered separately).
- Faceplate in steel plate 12/10

1-4 Resistance to climatic conditions :

- Salt spray: 500 h
- Operating temperature: - 5°C to + 40°C
- Storage temperature: - 10°C to + 70°C

1-5 Fire resistance :

- Glow wire resistance 750°C to IEC 60695-2-1

1-6 Polyester coating characteristic

- Beige RAL 7035 epoxy polyester powder-coated paint coating thickness 50/70 µ.

-Chemical resistance :

- Good resistance to solvents, methyl alcohol, toluene and xylene.
- Film intact after one month's immersion at ambient temperature in the following aqueous solutions :

Standard detergent 1%
Sodium chloride 10%
Citric acid 1%
Phosphoric acid 5%

2. RANGE




2-1 Free-standing enclosures

| Height mm | Inside Height mm | Width mm | Inside Width mm | Depth mm | Roof-base Cat. No. |
|-----------|------------------|----------|-----------------|----------|--------------------|
| 2200/2000 | 2000/1800 | 725 | 600 | 475 | 20504 |
| 2200/2000 | 2000/1800 | 725 | 600 | 725 | 20505 |
| 2200/2000 | 2000/1800 | 725 | 600 | 975 | 20506 |
| 2200/2000 | 2000/1800 | 975 | 850 | 475 | 20507 |
| 2200/2000 | 2000/1800 | 975 | 850 | 725 | 20508 |
| 2200/2000 | 2000/1800 | 975 | 850 | 975 | 20509 |

2-2 Cable compartments

| Height mm | Inside Height mm | Width mm | Inside Width mm | Depth mm | Roof-base Cat. No. |
|-----------|------------------|----------|-----------------|----------|--------------------|
| 2200/2000 | 2000/1800 | 475 | 350 | 475 | 20501 |
| 2200/2000 | 2000/1800 | 475 | 350 | 725 | 20502 |
| 2200/2000 | 2000/1800 | 475 | 350 | 975 | 20503 |

3. OVERALL DIMENSIONS

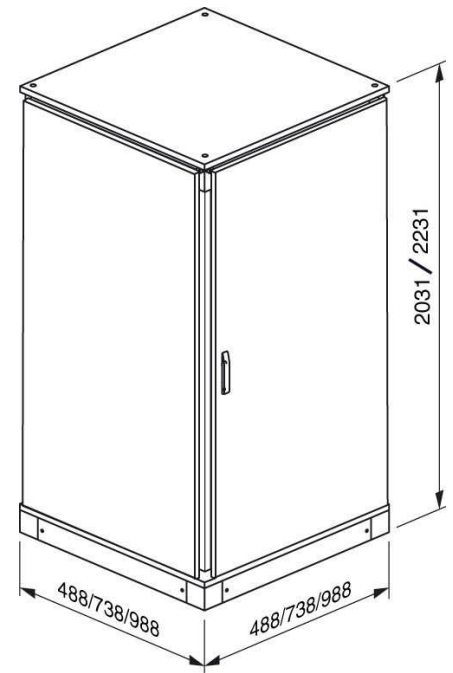


Passthrough

- Mounting supports


Steel profiled mounting supports with alternating perforations

- Perforated at 25 mm intervals for fixing clip nuts

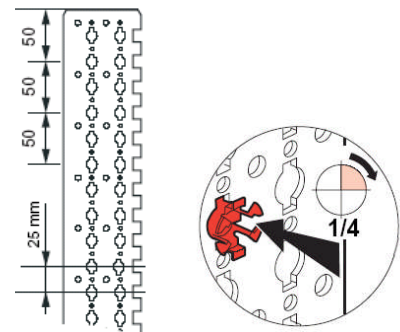


3. OVERALL DIMENSIONS (cont.)


- Perforated at 25 mm intervals for fixing mounting support rail spacers



- Grooves at 50 mm intervals for securing adjustable fixing plates

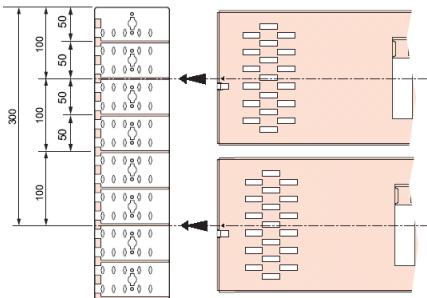

- Perforated at 25 mm intervals (diameter 4.5 mm) for fixing self-tapping screws



4. EQUIPMENT

Mounting supports

| Height | Reduced for armoire Prof. 475 mm | Enclosure without cable sleeves | Enclosure with cable sleeves |
|--------|----------------------------------|---------------------------------|------------------------------|
| 2000 | 20512 | 20513 | 20516 |
| 2200 | 20852 | 20853 | 20854 |

Support frame for faceplates

| Height | Width 725 mm or 975 mm without cable sleeves | Width 975 mm with cable sleeves |
|--------|--|---------------------------------|
| 2000 | 20558 | 20559 |
| 2200 | 20855 | 20856 |


Pivoting support frame for faceplates

| Height | Width 725 mm | Width 975 mm without cable sleeves | Width 975 mm with cable sleeves |
|--------|--------------|------------------------------------|---------------------------------|
| 2000 | 20568 | 20569 | 20579 |
| 2200 | | | |

4. EQUIPMENT (cont.)


Spacer for mounting supports

Cat. No.20750 for DPX assembly in vertical position on fixing devices or adjustable plates

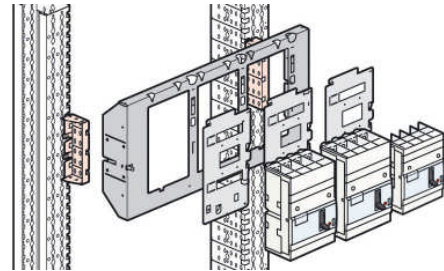

Crosspieces

Mounting on structure supports for making an internal cable compartment. The adjustable crosspieces are dedicated to the busbar supports



| Fixed | Adjustable | Length |
|-------|------------|--------|
| 20521 | 20551 | 350 |
| 20522 | 20552 | 600 |
| 20523 | 20553 | 850 |


Fixed crosspieces for partial chassis

Allow to fix the trimmed equipment mounting supports

| Fixed | Length |
|-------|--------|
| 20531 | 350 |
| 20532 | 600 |

Front for cable compartment

| Height | internal cable compartment | external cable compartment |
|--------|----------------------------|----------------------------|
| 2000 | 20547 | 20548 |
| 2200 | 20866 | 20867 |

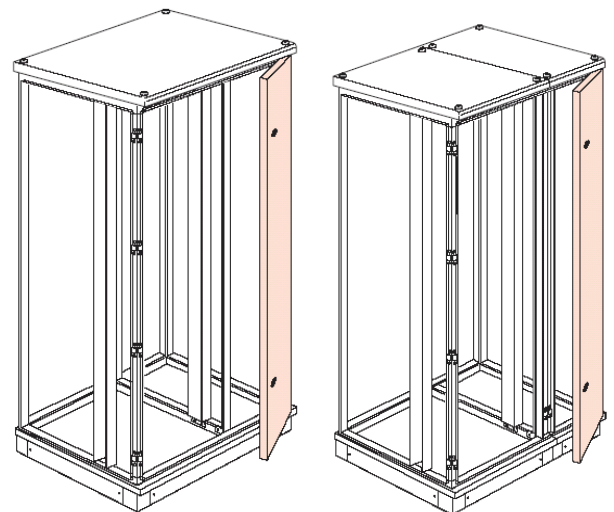


4. EQUIPMENT (cont.)

Reversible doors

Supplied with handle. Interchangeable barrel (to be ordered separately). Can be mounted on front, rear or side


| Width mm | Metal | Transp. | Flat | Curved | Cat. No. H 2000 | Cat. No. H2200 |
|----------|-------|---------|------|--------|-----------------|----------------|
| 475 | X | | X | | 20571 | 20865 |
| 725 | X | | | X | 20554 | 20861 |
| 725 | | X | | X | 20564 | 20853 |
| 725 | X | | X | | 20574 | |
| 725 | | X | X | | 20584 | |
| 975 | X | | | X | 20557 | 20862 |
| 975 | | X | | X | 20567 | 20864 |
| 975 | X | | X | | 20577 | |
| 975 | | X | X | | 20587 | |

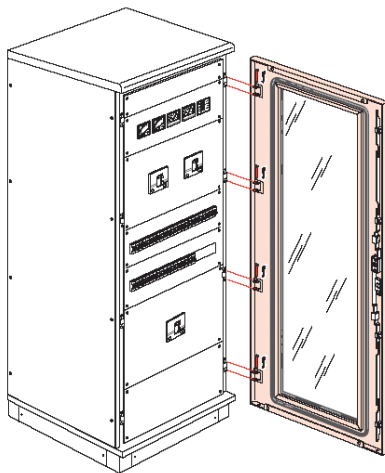

Rear and side panels

Screw mounting


| Height mm | Width 475 mm | Width 725 mm | Width 975 mm |
|-----------|--------------|--------------|--------------|
| 2000 | 20541 | 20542 | 20543 |
| 2200 | 20857 | 20858 | 20859 |

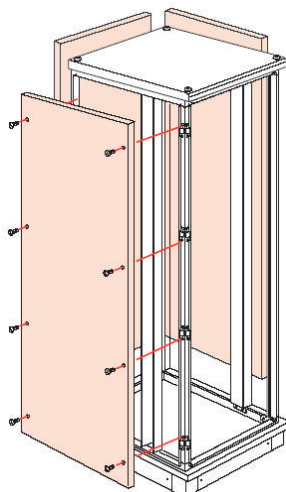

4. EQUIPMENT (cont.)

Outer housing IP 30 / IP 55

| Height mm | IP 30 | | | IP 55 |
|-----------|--------------|--------------|--------------|-------|
| | Width 475 mm | Width 725 mm | Width 975 mm | |
| 2000 | 20561 | 20562 | 20563 | 20565 |
| 2200 | 20831 | 20832 | 20833 | 20847 |

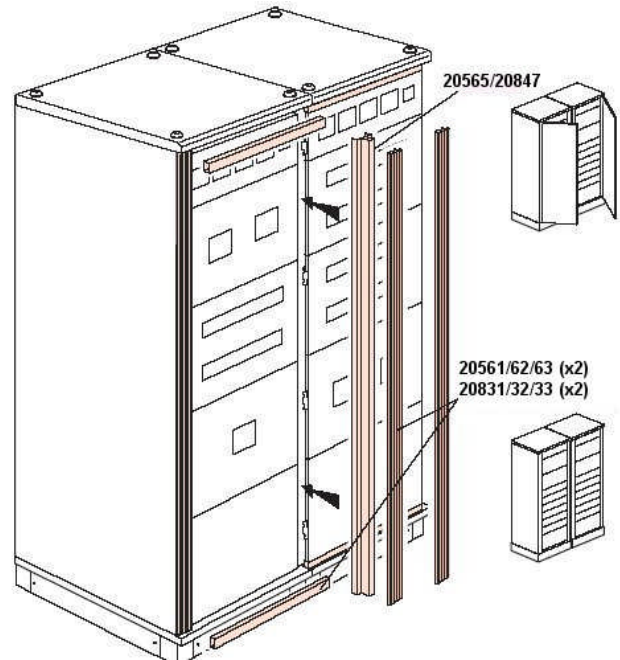

Combinable plinths (height 100 mm)

Cat. No. 20511 475 x 475


Cat. No. 20514 725 x 475

Cat. No. 20515 725 x 725

Cat. No. 20517 975 x 475

Cat. No. 20518 975 x 725

Cat. No. 20519 975 x 975

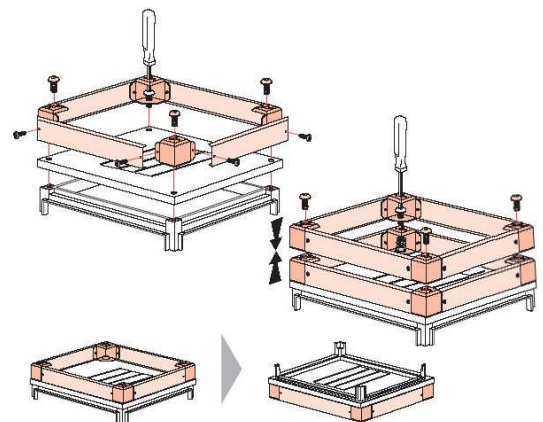

4. EQUIPMENT (cont.)

4.1 Faceplates

Sealable -turn faceplates, and faceplates with captive screws

Screw faceplates can include hinges Cat. No. 20959

- Plain metal faceplates

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|------------------------|------------------------|----------------|
| 20840 | 20940 | 20990 | 50 |
| 20841 | 20941 | 20991 | 100 |
| 20842 | 20942 | 20992 | 150 |
| 20843 | 20943 | 20993 | 200 |
| 20844 | 20944 | 20994 | 300 |
| 20845 | 20945 | 20995 | 400 |
| 20846 | 20946 | 20996 | 600 |

- Faceplate panels for rail-mounted devices, Lexic, Vistop up to 160A, DPX 125, DPX 160, DPX 250 ER and DPX-IS 250

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|---------------------|------------------------|----------------|
| 20800 | 20900 | 20950 | 150 |
| 20801 | 20901 | 20951 | 200 |
| 20810 | 20910 | 20960 | 300 |

- For devices on fixing plate in vertical position DPX-IS 250, DPX-IS 630 and DPX-IS 1600

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|---------------------|---------------------|----------------|
| 20810 | 20910 | 20960 | 300 |
| 20806 | 20906 | 20960 | 300 |
| 20807 | 20907 | 20957 | 300 |
| | 20908 | | 400 |

- For devices on fixing plate in vertical position DPX 125, 160 and 250 ER

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|---------------------|---------------------|----------------|
| 20810 | 20910 | 20960 | 300 |
| 20812 | 20912 | 20962 | 400 |

- For devices on fixing plate in horizontal position DPX 125, 160 and 250 ER

| -turn 24 modules | Screw 24 modules | Height (mm) |
|---------------------|---------------------|----------------|
| 20811 | | 300 |
| 20814 | 20914 | 200 |
| 20815 | 20915 | 200 |
| 20816 | 20916 | 200 |

4. EQUIPMENT (cont.)

- For devices on fixing plate in vertical position DPX 250, 630 and 1600 fixed version, front terminal

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|---------------------|---------------------|----------------|
| 20820 | 20920 | 20970 | 400 |
| 20822 | 20922 | 20972 | 600 |
| 20830 | 20930 | 20980 | 400 |
| | 20932 | | 400 |

- For devices on fixing plate in horizontal position DPX 250, 630 and 1600 fixed version, front terminal

| -turn 24 modules | Screw 24 modules | Screw 36 modules | Height (mm) |
|---------------------|---------------------|---------------------|----------------|
| 20824 | 20924 | | 200 |
| 20823 | 20923 | | 300 |
| 20834 | 20934 | 20984 | 400 |
| | 20935 | | 400 |
| | 20936 | | 400 |

- For devices on fixing plate in vertical position DPX 125, DPX 160 and DPX 250 ER

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21210 | 300 |
| 21212 | 400 |

- For plug-in devices on fixing plate in horizontal position DPX 125, DPX 160 and DPX 250 ER

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21214 | 200 |
| 21216 | 200 |
| 21217 | 200 |

- For plug-in devices in vertical position DPX 250 and DPX 630

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21220 | 400 |
| 21222 | 400 |

- For plug-in devices in horizontal position DPX 250 and DPX 630

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21224 | 300 |
| 21217 | 300 |

- For draw-out devices in vertical position DPX 250 and DPX 630

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21221 | 400 |
| 21202 | 400 |
| 21204 | 400 |
| 21223 | 400 |
| 21203 | 400 |
| 21226 | 300 |
| 21227 | 300 |
| 21218 | 300 |
| 21219 | 300 |

4. EQUIPMENT (cont.)

- For supply inverters DPX 250 and DPX 630

| Faceplates with captive screws | Height (mm) |
|---------------------------------|-------------|
| 20974 | 400 |
| 20976 | 400 |
| Faceplates with hinges and lock | |
| 21290 | 400 |
| 21291 | 400 |
| 21294 | 300 |
| 21295 | 300 |

- For draw-out devices in vertical position DPX 1600

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21231 | 600 |
| 21232 | 600 |

- For draw-out devices in horizontal position DPX 1600

| Faceplates with hinges and lock | Height (mm) |
|---------------------------------|-------------|
| 21234 | 400 |
| 21235 | 400 |

- For supply inverters DPX 1600

| Faceplates with captive screws for DPX fixed version | Height (mm) |
|--|-------------|
| 20986 | 800 |
| 20987 | 800 |
| Faceplates with hinges and lock for DPX draw-out version | |
| 21236 | 800 |
| 21237 | 800 |

- For DMX³ 2500 and 4000

| Faceplates with hinges and lock for DMX ³ fixed version | Height (mm) |
|---|-------------|
| 20938 | 600 |
| 20939 | 600 |
| Faceplates with hinges and lock for DMX ³ draw-out version | |
| 20939 | 600 |
| 20949 | 600 |

- Perforated faceplates for easier natural ventilation

| 24 modules | 36 modules | Height (mm) |
|------------|------------|-------------|
| 20949 | 20999 | 200 |

4. EQUIPMENT (cont.)

4.2 Plates

Fixing plates on rail

- Cat. No. 26208 For DPX 125
- Cat. No. 26259 For DPX 160 and DPX 250 ER
- Cat. No. 26239 For DPX-IS 250

Fixing plates

- Cat. No. 20605 24 modules for 1 or 2 DPX-IS 250
- Cat. No. 20655 36 modules for 1 or 2 DPX-IS 250
- Cat. No. 20607 24 modules for 1 or 2 DPX-IS 630
- Cat. No. 20657 36 modules for 1 or 2 DPX-IS 630
- Cat. No. 20609 24 modules for 1 Vistop 800

Fixing plates for fixed-version devices, with front terminal

- Device in vertical position

- Cat. No. 20610 24 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER
- Cat. No. 20660 36 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER
- Cat. No. 20612 24 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER with downstream RCD
- Cat. No. 20662 36 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER with downstream RCD
- Cat. No. 20620 24 modules for 1 to 3 DPX 250 or DPX 630
- Cat. No. 20670 36 modules for 1 to 3 DPX 250 or DPX 630
- Cat. No. 20622 24 modules for 1 to 3 DPX 250 or DPX 630 with RCD
- Cat. No. 20672 36 modules for 1 to 3 DPX 250 or DPX 630 with RCD
- Cat. No. 20630 24 modules for 1 DPX 1600
- Cat. No. 20680 36 modules for 1 DPX 1600

- Device in horizontal position

- Cat. No. 20614 24 modules for 1 DPX 125 or DPX 160 with or without downstream RCD
- Cat. No. 20616 24 modules for 1 DPX 250 ER with or without downstream RCD
- Cat. No. 20624 24 modules for 1 DPX 250 with or without RCD
- Cat. No. 20623 24 modules for 1 DPX 630 with or without RCD
- Cat. No. 20630 24 modules for 1 DPX 1600
- Cat. No. 20680 36 modules for 1 DPX 1600

Fixture for fixed-version devices, with front or rear terminal

- Device in vertical position

- Adjustable fixtures
- Cat. No. 20710 24 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER
- Cat. No. 20712 24 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER with downstream RCD
- Cat. No. 20760 36 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER
- Cat. No. 20762 36 modules for 1 to 3 DPX 125, DPX 160 or DPX 250 ER with downstream RCD

4. EQUIPMENT (cont.)

Fixture for fixed-version devices, with front or rear terminal

- Device in vertical position

- Mounting plates
- Cat. No. 20745 for DPX 125
- Cat. No. 20746 for DPX 125 with downstream RCD
- Cat. No. 20755 for DPX 160
- Cat. No. 20756 for DPX 160 with downstream RCD
- Cat. No. 20765 for DPX 250 ER
- Cat. No. 20766 for DPX 250 ER with downstream RCD

- Device in horizontal position

- Adjustable plates 24 modules
- Cat. No. 20714 for 1 DPX 125 with or without downstream RCD
- Cat. No. 20715 for 1 DPX 160 with or without downstream RCD
- Cat. No. 20716 for 1 DPX 250 ER with or without downstream RCD

Fixture for plug-in version devices, with front or rear terminal

- Devices in vertical position

- Adjustable fixtures
- Cat. No. 20711 for 1 to 3 DPX 125, DPX 160 or DPX 250 ER
- Cat. No. 20713 for 1 to 3 DPX 125, DPX 160 or DPX 250 ER with downstream RCD
- Mounting plates
- Cat. No. 20747 for DPX 125
- Cat. No. 20748 for DPX 125 with downstream RCD
- Cat. No. 20757 for DPX 160
- Cat. No. 20758 for DPX 160 with downstream RCD
- Cat. No. 20767 for DPX 250 ER
- Cat. No. 20768 for DPX 250 ER with downstream RCD

- Device in horizontal position

- Adjustable plates 24 modules
- Cat. No. 20717 for 1 DPX 125 with or without downstream RCD
- Cat. No. 20718 for 1 DPX 160 with or without downstream RCD
- Cat. No. 20719 for 1 DPX 250 ER with or without downstream RCD

Fixture for supply inverter version devices

- Fixing plate for fixed, manually operated with front or rear terminal

- Cat. No. 20664 for 2 DPX 160
- Cat. No. 20666 for 2 DPX 250 ER

- Fixing plate for fixed motorized device or plug-in, manually operated or motorized device

- Cat. No. 20665 for DPX 160
- Cat. No. 20667 for 2 DPX 250 ER

Fixture for fixed-version devices, with front or rear terminal

- Device in vertical position

- Adjustable fixtures
- Cat. No. 20720 24 modules for 1 to 3 DPX 250, DPX 630
- Cat. No. 20722 24 modules for 1 to 3 DPX 250, DPX 630 with RCD
- Cat. No. 20770 36 modules for 1 to 3 DPX 250, DPX 630
- Cat. No. 20772 36 modules for 1 to 3 DPX 250, DPX 630 with RCD
- Assembly plates
- Cat. No. 20775 for DPX 250
- Cat. No. 20776 for DPX 250 with RCD
- Cat. No. 20785 for DPX 630
- Cat. No. 20786 for DPX 630 with RCD

4. EQUIPMENT (cont.)

- Device in horizontal position

- Adjustable plates 24 modules
- Cat. No. 20724 for 1 DPX 250 with or without RCD
- Cat. No. 20793 for 1 DPX 630 with or without RCD

Fixture for devices, with front or rear terminal

- Device in vertical position

- Adjustable fixtures
- Cat. No. 20721 for 1DPX 250 or 1 DPX 630
- Cat. No. 20723 for 1DPX 250 or DPX 630 with RCD
- Mounting plates
- Cat. No. 20777 for DPX 250
- Cat. No. 20778 for DPX 250 with RCD
- Cat. No. 20787 for DPX 630
- Cat. No. 20788 for DPX 630 with RCD

- Device in horizontal position

- Adjustable plates
- Cat. No. 20726 for draw-out DPX 250 with or without RCD
- Cat. No. 20727 for plug-in DPX 250 with or without RCD
- Cat. No. 20798 for draw-out DPX 250 and DPX 630 with or without RCD

Fixture for supply inverter version devices

- Device in vertical position

- Cat. No. 20674 for 2 DPX 250
- Cat. No. 20676 for 2 DPX 630

Fixture for fixed-version devices, with front or rear terminal

- Device in vertical position

- Adjustable plates
- Cat. No. 20730 24 modules for 1DPX 1600 with front terminals
- Cat. No. 20732 24 modules for 1DPX 1600 with rear terminals
- Cat. No. 20782 36 modules for 1DPX 1600 with rear terminals

- Device in horizontal position

- Adjustable plates
- Cat. No. 20734 24 modules for 1DPX 1600 with front terminals
- Cat. No. 20736 24 modules for 1DPX 1600 with rear terminals

Fixture for fixed draw-out version devices, with front or rear terminal

-Device in vertical position

- Adjustable plates
- Cat. No. 20731 for 1 DPX 1600

- Device in horizontal position

- Adjustable plates
- Cat. No. 20735 for 1 DPX 1600

Fixtures for supply inverter version devices

- Device in horizontal position

- Cat. No. 20686 for 2 DPX 1600 fixed
- Cat. No. 20687 for 2 DPX 1600 draw-out

4. EQUIPMENT (cont.)

Universal fixing plates

- Perforated plain fixing plates width 600 mm

- Cat. No. 20641 Height 200 mm
- Cat. No. 20642 Height 400 mm

- Plain fixing plates width 600 mm

- Cat. No. 20643 Height 200 mm
- Cat. No. 20644 Height 400 mm
- Cat. No. 20645 Height 600 mm

- Plain fixing plates width 850 mm

- Cat. No. 20646 Height 400 mm

- Adjustable plain fixing plates

- Cat. No. 20647 Height 200 mm Width 600 mm
- Cat. No. 20648 Height 400 mm Width 600 mm
- Cat. No. 20649 Height 200 mm Width 850 mm

5. ACCESSORIES

- Coupling

- Cat. No. 20586 Screws for structure coupling
- Cat. No. 20588 Set of 2 L-shaped plates
- Cat. No. 20589 Set of 2 flat plates
- Cat. No. 20585 IP 55 sealing kit
- Cat. No. 20510 Kit for plinth coupling

- Lifting rings

- Cat. No. 20582 Set of 4 rings

- Natural ventilation

- Cat. No. 20544 ventilation panel for plinth width 725
- Cat. No. 20545 ventilation panel for plinth width 975
- Cat. No. 20546 spacer for raising top

- Lighting

- Cat. No. 20989 lighting kit

- Universal rails

Fixed on the mounting supports

- Cat. No. 20504 width 600 mm 24 modules
- Cat. No. 20554 width 850 mm 36 modules

- Adjustable, universal mounting devices

Fix onto mounting supports

- Cat. No. 20602 for free-standing enclosures, 24 modules
- Cat. No. 20652 for free-standing enclosures, 36 modules

- Wire guide

- Mounting support for Lina 25™ cable ducting

Allows horizontal and vertical mounting and height adjustment, fixes onto mounting supports

- Cat. No. 20470 set of 2 for free-standing enclosures, 36 modules
- Cat. No. 20570 set of 2 for free-standing enclosures, 24 modules

- Lina 25™ cable ducting

- Cat. No. 36207 40 mm x 60 mm Length 2 m
- Cat. No. 36208 40 mm x 80 mm Length 2 m
- Cat. No. 36212 60 mm x 60 mm Length 2 m
- Cat. No. 36213 60 mm x 80 mm Length 2 m
- Cat. No. 36646 insulating rivet

5. ACCESSORIES (cont.)

- Wire guides

- Wire mounting support
- Cat. No. 20435 for free-standing enclosures, 24 modules
- Cat. No. 20436 for free-standing enclosures, 36 modules

- Universal support for cable compartments

Allows mounting terminal strips, earth terminals, etc.

- Cat. No. 20195 set of 3 metal supports

- Clip nuts

- turn front mount on mounting supports
- Cat. No. 20092 bag of 20 clip nuts for M6 screws
- Cat. No. 20091 bag of 50 M6 screws

- Hinges

Fix onto screw faceplates

- Cat. No. 20959 set of 2 hinges

- Blank

For metal or insulated faceplates

- Cat. No. 20051 Cutaway 24-module blanking plate
- Cat. No. 01665 18 modules, separation possible by module or module

- Clip-on adhesive label holder

Cat. No. 20399 supplied with label plate for marking rows on faceplates

- Vertical separation kit

- Cat. No. 20533 for free-standing enclosure, depth 475 mm
- Cat. No. 20534 for free-standing enclosure, depth 725 mm

- Horizontal separation kit

- Cat. No. 20536 for free-standing enclosure, depth 725 mm
- Cat. No. 20537 for free-standing enclosure, depth 975 mm

- Supports

Cat. No. 20520 Intermediate structural support

- Mounting supports with pivoting faceplate supports

- Cat. No. 20525 for free-standing enclosure without internal cable compartment
- Cat. No. 20526 for free-standing enclosure with internal cable compartment

- Plain plate

Supplied with sliding rail for depth adjustment

- Cat. No. 20540 height 1800 mm width 600 mm

Door accessories





- Key barrels and knockout for metal or transparent doors, with 2 keys

- Cat. No. 20291 Type 405
- Cat. No. 20292 Type 455
- Cat. No. 20293 Type 1242E
- Cat. No. 20294 Type 2433A
- Cat. No. 20296 Double bar knockout
- Adhesive transparent document holder
- Cat. No. 09799 Flexible plastic A4
- Cat. No. 36582 Rigid plastic IP 50





5. ACCESSORIES (cont.)

- DMX³ fixture

- Device for DMX³ fixed version

| DMX ³ | Nbre de pôles | 24 Modules Ref. 20751 | | 36 Modules Ref. 20752 | |
|---|---------------|---|---|---|---|
| | |  |  |  |  |
| 2500 N/H 2500 L 4000 N/H/L | 3P | OK | OK | OK | OK |
| 2500 N/H | 4P | OK | OK | OK | OK |
| 2500 L, 4000 N/H/L | 4P | OK | | OK | OK |

- Device for DMX draw-out version

| DMX ³ | Nbre de pôles | 24 Modules Ref. 20753 | | 36 Modules Ref. 20754 | |
|----------------------------|---------------|---|---|---|---|
| | |  |  |  |  |
| 2500 N/H | 3P | OK | OK | OK | OK |
| 2500 L 4000 N/H/L | 3P | OK | | OK | OK |
| 4000 N/H | 4P | OK | OK | OK | OK |
| 2500 L 4000 N/H/L | 4P | OK | | OK | OK |

5. ACCESSORIES (cont.)

Connection for protective conductors

- Cat. No. 04819 Flat bar 12 x 2 for IP2x terminal blocks
- Cat. No. 37301 Holed bar
- Cat. No. 37302 Stirrup bar
- Cat. No. 37349 Copper bar 12 x 4
- Cat. No. 37389 Copper bar 12 x 4 with M 5 tapped holes
- Cat. No. 39399 Support for bars Cat. No(s) 37301/02/89 and bar Cat. No. 04819
- Cat. No. 37360 Connector for conductor 1.5 mm
- Cat. No. 37361 Connector for conductor 6 to 16 mm
- Cat. No. 37362 Connector for conductor 10 to 35 mm
- Cat. No. 37365 Connector for bar 12 x 4 with tapped holes
- Cat. No. 37385 Equipotential conductor cable 6 mm

- Paint

- Cat. No. 20098 Paint spray RAL 7035