



Arteor™ Single TV star sockets

Cat. No(s): 5 721 63/71 - 5 726 63/71
 5 700 50/51 - 5 710 50/51



5 721 63



5 721 71


1. USE

For DVBT installation.
 UHD TV compatible.
 Class A shielded star sockets LTE Ready (4G protected).
 Recommended coaxial cable 17/19 VATC.
 Can be flush mounted in a box min. 40 mm deep.
 To be equipped with plate.

2. RANGE


Description	White	Magnesium	Champagne	Soft Alu
Single F type female TV socket screw-in connector - 1 module	5 721 63	5 726 63	5 700 50	5 710 50
Single male TV socket Ø 9.52 mm 1 module	5 721 71	7 526 71	5 700 51	5 710 51

3. DIMENSIONS (mm)


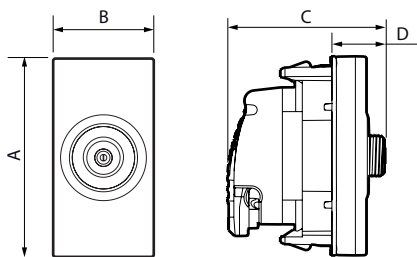


Cat. Nos	A	B	C	D
5 721 63 - 5 726 63 - 5 700 50 - 5 710 50	45	45	35.5	12
5 721 71 - 5 726 71 - 5 700 51 - 5 710 51	45	22.5	32.5	9

4. CONNECTION

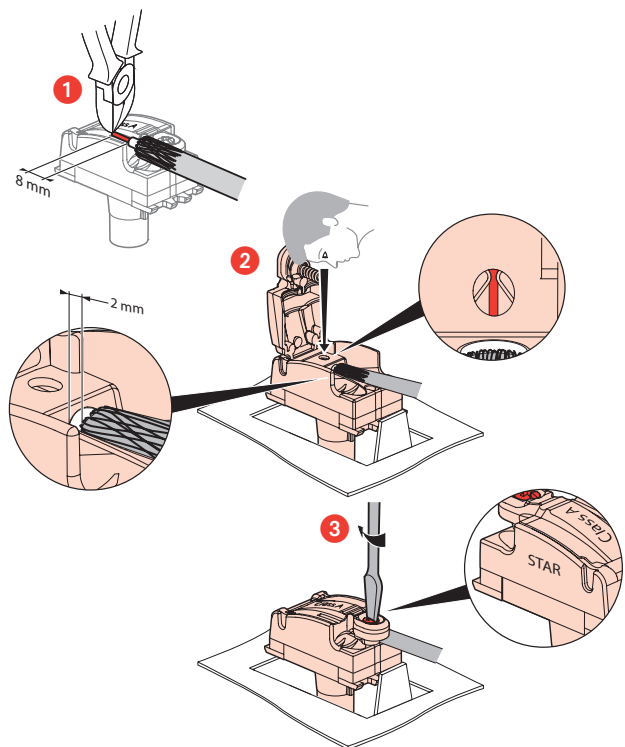

5. WIRING PRECAUTIONS

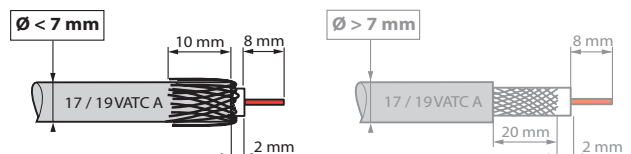

By restricting deformation of the coaxial cable, the rear connection avoids impedance discontinuity, thereby sustaining performance.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against impacts: IK 03
Protection against solid/bodies and liquids: IP 21
Cable resistance: 120 N

■ 6.2 Material characteristics

Cover plate: ABS
White RAL 9003
Painted Magnesium - Soft Alu - Champagne

Halogen-free
UV-resistant

Motor: Box: Zamac
Cover: Zamac
Pin: Bronze
Screws: Steel

Self-extinguishing:
850°C/30 s for insulating parts holding live parts in place.
650°C/30 s for other parts made of insulating materials.

■ 6.3 Electrical characteristics

Characteristic impedance: 75 ohm
Class A shielding efficiency (class A shielding is necessary to prevent interference caused by using new 3 and 4 G phone signals, as these unwanted signals can result in pixellation on screen or adversely affect the sound track).

Frequency bands: TV/SAT - 0-2400 MHz
Attenuation: 1dB maximum

■ 6.4 Climate characteristics

Storage temperature: -10°C to +70°C
Usage temperature: -5°C to +35°C

7. CLEANING

Surface cleaning with a cloth.
Do not use acetone, tar remover, trichloroethylene.

Resistant to the following products: Hexane (NF C 61-314), Methylated spirit, soapy water, diluted ammonia, bleach diluted to 10 %, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See to e-catalogue.

9. PERFORMANCES

