




Pliable protected conduit system range FKMF Superspeed, with an internal layer for a high cable sliding speed (for diameters 20, 25, 32 mm). It is made in self-extinguishing PP: classification 33232, available in seven diameter from 16 to 63 mm. Suitable for electrical system and/or data trasmission for installation: mainly flush-mounted in floors, walls and ceilings buried in concrete.

Culoare	Gri	Material	PP cu autostingere
Tip	fără sondă de tras cablul	Tuburi Ø (mm)	40
Rezistență la comprimare	3 (Mediu - 750 N)	Rezistență la impact	3 (Mediu - 2 J)
Interval temperatură inferior	2 (-5 °C)	Interval temperatură superior	3 (+105 °C)
Rezistență la îndoire	2 (Pliabil)	Caracteristici electrice	2 (Cu caracteristici de izolație electrică)
Protecție la pătrunderea apei	0	Rezistență la coroziune	Nu se aplică la sistemele cu tuburi din plastic
Rezistență la incendii	1 (Fără propagare de flăcări)	Rezistență izolației	100 MO la 500V pentru 1 minut
Rigiditate dielectrică	2000 V la 50 Hz pentru 15 minute	Protecție la pătrunderea de obiecte solide cu cuplaj GF	4
Rază de curbură minimă (mm)	170	Standard	EN 61386-1 (VDE 0605-1); EN 61386-22 (VDE 0605-22)



### DIMENSIONAL

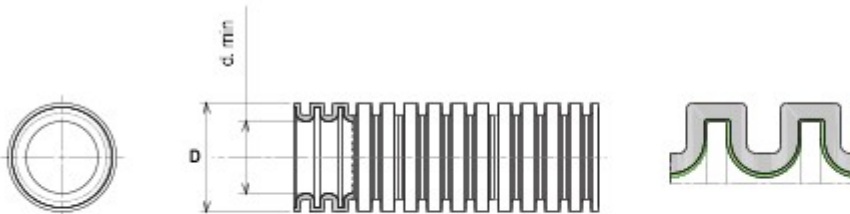

	D	d	d.min.
DX24216N	16	0 -0.3	11.7
DX24220N	20	0 -0.3	14.1
DX24225N	25	0 -0.4	18.3
DX24232N	32	0 -0.4	24.3
DX24240N	40	0 -0.4	31.2
DX24250N	50	0 -0.5	39.6
DX24263N	63	0 -0.5	50.6

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

