


# Arteor™ USB power supply - 1.5 A

Cat. no(s): 5 700 75 - 5 710 75 - 5 720 71 - 5 725 71




## 1. USE

For recharging portable devices such as phones, smartphones, MP3 or MP4, loudspeakers, watches, game consoles, powerbanks.

## 2. RANGE


Designation	Soft Alu	Champagne	White	Magnesium
Single USB socket - 5 V $\overline{=}$ - 1.5 A	5 700 75	5 710 75	5 720 71	5 725 71

## 3. OVERALL DIMENSIONS

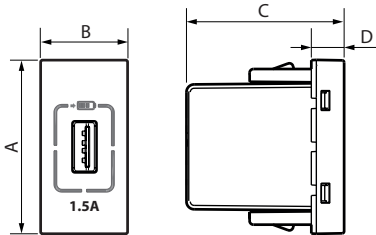

## 4. CONNECTION

Circuit breaker: 16 A max.



Type of terminals: with screws  
 Terminal capacity: 2 x 2.5 mm<sup>2</sup>  
 Stripping length: 6 mm  
 Screwdriver: flat 3.5 mm

**Recommended use:** circuit terminal outlet

## 5. TECHNICAL CHARACTERISTICS

### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
 Penetration by solid bodies/liquid: IP 40

### ■ 5.2 Material characteristics

Base: PC V-0 class painted  
 Cover: PC painted  
 Self-extinguishing:  
 850°C/30 s for insulating parts holding live parts in place.  
 650°C/30 s for other parts made of insulating materials.

## 5. TECHNICAL CHARACTERISTICS (continued)

### ■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal output voltage	5.0 V $\overline{=}$
Nominal input current	0.25 A
Nominal output current	1.5 A
Output power	7.5 W
Average efficiency in active mode	78.7 %
Stand-by power consumption	< 0.07 W
Efficiency can meet energy star level "VI" ( $\geq$ 66% measured at USB socket output side)	
Protection class	II - Low voltage

### ■ 5.4 Average charging time for a smartphone:

- 80 % charged < 1 h 15
- 100 % charged < 2 h 00

### ■ 5.5 Climatic characteristics

Storage temperature: -20°C to +70°C  
 Operating temperature: +5°C to +45°C

## 6. CLEANING

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

**Caution:** Always test before using other special cleaning products

## 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.  
 See e.catalogue