
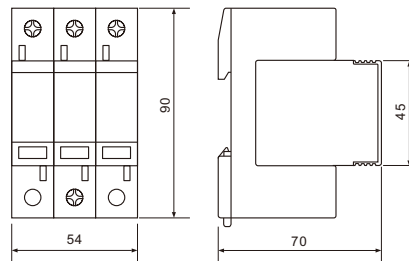


Type	ESPD2-DC40-600	ESPD2-DC40-1000
SPD classification according to EN 50539-11	Type 2	Type 2
SPD classification according to IEC 50539-11	Class II	Class II
Norminal operating voltage $W_{\text{N}} \text{] } \varphi$	$\hat{I} \text{ €€€XDC}$	$F \text{ €€€XDC}$
Max. continuous operating voltage $W_{\text{M}} \text{] } \varphi$	$\hat{i} \text{ €€€XDC}$	$F \text{ €€€XDC}$
Nominal discharge current(8/20 μ s)	I_n	20kA
Max. discharge current (8/20 μ s)	I_{max}	40kA
Voltage protection level (max.) [(DC+/DC-)->PE] U_p	$\leq 3.0\text{kV}$	$\leq 4.0\text{kV}$
Response time t_a	$\leq 100\text{ns}$	
Operating temperature range T_u	$-40^\circ\text{C}-80^\circ\text{C}$	
Operating state/fault indication	green/red	
Cross-section area (Min.)	4mm^2	
Cross-section area (Max.)	35mm^2	
For mounting on	35mm DIN rail	
Enclosure material	UL94-V0	
Degree of protection	IP20	



Made in P.R.C.

www.traconelectric.com

HU Más nyelvek elérhetőek a weboldalunkon.
 DE Weitere Sprachen finden Sie auf unserer Website.
 SK Ostatné jazyky sú k dispozícii na našej webovej stránke.
 RO Alte limbi sunt disponibile pe site-ul nostru.
 PL Inne języki są dostępne na naszej stronie internetowej.
 SI Drugi jeziki so na voljo na naši spletni strani.

RS Ostali jezici su dostupni na našoj web stranici.
 CZ Další jazyky jsou k dispozici na našich webových stránkách.
 HR Ostali jezici dostupni su na našoj web stranici.
 IT Altre lingue sono disponibili sul nostro sito web.
 FR D'autres langues sont disponibles sur notre site Internet.
 ES Otros idiomas están disponibles en nuestro sitio web.


 Tracon Budapest Kft
 H-2120 Dunakeszi, Pallag u. 23.