## Ceiling Light Installation Manual

Thank you for buying our top-quality ceiling light. Only a qualified electrician can install the ceiling light. Please read all instrction terms before installation and follow the terms strictly.

Note: Please install as the installation manual shows to avoid fire electric shock and accidents.

## Notes

- For only indoor use instead of outdoor and vibrating place etc to avoid fire, electric shock and accidents;
- No self-modification or parts changing or it would lower the lifespan or cause safety issues;
- If accident occurs, please cut off the power supply and have qualified electrician check and repair the products;
- Don't install it above the stove,gas oven and exhaust funnel to avoid accidents;
- No usage of dimmer switch unless there is a mark on it;
- If it can't light up,please check the wiring;
- No installation on the following places:



or bathroom

Unstable Ceiling









Main structure and Application

- 1. Adopt newly-imported PMMA material and LED source with high brightness. More tender light and eco-friendly:
- 2. Side-emitting light way make well-distributed light;
- 3. Fashionable and simple design conforms to modern life;
- 4. Unibody heat emission structure contributes to low light failure and long lifespan;
- 5. Surface mounted, easy for installation and maintainance;
- 6. Built-in microwave sensing function, more intelligent, allowing it to automatically light up when it senses people and light off or drop to 20% brightness when people leave, more convenient and energy-saving.
- 7.Be widely used in place with Hotels, Meeting rooms, Factories and offices, Commercial lighting, Residential and public facilities.

## **Product Parameters**

No.	Product No.	Product Size	Input Voltage	Rated Power	Working Temperature	LEDLight Angle	Lifespan	IP Rate
1	GLX-AA01-X/3	Ф 260*96	- 220~240V	13W	-20~40℃	120°	30,000h	lp20
2	GLX-AA02-X/1/3	Ф326*98		19W				
3	GLX-AA03-X/1/3	Ф395*113		26W				
4	GLX-BA04-X/3	Ф289*94		13W				lp44
5	GLX-BA05-X/1/3	Ф350*99		19W				
6	GLX-BA06-X/1/3	Ф419*114		26W				

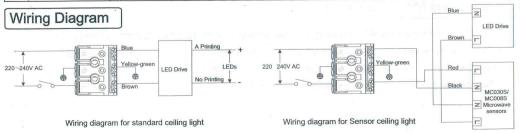



Wiring diagram for Integrated sensor ceiling light

## Installation Method

Notes: In order to ensure the lamp and people's safety. Please confirm to the following guidance strictly.

- 1. IP20 ceiling light can be used in place with Low humidity; IP44 ceiling light can be used in place with high humidity.
  - Warning: In any cases, the lamp can not be covered by any insulating materials.
- 2. Please check carefully the whole lighting, including the accerssory( 3 pieces of screws and 3 pieces of plastic screws) before installation. If they are completed, please install the lighting according to the installation steps as below:



