


**DALI channel 1 / channel 2 (offset)**


**Offset**

The light level of channel 2 is less than the light level of channel 1. The difference can be set with the parameter „Offset Value“ via basicDIM ILD Programmer or DSI-SMART Programmer.

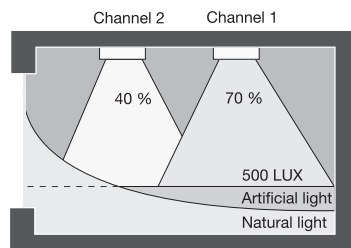


**Default Parameter Motion Detector**

Parameter	
A	light-level
1	time delay
B	sec. level
2	if vacant

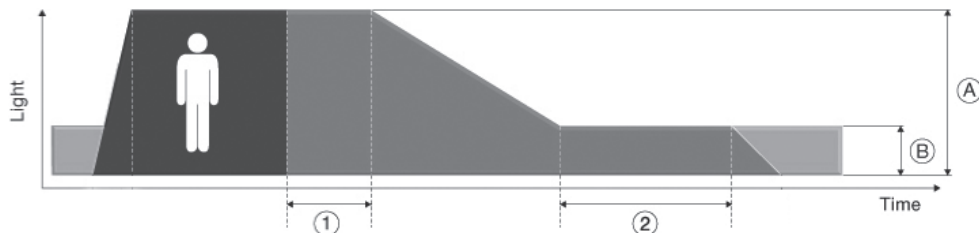

www.eglo.com

67663  
67664  
67665  
67666

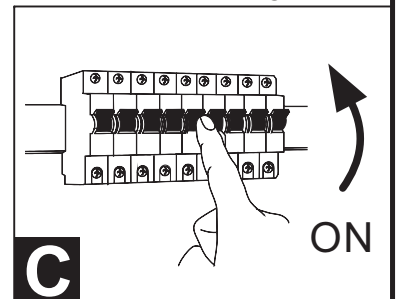

Additional technical information of sensor at [www.tridonic.com](http://www.tridonic.com) → Technical Data “basicDIM ILD 5DPI 14f”