


6180 6550	<b>DATA SHEET</b>	
Valid from: 25.04.2018	<b>SILVYN® SINUS PA6</b>	

The SILVYN® SINUS PA6 is a parallel corrugated protection conduit with a sinusoidal slit for the subsequent assembling on installed cable and wire.



**Material:** Polyamide 6

**Technical features:**

Profile Parallel corrugated with sinusoidal slit  
 Nominal size NW 7,5 up to NW 23  
 Temperature range -40°C up to +140°C


**Additional features:**

Fire classification HB acc. to UL94  
 Free of halogen und cadmium  
 UV-Resistant

**Color:** Black

**Suitable glands:** SILVYN® SPLIT GMP-M  
 SILVYN® SPLIT COS  
 SILVYN® FCL

**Product drawing:**

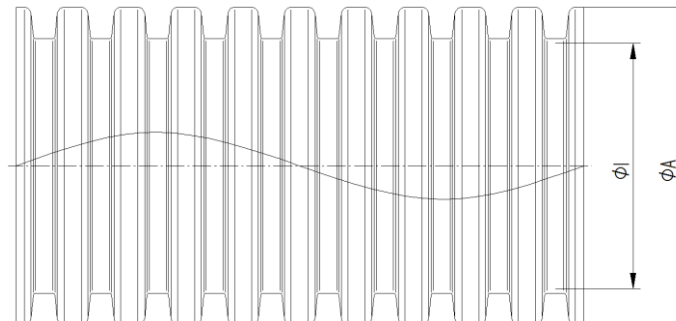

**Dimension table:**

Part No.	NW	Diameter mm		Max. Bending radius mm	Weight g/m
		ØI	ØA		
6180 6550	7,5	6,7	10,0	21	22
6180 6555	8,5	8,4	11,4	24	25
6180 6560	10	9,9	13,0	26	28
6180 6565	12	12,2	15,7	38	38
6180 6570	17	16,6	21,2	52	58
6180 6575	22	21,3	25,4	57	70
6180 6580	23	23,2	28,3	60	90

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB61806550EN Version: 03	Page 1 of 1
--	---------------------------------------	-------------