


54020100	DATA SHEET	
Valid from: 03.07.2018	SKINDICHT® MA-M/NPT	

The SKINDICHT® MA-M/NPT is a nickel-plated brass reduction ring with a metric outer thread and inner NPT thread. It will be used if metric threaded holes are already present on the machines or equipment housing but the available cable gland has a NPT thread.




Technical features:

Material	Brass, nickel-plated
External thread	M16x1,5 up to M40x1,5 acc. to EN 60423
Internal thread	1/2" NPT up to 1 1/4" NPT acc. to ANSI B 1.20.1 1983/1992
Temperature range	-60°C up to +200°C (without O-Ring) -20°C up to +100°C (with O-Ring)



Norm references:

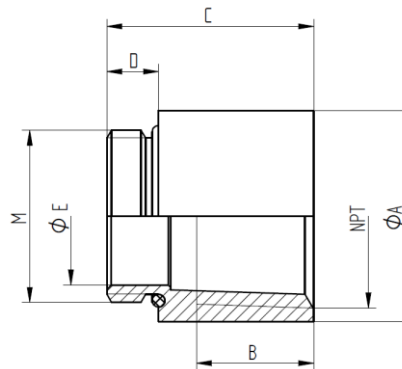

External-thread M	Internal-thread NPT	Diameter Ø A mm	Thread Length B mm	Length Ø C mm	Thread Length D mm	Diameter Ø E mm	Part No.
SKINDICHT® MA-M/NPT without O-Ring							
M16x1,5	1/2"	24	14	24,5	6,5	11	54020100
M20x1,5	1/2"	24	14	24,5	6,5	14	54020110
M25x1,5	1/2"	26	14	24,5	6,5	18	54020120
M25x1,5	3/4"	30	15	25	7	18	54020130
M32x1,5	1/2"	34	17,2	25	7	17	54020140
M32x1,5	1"	37	16,8	29,5	7	27,7	54020152
M40x1,5	1 1/4"	46	17,8	31	8	34,5	54020153
SKINDICHT® MA-M/NPT with O-Ring							
M20x1,5	1/2"	24	14	24,5	6,5	14	54020154
M25x1,5	3/4"	30	15	25	7	18	54020155
M32x1,5	1"	37	16,8	29,5	7	27,7	54020156
M40x1,5	1 1/4"	46	17,8	31	8	34,5	54020157

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB54020100EN Version: 03	Page 1 of 1
---	---------------------------------------	-------------