


**C-profile Type 2986**

C-profile, slot width 18 mm, acc. to DIN EN 60715, perforated

2986/3 FL

EAN Code: 4013339193165

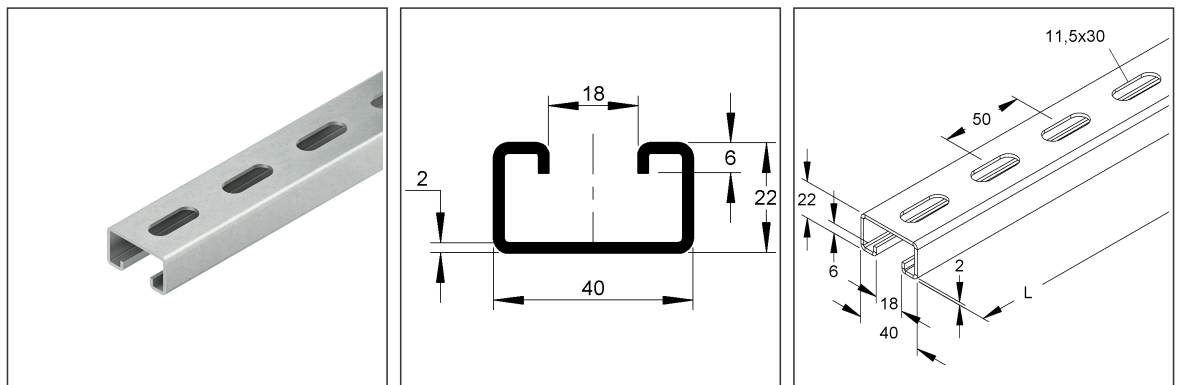

**Article Description**

C-profile, C-profile, slot width 18 mm, 40x22x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

**Weight**

Weight per quantity unit	1,640 kg
Weight in kg per 100	164 kg

**Physical Article Dimensions**

Height	22.00 mm
Width	40.00 mm
Depth/length	3000 mm

**Additional Price Information**

Article group	N13
---------------	-----

# Technical Datasheet

## Niedax rails

2986/3 FL

### Packing Dimension

<b>6 meters = 1 bundle</b>		✓ VP1-smallest packaging unit ( PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	45.00 mm	Height	27.00 mm
Gross weight	9,84 kg	Volume	0,004 m <sup>3</sup>		
Min. quantity	6	Max. Quantity	6		

<b>750 meters = 1 rack</b>					
Lenght	3000 mm	Width	850 mm	Height	770 mm
Gross weight	1289 kg	Volume	1,964 m <sup>3</sup>		
Min. Quantity	750.00	Max. Quantity	750.00		

### Tender Text

Anchor/C-profile rail model 2986, C-profile acc. to DIN EN 60715, perforated. Suitable U-clamps (BU... and BUK...). The protective cap SKC 86 must be fitted in personal hazard areas. To ensure that the protective cap can be fitted without problems, a distance of at least 30 mm from the end of the profile must be maintained. Please observe additional regulations for use in functional maintenance!

Dimensions (approx. dimensions) H x W x d : 22 x 40 x 2 mm

Slot width : 18 mm

Profile perforation : 11.5 x 30 mm

Centre distance : 50 mm

Delivery length L : 3000 mm

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : 2986/3 FL

EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_

Unit price/meter

### Safety & Environment

REACH Date	17.01.2022
REACH Info	Conformable
RoHS Info	Conformable

### Origin & International Trade

Country of origin	DE
Customs tariff number	73269098