


ACQUEX T8

Simply, safe and reliable for explosive atmospheres, for T8 tubes

Zone 2, 22

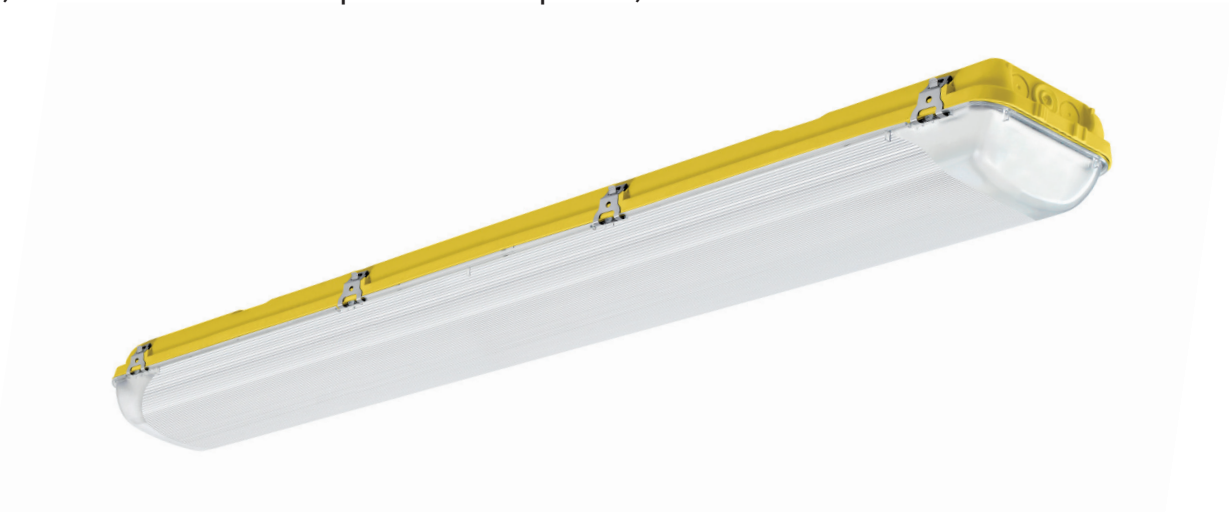

Benefits

- Outstanding impact resistance IK10.
- For T8 fluorescence tubes.
- Quick and easy mounting on ceiling, wall or suspended.

Characteristics

IP 66 IK 10 Frequency 50/60Hz Rated voltage 220-240V

Mechanical characteristics

Housing	Compressed fibreglass reinforced polyester (GRP) in yellow RAL 1003
Diffuser	Injected polycarbonate transparent diffuser with UV protection Prismatic design for an optimum light distribution
Closing clips	Stainless steel
Gasket	Polyurethane
Gear tray	White lacquered steel plate
Cable entry	Cable gland
Fixing clips	Stainless steel
Suspension triangles	Stainless steel



Electrical characteristics

Connection	3/5 push wire terminal block
------------	------------------------------


Ex II 3G Ex nA IIC T6 Gc
Ex II 3D Ex t IIC T85 Dc IP66

Functional characteristics

Guarantee	3 years
Fire protection	GRP: Flammability (UL94): HB Glow wire test (EN 60695-2-11): 650°C PC: Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°C

Compliance

Photometrical characteristics

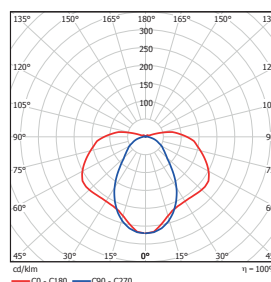

ACQUEX T8

Description

FAMILY	TUBE TYPE	ELECTRICAL VERSION	EMERGENCY KIT	DIFFUSER	CLOSING CLIPS
> ACQUEX 2	> 2-118: 1x18W > 2-136: 1x36W > 2-158: 1x58W > 218: 2x18W > 236: 2x36W > 258: 2x58W	> E: electronic (high frequency), non-dimmable ballast	> EB1: 1 hour > EB3: 3 hours	> PC: polycarbonate	> INOX: stainless steel

Special options under request

Ask our Sales Team for more details

Operational data

Description	Order number	X	Xm	Y	Z					
		mm	mm	mm	mm	L x W x H mm	Pcs./Box	Box	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
ACQUEX 2-118 E PC INOX	10107925	665	390	145	101	675 x 151 x 105	1	2.0	150	90 + 90
ACQUEX 2-136 E PC INOX	10107931	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 2-136 E EB1 PC INOX	10121644	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 2-136 E EB3 PC INOX	10121645	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 2-158 E PC INOX	10107932	1578	1100	145	101	1589 x 151 x 105	1	4.0	75	45 + 45
ACQUEX 218 E PC INOX	10107935	665	390	145	101	675 x 151 x 105	1	2.0	150	90 + 90
ACQUEX 218 E EB1 PC INOX	10121664	665	390	145	101	675 x 151 x 105	1	2.0	150	90 + 90
ACQUEX 218 E EB3 PC INOX	10121665	665	390	145	101	675 x 151 x 105	1	2.0	150	90 + 90
ACQUEX 236 E PC INOX	10107904	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 236 E EB1 PC INOX	10120265	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 236 E EB3 PC INOX	10120266	1282	800	145	101	1289 x 151 x 105	1	3.3	75	45 + 45
ACQUEX 258 E PC INOX	10107938	1578	1100	145	101	1589 x 151 x 105	1	4.0	75	45 + 45
ACQUEX 258 E EB1 PC INOX	10121666	1578	1100	145	101	1589 x 151 x 105	1	4.0	75	45 + 45
ACQUEX 258 E EB3 PC INOX	10121667	1578	1100	145	101	1589 x 151 x 105	1	4.0	75	45 + 45

Please check with our Back Office to confirm logistic data

