

PEP T5

Weatherproof luminaire for T5 tubes



									3 YEARS warranty	
--	--	--	--	--	--	--	--	--	----------------------------	--

Benefits

- Classic design for a wide range of **general and industrial applications**.
- Great **impact resistance**.

Characteristics

IP 65	IK 07	Frequency 50/60Hz	Rated voltage 220-240V		
-------	-------	----------------------	---------------------------	--	--

Mechanical characteristics

Housing	Compressed fibreglass reinforced polyester (GRP) Grey RAL 7035
Diffuser	Injected polycarbonate with UV protection
Closing clips	Polyamide 6
Gasket	Polyurethane
Gear tray	White lacquered steel plate
Cable entry	Grommet
Lamp holder	G13

Functional characteristics

Guarantee	3 years
Fire protection	GRP: Flammability (UL94): HB Glow wire test (EN 60695-2-11): 650°C PC: Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°C

Compliance


Electrical characteristics

Connection	3-pole connection strip
------------	-------------------------

Photometrical characteristics

1 TUBE

2 TUBES

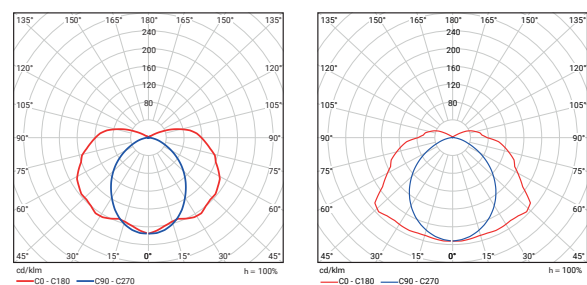

PEP T5

Description

FAMILY / MODEL	TUBE TYPE	ELECTRICAL VERSION
> PEP	> 114: 1x14W > 214: 2x14W > 124: 1x24W > 224: 2x24W > 128: 1x28W > 228: 2x28W > 135: 1x35W > 235: 2x35W > 149: 1x49W > 249: 2x49W > 154: 1x54W > 254: 2x54W > 180: 1x80W	> E: electronic (high frequency), non-dimmable ballast

Special options under request

Operational data

Description	Order number	X	Xm	Y	Z	L x W x H mm	Pcs./ Box	Box KG	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
		mm	mm	mm	mm					
PEP 114 E	10017079	666	230	100	108	666 x 100 x 108	1	1.0	210	168 + 168
PEP 124 E	10094751	666	230	100	108	666 x 100 x 108	1	1.0	210	168 + 168
PEP 128 E	10017080	1275	840	100	108	1275 x 100 x 108	1	1.8	105	84 + 84
PEP 135 E	10017081	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEP 149 E	10016268	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEP 154 E	10016250	1275	840	100	108	1275 x 100 x 108	1	1.8	105	84 + 84
PEP 180 E	10094752	1575	1140	100	108	1575 x 100 x 108	1	2.1	105	84 + 84
PEP 214 E	10016914	666	230	170	108	666 x 170 x 108	1	1.4	120	120 + 120
PEP 224 E	10094753	666	230	170	108	666 x 170 x 108	1	1.4	120	120 + 120
PEP 228 E	10016915	1275	840	170	108	1275 x 170 x 108	1	2.1	60	60 + 60
PEP 235 E	10022079	1575	1140	170	108	1575 x 170 x 108	1	2.6	60	60 + 60
PEP 249 E	10016916	1575	1140	170	108	1575 x 170 x 108	1	2.6	60	60 + 60
PEP 254 E	10016917	1275	840	170	108	1275 x 170 x 108	1	2.1	60	60 + 60

Please check with our Back Office to confirm logistic data

