


Mosaic™ Socket outlets - German standard

Cat. No(s): 0 772 10 - 6 771 20/26/27/29



0 772 10


1. USE

Socket outlets without shutters for installation in flush-mounting box, surface-mounting box, floor box, column module, desktop multi-outlet extension, office module and trunking.

2. RANGE

Description	Colour	Cat. Nos
2 P+E socket outlet - 2 modules	White	0 772 10
	White	6 771 20
	Green	6 771 26
	Orange	6 771 27
2 P+E socket outlet with flap - 2 modules	White	6 771 29

3. DIMENSIONS (mm)

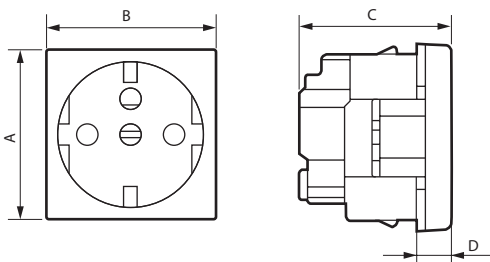

	A	B	C	D
0 772 10 - 6 771 20/26/27	45	45	40	8.5
6 771 29	45	45	43	8.5

4. CONNECTION

Type of terminals: with screws
 Terminals capacity: 2 x 4 mm²
 Stripping length: 10 mm
 Screwdriver: flat 4 mm
 Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
 Protection against impacts: IK 04

■ 5.2 Material characteristics

Material: - Base: PC
 - Cover plate: PC
 - Halogen free
 - UV resistant

Self-extinguishing:

- 850°C/30 s for insulating parts holding live parts in place
- 650°C/30 s for the other insulating part

■ 5.3 Electrical characteristics

Voltage: 250 V~
 Current: 16 A
 Frequency: 50-60 Hz

■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C
 Operating temperature: - 5° C to + 50° C

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.