

ELMARK[®]

The Brand of Electricity

DOWNLIGHT SET WITH LED STICK LAMPS



Technical data:

- Nominal voltage: 230V / 50Hz
- Power: 2X9W; 1X9W;
- Lamp holder: E27
- Type of light source: 2pcs LED Stick SMD lamps
- Colour temperature: 4000K; 2700K
- Body color: satin nickel/chrome; graphite/chrome; satin nickel; white
- Long lifetime: 30 000h
- Switch ON/OFF: < 20 000
- Dust and humidity protection level: IP44
- Protection against electric shock: I
- Protection against ignition and fire: Class F



Downlight



LED STICKS LAMP



White



Satin nickel

Area of application:

- Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Variants and Dimensions:



TECHNICAL SPECIFICATION

DOWNLIGHT

ELMARK

The Brand of Electricity

Type	Watt (W)	LED lamp lumens (lm)	Socket type	Colour body	Size (mm)			Catalogue number	
					Diameter	Height	Diameter1	4000K	2700K
GL201E	2X9	2x750	E27	satin nickel	226	110	210	92201LEDW/SN	92201LEDWW/SN
GL201E	2X9	2x750	E27	white	226	110	210	92201LEDW/W	92201LEDWW/W
GL202E	2X9	2x750	E27	satin nickel	226	110	210	92202LEDW/SN	92202LEDWW/SN
GL202E	2X9	2x750	E27	white	226	110	210	92202LEDW/W	92202LEDWW/W
GL203E	2X9	2x750	E27	satin nickel	235	110	210	92203LEDW/SN	92203LEDWW/SN
GL203E	2X9	2x750	E27	white	235	110	210	92203LEDW/W	92203LEDWW/W
GL204E	2X9	2x750	E27	satin nickel	230	110	210	92204LEDW/SN	92204LEDWW/SN
GL204E	2X9	2x750	E27	white	230	110	210	92204LEDW/W	92204LEDWW/W
GL205E	2X9	2x750	E27	satin nickel	225	110	210	92205LEDW/SN	92205LEDWW/SN
GL205E	2X9	2x750	E27	white	225	110	210	92201LEDW/SN	92201LEDWW/SN
GL201E	2X9	2x750	E27	satin nickel	226	110	210	92201LEDW/W	92201LEDWW/W
GL201E	2X9	2x750	E27	white	226	110	210	92202LEDW/SN	92202LEDWW/SN
GL206E	2X9	2x750	E27	graphite/ chrome	225	110	210	92206LEDW/GH	92206LEDWW/GH
GL206E	2X9	2x750	E27	satin nickel/ch rome	225	110	210	92206LEDW/SH	92206LEDWW/SH
GL210E	2X9	2x750	E27	satin nickel	228	110	210	92210LEDW/SN	92210LEDWW/SN
GL210E	2X9	2x750	E27	white	228	110	210	92210LEDW/W	92210LEDWW/W
GL211E	2X9	2x750	E27	white	230	110	210	92211LEDW/SN	92211LEDWW/SN
GL211E	2X9	2x750	E27	satin nickel	230	110	210	92211LEDW/W	92211LEDWW/W
GL213E*	2X9	2x750	E27	satin nickel	266	65	-	92213LEDW/SN	92213LEDWW/SN
GL213E*	2X9	2x750	E27	white	266	65	-	92213LEDW/W	92213LEDWW/W
GL214E*	2X9	2x750	E27	satin nickel	240	60	-	92214LEDW/SN	92214LEDWW/SN
GL214E*	2X9	2x750	E27	white	240	60	-	92214LEDW/W	92214LEDWW/W
GL120E	1X9	750	E27	satin nickel	190	200	170	92120LED6W/TCH	92120LED6WW/TCH
GL120E	1X9	750	E27	white	190	200	170	92120LED6W/W	92120LED6WW/W
GL120E	1X9	750	E27	satin nickel	140	160	120	92120LED4W/TCH	92120LED4WW/TCH
GL120E	1X9	750	E27	white	140	160	120	92120LED4W/W	92120LED4WW/W


*surface mounting

TECHNICAL SPECIFICATION

DOWNLIGHT

ELMARK[®]

The Brand of Electricity

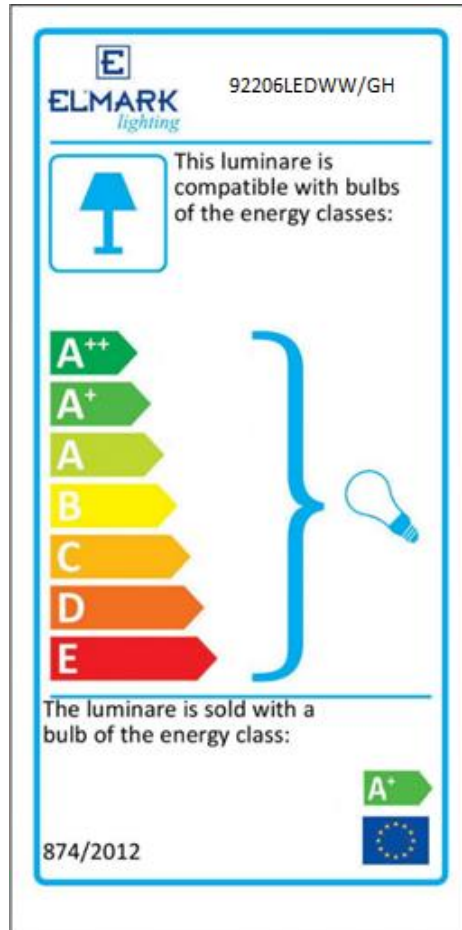

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 •

