

## LED FLOODLIGHT VEGA SLIM



### **Technical data**

<i>Rated voltage:</i>	220-240V/ 50-60Hz
<i>Power:</i>	10W; 20W; 30W; 50W; 100W
<i>LED driver:</i>	Linear- mounting in the body
<i>Colour temperature:</i>	5500K
<i>LED source:</i>	SANAN
<i>Colour:</i>	Black
<i>Body:</i>	Plastic+ Aluminium
<i>Cable length:</i>	300mm
<i>Beam angle:</i>	110°
<i>Colour rendering index:</i>	Ra> 70
<i>Average lifetime:</i>	20 000h
<i>Ambient temperature:</i>	-30°C÷ +55°C
<i>Protection against dust and moisture:</i>	IP65

## Features

- *Efficient replacement of traditional halogen and metal-halide floodlights*
- *Wide distribution of even and stable light*
- *Economic - low power consumption*
- *Repeated switch on/off does not affect the fixture lifespan*
- *Instant light at maximum luminous flux*
- *Environmentally friendly - no mercury and lead*
- *No ultraviolet and infrared rays*
- *Resistant to shock and vibration stable body*
- *Voltage supply fluctuations do not affect the normal operation of the floodlights*


## Area of application

- *Sports halls*
- *Commercial areas*
- *Warehouses*
- *Production facilities*
- *Squares*
- *Parking lots*

## Variants and Dimensions

<i>Model</i>	<i>Watt</i>	<i>Whole fixture lumens</i>	<i>Colour temp.</i>	<i>Colour body</i>	<i>Size (mm)</i>			<i>Catalogue number</i>
	<i>(W)</i>	<i>(lm)</i>	<i>(K)</i>		<i>Length</i>	<i>Width</i>	<i>Height</i>	
<b>VEGASLIM10</b>	10	800	5500	Black	90	120	40	<b>98VEGA10SLIM</b>
<b>VEGASLIM20</b>	20	1600	5500	Black	130	172	51	<b>98VEGA20SLIM</b>
<b>VEGASLIM30</b>	30	2400	5500	Black	135	180	51	<b>98VEGA30SLIM</b>
<b>VEGASLIM50</b>	50	4000	5500	Black	172.5	230	59	<b>98VEGA50SLIM</b>
<b>VEGASLIM100</b>	100	8000	5500	Black	306	202	45	<b>98VEGA100SLIM</b>

## Energy efficiency

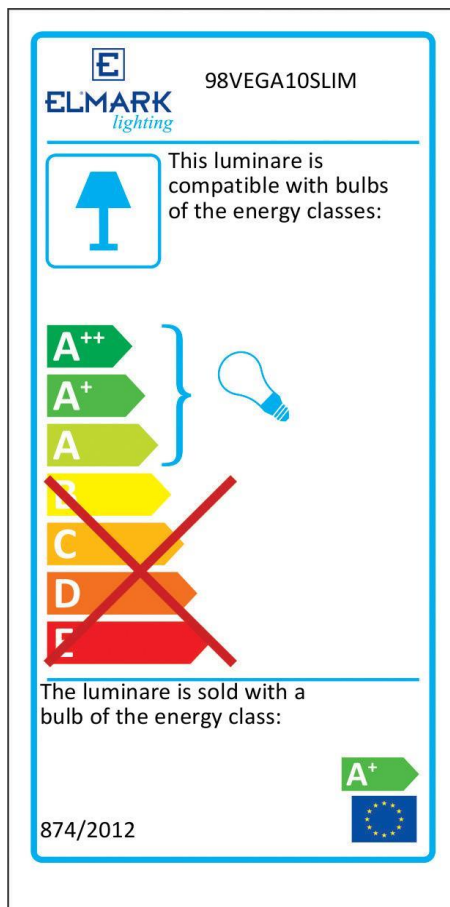

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 • 60598-2-5 •

