

# EL<sup>®</sup>MARK

The Brand of Electricity

## LED CEILING FIXTURE BRICE



# TECHNICAL SPECIFICATION

## OUTDOOR- LED FIXTURES

**ELMARK**<sup>®</sup>

The Brand of Electricity

---

### Technical data:

---

- Power: 12W; 24W
- Rated voltage: 230V; 50-60Hz
- Colour temp.: 4000K
- Power Supply: control gear, DC device-driver
- LED type: SMD2835
- Light source: EPISTAR
- Colour rendering index: Ra≥80
- Average Lifetime: 30 000h
- Body: Polycarbonate
- Colour of the body: White
- Installation: Surface mounting
- Protection against dust and moisture: IP44
- Protection against electric shock: I
- Surface requirements: Class F

---

### Features:

---

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Safety, low voltage operation
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays

---

### Area of application:

---

- Residential buildings
- Commercial buildings
- Administrative buildings
- Banks
- Hospitals

# TECHNICAL SPECIFICATION

## OUTDOOR- LED FIXTURES


**ELMARK**<sup>®</sup>

The Brand of Electricity

---

### Variants and Dimensions:

---

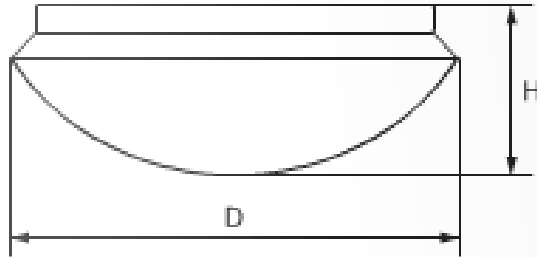

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Size (mm)			Packing/ Box (pcs)
						Length	Width	Height	
95BRICE12LED	12	1080	4000	white	44	260	260	90	1/16
95BRICE24LED	24	2160	4000	white	44	380	380	110	1/10

---

### Barcodes:

---


3800131207142	95BRICE12LED
3800131207159	95BRICE24LED

# TECHNICAL SPECIFICATION

## OUTDOOR- LED FIXTURES

# ELMARK<sup>®</sup>


The Brand of Electricity










**ELMARK**  
*lighting*

95BRICE24LED

---




This luminaire  
contains built-in  
LED lamps.

	}	L
		E
		D
		
		
		
		

---

The lamps cannot be changed  
in the luminaire.

874/2012



EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4

