

ELMARK[®]

The Brand of Electricity

LED FACADE FIXTURES

GRF330-1



GENERAL INFORMATION »

- ∴ Input voltage: AC85-265V
- ∴ Power: 10W; 2x10W; 15W; 2x15W
- ∴ LED driver: Waterproof sealed driver
- ∴ Colour temperature: 3000K; 4000K
- ∴ LED source: Epistar LED
- ∴ Beam angle: 60°
- ∴ Colour rendering index: Ra > 70
- ∴ Material: Die-cast Aluminum+ stainless steel cover
- ∴ Colour: Black
- ∴ Protection against dust and moisture: IP65

FEATURES »

- ∴ Highly efficient replacement of conventional lighting fixtures
- ∴ Low power consumption
- ∴ Repeated switch on/off does not affect the lifespan of the fixture
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Low heat emission
- ∴ Compact size


AREA OF APPLICATION »

- ∴ Suitable for outdoor use
- ∴ Gardens
- ∴ Parks

PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour
96GRF330WW/1BL	10	1000	3000	Black
96GRF330/1BL	10	1000	4000	Black
96GRF330WW/2BL	2x10	2000	3000	Black
96GRF330/2BL	2x10	2000	4000	Black
96GRF331WW/1BL	15	1500	3000	Black
96GRF331/1BL	15	1500	4000	Black
96GRF331WW/2BL	2x15	3000	3000	Black
96GRF331/2BL	2x15	3000	4000	Black

DIMENSIONS »

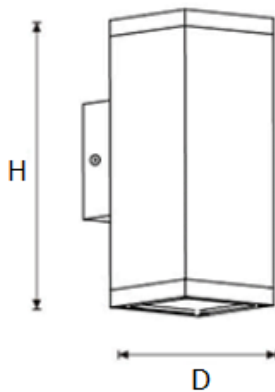

Catalogue number	D (mm)	H (mm)
96GRF330WW/1BL	90	160
96GRF330/1BL	90	160
96GRF330WW/2BL	90	260
96GRF330/2BL	90	260
96GRF331WW/1BL	120	200
96GRF331/1BL	120	200
96GRF331WW/2BL	120	300
96GRF331/2BL	120	300

