

EL[®]MARK

The Brand of Electricity

LED FACADE FIXTURE

MARTA



GENERAL INFORMATION »

- ∴ Rated voltage: 230V / 50-60Hz
- ∴ Power: 1x6W; 2X6W
- ∴ Colour temperature: 2700/4000 settable
- ∴ Colour rendering index: Ra≥80
- ∴ Operating temperature: -20° ÷ + 65°C
- ∴ Body material: Resin
- ∴ Lamp holder: GU10
- ∴ Protection against dust and moisture: IP55


FEATURES »

- ∴ Modern style, made of shockproof resin material
- ∴ LED lamp range in modern style made of shockproof resin material
- ∴ UV-rays stabilized
- ∴ Rust and corrosion-free
- ∴ Suitable for indoor and outdoor installations on wall and ceilings
- ∴ Economic- low power consumption
- ∴ Repeated switch on/off does not effect the fixture lifespan
- ∴ Instant light at maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body

PRODUCT DETAILS »

Catalogue number	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Lamp holder
96MARTA901L/BL	Facade lighting	black	1x6	600	2700/4000 settable	1xGU10
96MARTA901L/GR	Facade lighting	gray	1x6	600	2700/4000 settable	1xGU10
96MARTA902L/BL	Facade lighting	black	2x6	1200	2700/4000 settable	2xGU10
96MARTA902L/GR	Facade lighting	gray	2x6	1200	2700/4000 settable	2xGU10

DIMENSIONS »

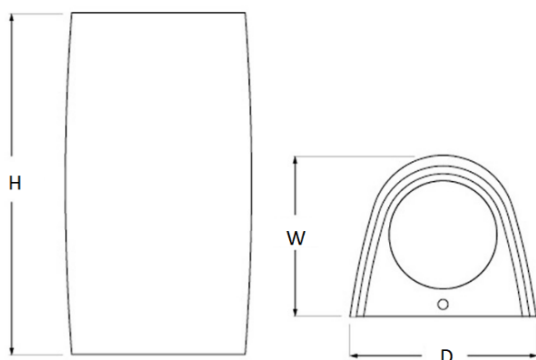

Catalogue number	Diameter (mm)	Width (mm)	Height (mm)
96MARTA901L/BL	92	80	170
96MARTA901L/GR	92	80	170
96MARTA902L/BL	92	80	170
96MARTA902L/GR	92	80	170

ADDITIONAL INFORMATION »

E **ELMARK** lighting 96MARTA901L/BL

This luminaire is compatible with bulbs of the energy classes:

The luminaire is sold with a bulb of the energy class:

A+

874/2012

Catalogue number	Barcode	Packing/Box (pcs)
96MARTA901L/BL	8031874004155	1/36
96MARTA901L/GR	8031874004186	1/36
96MARTA902L/BL	8031874011337	1/36
96MARTA902L/GR	8031874011375	1/36

