

# EL<sup>®</sup>MARK

The Brand of Electricity

## LED WALL FIXTURE TINA



---

### Technical data:

---

- Rated voltage: 230V / 50-60Hz
- Power: 12W
- Colour temperature: 4000K
- Colour rendering index: Ra≥80
- Switch on/off > 15 000
- Average Lifetime: 30 000h
- Operating temperature: -20° ÷ + 65°C
- Body material: Resin
- Colour body: Black
- Protection against dust and moisture: IP65
- Suitable for wall and ceiling installation.

---

### Features:

---

- Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.
- Wide distribution of even and stable light
- Economic- low power consumption
- Repeated switch on/off does not effect the fixture lifespan
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body

---

### Area of application:

---

- Suitable for outdoor use
- Additional, aesthetic, spectacular, architectural lighting for gardens, parks, yard or other outdoor spaces


# TECHNICAL SPECIFICATION

## FACADE AND GROUND

**ELMARK**<sup>®</sup>

The Brand of Electricity


### Basic data:

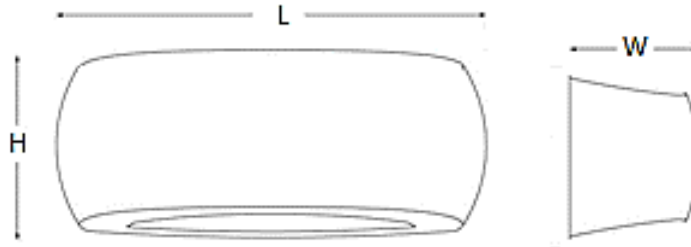

Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Size (mm)			Packing/Box (pcs)	Catalogue number
				Length	Width	Height		
Garden lighting	12	1080	4000	230	72	105	1	95TINA12/BL

95TINA12/BL

**ELMARK**  
lighting

 This luminaire is compatible with bulbs of the energy classes:

A<sup>++</sup>

A<sup>+</sup>

A


~~B~~

~~C~~

~~D~~


~~E~~

}



The luminaire is sold with a bulb of the energy class:

A<sup>+</sup>



874/2012

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 13032-4



[www.elmarkholding.eu](http://www.elmarkholding.eu)