

FACADE LIGHTING GRF98



Technical data

<i>Rated voltage:</i>	12V/ 50-60Hz
<i>Lamp holder:</i>	G4
<i>Body colour:</i>	Antique bronze
<i>Protection against dust and moisture:</i>	IP65
<i>Installation:</i>	Surface mounting on a wall

Features

- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body

Area of application

- Suitable for outdoor use
- Additional, aesthetic, directional, architectural lighting for buildings' facades, fences' columns and other outdoor sites

Variants and dimensions




	Model	Lamp holder	Colour body	Material	Size (mm)		Catalogue number
					Width/ Diameter	Height	
FACADE LIGHTING	GRF98A	1xG4	Antique bronze	Brass	98	48	96GRF98A/AB
	GRF98B	1xG4	Antique bronze	Brass	98	41	96GRF98B/AB
	GRF98C	1xG4	Antique bronze	Brass	98	41	96GRF98C/AB

Barcodes

3800131200501	96GRF98A/AB
3800131200518	96GRF98B/AB
3800131200525	96GRF98C/AB

Energy efficiency

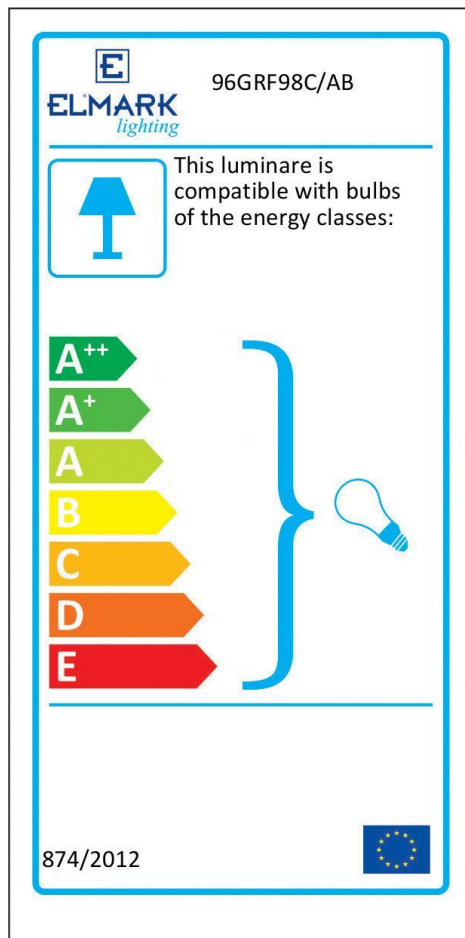

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 •

