

ELMARK[®]

The Brand of Electricity

GRF LED RECESSED FIXTURE

96GRFLED016



GENERAL INFORMATION »

- ∴ Rated voltage: 230V / 50-60Hz
- ∴ Power: 2W
- ∴ Light source: SMD2835
- ∴ Colour temperature: 3000K/4000K
- ∴ Body: Aluminium
- ∴ Operating temperature: -20°C÷+65°C
- ∴ Colour rendering index: Ra≥80
- ∴ Switch on/off > 20 000
- ∴ Average Lifetime: 30 000h
- ∴ Installation: recessed outdoor ground mounting
- ∴ Protection against dust and moisture: IP65
- ∴ Type: Ground recessed fixture

FEATURES »

- ∴ Highly efficient replacement of conventional lighting fixtures
- ∴ Low power consumption
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Low heat emission
- ∴ Compact size

APPLICATION »

- ∴ Suitable for outdoor use
- ∴ Additional, aesthetic, directional, architectural lighting for buildings, facades, fences' columns and other outdoor sites
- ∴ Places with high level of moisture

TECHNICAL SPECIFICATION SHEET

ELMARK[®]



The Brand of Electricity

PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (Lm)	Efficiency (lm/W)	Colour temp. (K)
96GRFLED016WW	2W	50	25	3000
96GRFLED016	2W	50	25	4000

DIMENSIONS »

Model	Length (mm)	Width (mm)
96GRFLED016WW	85	85
96GRFLED016	85	85

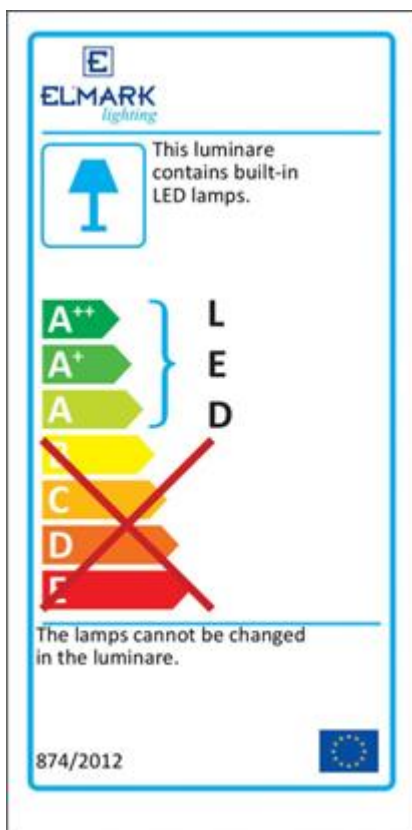

ADDITIONAL INFORMATION »

Catalogue number	Barcode
96GRFLED016WW	3800131252050
96GRFLED016	3800131249715