

ELMARK[®]

The Brand of Electricity

LED GROUND FIXTURE RAY



GENERAL INFORMATION »

- ∴ Input voltage: AC85-265V
- ∴ Power: 10W; 15W; 20W; 30W; 50W
- ∴ LED driver: Waterproof isolated driver
- ∴ Colour temperature: 3000K; 4000K
- ∴ LED source: COB LED Epistar
- ∴ Colour rendering index: Ra> 80
- ∴ Material: Stainless steel cover; die-cast aluminum lamp body; PC embedded parts; tempered glass
- ∴ Colour: Black
- ∴ Protection against dust and moisture: IP67

FEATURES »

- ∴ Highly efficient replacement of conventional lighting fixtures
- ∴ Low power consumption
- ∴ Repeated switch on/off does not affect the lifespan of the fixture
- ∴ Instant light with maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Low heat emission
- ∴ Compact size


AREA OF APPLICATION »

- ∴ Suitable for outdoor use
- ∴ Gardens
- ∴ Parks

PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour
96RAY10/WW	10	1000	3000	Black
96RAY10/W	10	1000	4000	Black
96RAY15/WW	15	1500	3000	Black
96RAY15/W	15	1500	4000	Black
96RAY20/WW	20	2000	3000	Black
96RAY20/W	20	2000	4000	Black
96RAY30/WW	30	3000	3000	Black
96RAY30/W	30	3000	4000	Black
96RAY50/WW	50	5000	3000	Black
96RAY50/W	50	5000	4000	Black

DIMENSIONS »

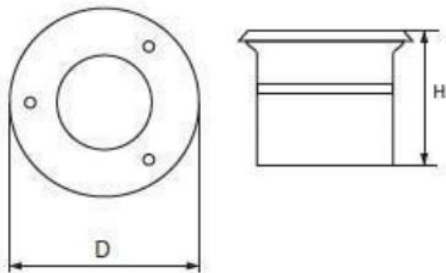

Catalogue number	D (mm)	H (mm)
96RAY10/WW	150	90
96RAY10/W	150	90
96RAY15/WW	180	90
96RAY15/W	180	90
96RAY20/WW	200	90
96RAY20/W	200	90
96RAY30/WW	250	90
96RAY30/W	250	90
96RAY50/WW	300	90
96RAY50/W	300	90

