

COMMERCIAL LED FIXTURES



Technical data

<i>Rated voltage:</i>	220-240V/ 50-60Hz
<i>Power:</i>	9W; 18W; 36W
<i>Colour temperature:</i>	4000K
<i>LED type:</i>	SMD2835
<i>Colour:</i>	Aluminium
<i>Body:</i>	Alu+PC
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	20 000
<i>Average life:</i>	20 000h
<i>Protection against dust and moisture:</i>	IP40

Features

- Completely replace traditional lighting fixtures
- Pleasant and uniform light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan
- Instant light with maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration-free body
- Low heat emission

Area of application

- Commercial sites
- Residence buildings
- Domestic lightings

Variants and Dimensions




Watt <i>(W)</i>	Whole fixture lumens <i>(lm)</i>	Colour temp. <i>(K)</i>	Colour body	Beam angle	Size <i>(mm)</i>			Catalogue number
					Length	Width	Height	
9	720	4000	Aluminium	90°	610	65	40	95204609
18	1440	4000	Aluminium	90°	1870	65	40	95204618
18	1440	4000	Aluminium	120°	605	100	43	95204518
36	2880	4000	Aluminium	120°	1190	100	43	95204536


TECHNICAL SPECIFICATION

- **Installation accessories for LED PROFILES**

Wire and fittings for hanging mounting 2,5m 2 pcs/ pack
Catalogue number: 92ACC03

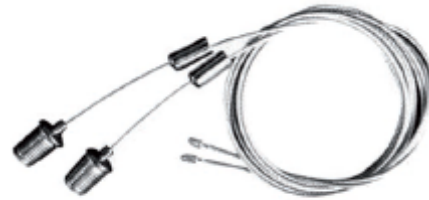

Energy efficiency

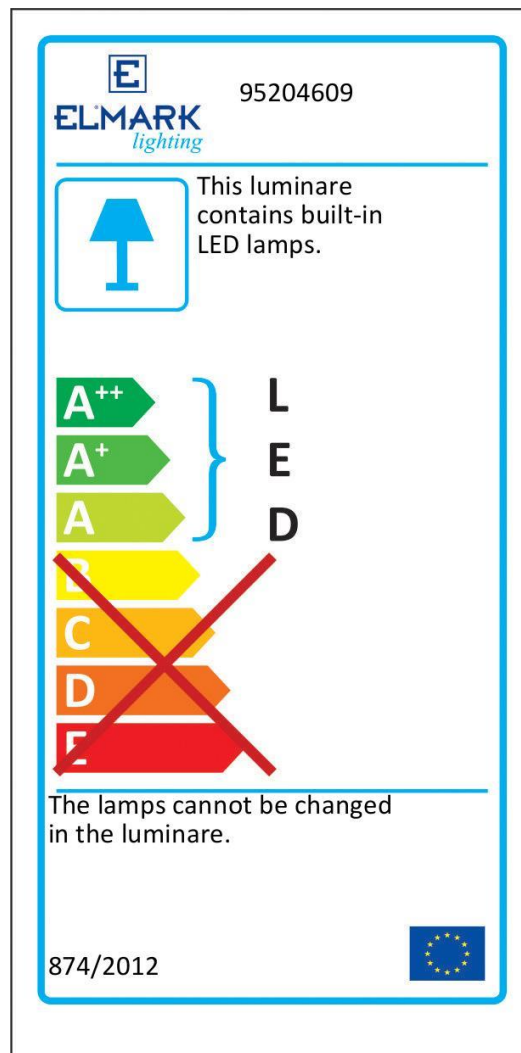

Barcodes

3800131201393	95204609
3800131201409	95204618
3800131201416	95204518
3800131201423	95204536

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 13032-4 •

