

## LED HIGH BAY FIXTURES MINICOLOR



### Technical data

<b>Power:</b>	30W
<b>Rated voltage:</b>	85V - 265V / 50-60Hz
<b>Power supply:</b>	low voltage, DC device – driver
<b>LED type:</b>	COB
<b>Light source:</b>	Epistar
<b>Protection against dust and moisture:</b>	IP64
<b>Colour temperature:</b>	5500K
<b>Housing:</b>	aluminum
<b>Colour of the housing:</b>	red, green, blue, black, white, grey
<b>Reflector:</b>	aluminum diameter 220mm 90°
<b>Ambient temperature:</b>	-30°C ÷ +65°C
<b>Long life:</b>	30000 hours

# TECHNICAL SPECIFICATION

## Features

- Efficient replacement of metal halide high bay fixtures
- Safety - low voltage operation
- Homogenous and flicker-free light distribution
- Low power consumption
- Repeated switch on/off does not affect the lifespan of the fixture
- Instant light at maximum luminous flux
- Environmentally friendly - no mercury and lead
- No ultraviolet and infrared rays
- Resistant to shock and vibration stable body

## Areas of application


- Commercial buildings
- Administrative buildings
- Residential buildings
- Restaurants, Bars

## Variants

<b>Watt</b>	<b>LED chip lumens</b>	<b>Whole fixture lumens</b>	<b>Colour temperature</b>	<b>Colour body</b>	<b>Catalogue number</b>
30W	3600 lm	2400 lm	5500K	red	98MINICOL-R
30W	3600 lm	2400 lm	5500K	green	98MINICOL-G
30W	3600 lm	2400 lm	5500K	blue	98MINICOL-B
30W	3600 lm	2400 lm	5500K	black	98MINICOL-BL
30W	3600 lm	2400 lm	5500K	white	98MINICOL-WT
30W	3600 lm	2400 lm	5500K	grey	98MINICOL-GR

# TECHNICAL SPECIFICATION


## Dimensions

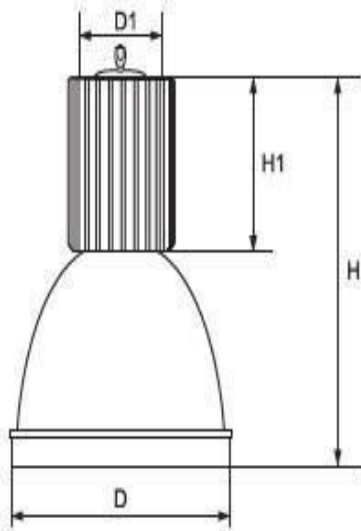


**Size  
(mm)**

D	D1	H	H1
220	115	280	120


## Luminous distribution

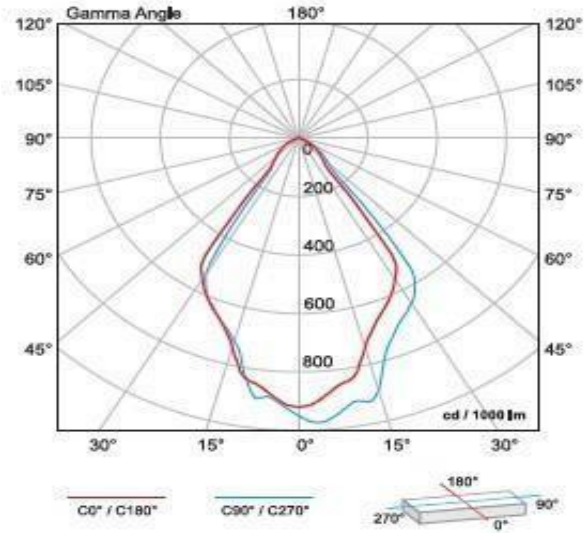

## Energy efficiency

 **ELMARK**  
lighting

98MINICOL-B

 This luminaire contains built-in LED lamps.

**A++**

**A+**

**A**

**B**

**C**

**D**

**E**


}

**L**

**E**

**D**

The lamps cannot be changed in the luminaire.

874/2012 

# TECHNICAL SPECIFICATION

## Barcodes

3800131183880	98MINICOL-R
3800131183897	98MINICOL-G
3800131183903	98MINICOL-B
3800131183910	98MINICOL-BL
3800131183927	98MINICOL-WT
3800131183934	98MINICOL-GR

## Standards

• EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

