

GARDEN LIGHTING

GRF507 LED



Technical data

<i>Rated voltage:</i>	220-240V/ 50-60Hz
<i>Power:</i>	10W;
<i>Colour temperature:</i>	4000K
<i>LED source:</i>	EPISTAR 2835 SMD
<i>Colour:</i>	Graphite black
<i>Material:</i>	Plastic+ Aluminium
<i>Colour rendering index:</i>	Ra> 80
<i>Average lifetime:</i>	30 000h
<i>Switch on/off:</i>	20 000
<i>Protection against dust and moisture:</i>	IP54

Features

- *Low power consumption*
- *Repeated switch on/off does not affect the lifespan*
- *Instant light with maximum luminous flux*
- *Environmentally friendly - no mercury and lead*
- *No ultraviolet and infrared rays*
- *Resistant to shock and vibration-free body*
- *Low heat emission*
- *Attractive design*

Area of application


- *Suitable for outdoor use*
- *Gardens*
- *Parks*

Variants and Dimensions

<i>Catalogue number</i>	<i>LED QTY</i>	<i>Whole fixture lumens</i>	<i>Colour temp.</i>	<i>Colour body</i>	<i>Size (mm)</i>		
	<i>(W)</i>	<i>(lm)</i>	<i>(K)</i>		Length	Width	Height
96LEDW507	10	800	4000	Graphite black	160	112	170
96LEDP50778	10	800	4000	Graphite black	160	82	780

TECHNICAL SPECIFICATION

Energy efficiency

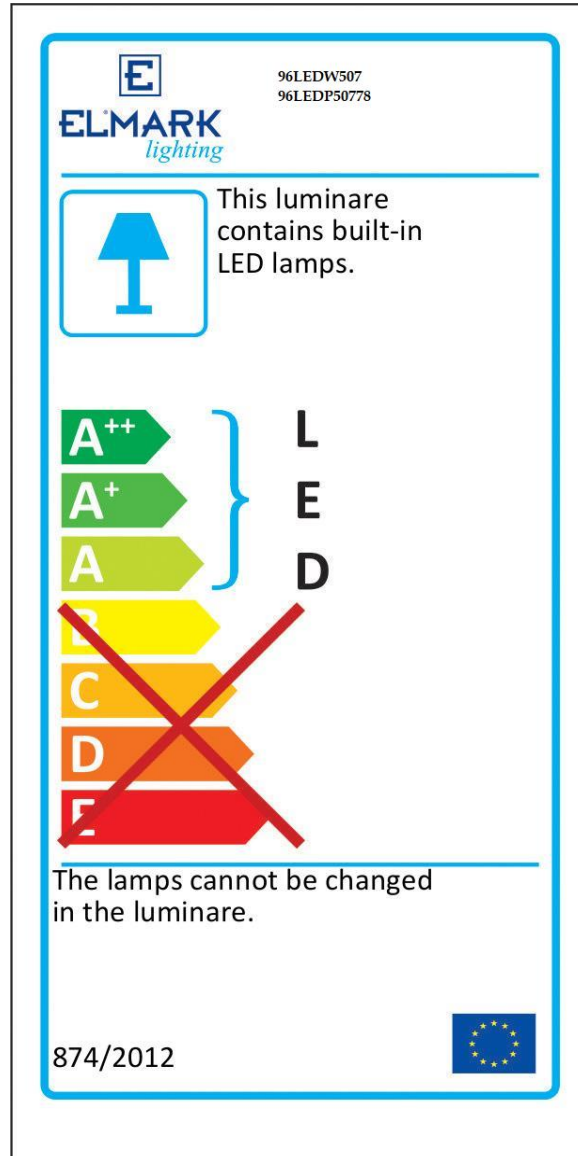

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • 60598-1 • 60598-2-2 •

