

LED FILAMENT GLOBE G45



Technical data

| | |
|------------------------------------|------------------|
| <i>Rated voltage:</i> | 230V; 50-60Hz |
| <i>Power:</i> | 2W; 4W; |
| <i>Colour temperature:</i> | 2700K; |
| <i>LED type:</i> | COB bracket |
| <i>LED source:</i> | Epistar Taiwan |
| <i>Lamp holder:</i> | E27 |
| <i>Beam angle:</i> | 360° |
| <i>Colour body:</i> | Mat |
| <i>Colour rendering index:</i> | Ra≥80 |
| <i>Warm-up time (60 %):</i> | Instant |
| <i>Number of switching cycles:</i> | >20 000 |
| <i>Average life:</i> | 30 000h |
| <i>Power factor:</i> | $\lambda > 0.80$ |
| <i>Starting time:</i> | < 0.50s |
| <i>Lamp mercury content:</i> | 0.0mg |


Features

- *Reduced operational cost thanks to lower energy consumption.*
- *Lower maintenance cost thanks to longer lifetime*
- *Mercury free.*
- *Maximum resistance to switching loads.*
- *Correct operation even at low temperature.*
- *Instant-on light.*

Area of application

- *General illumination*
- *Domestic applications*
- *Chandeliers*
- *Outdoor applications only in suitable luminaires*

Variants and Dimensions




| Watt | Whole fixture lumens | Colour temp. | Beam angle | Colour body | Size (mm) | | Catalogue number |
|------|----------------------|--------------|------------|-------------|-----------|----------|------------------|
| (W) | (lm) | (K) | | | Length | Diameter | |
| 2 | 200 | 2700 | 360° | Mat | 72 | 45 | 99LED709 |
| 4 | 400 | 2700 | 360° | Mat | 72 | 45 | 99LED665 |

Barcodes

| | |
|---------------|----------|
| 3800131188748 | 99LED709 |
| 3800131187277 | 99LED665 |

Energy efficiency

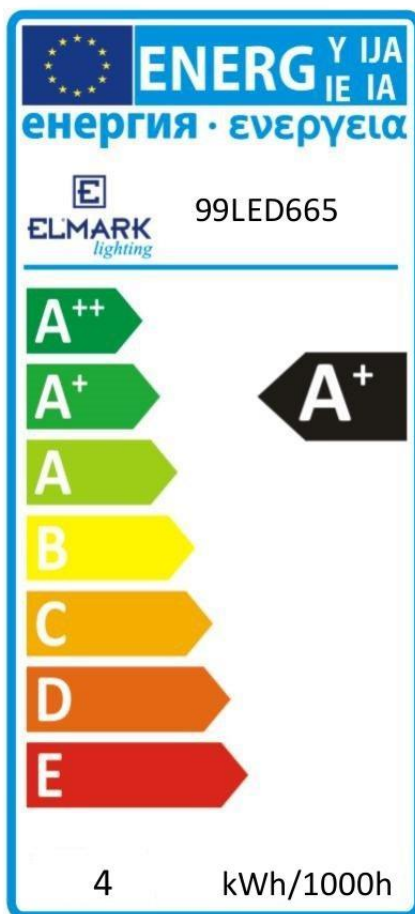

Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 •

