

EL[®]MARK

The Brand of Electricity

LED LAMP G9



Technical data:

- Rated voltage: 12V; 50-60Hz
- Power: 4W; 7W
- Colour temperature: 3000K; 4000K; 6500K
- LED source: SMD
- Lamp holder: G9
- Beam angle: 300°
- Colour rendering index: Ra≥80
- Switch on/off: >20 000
- Average life: 30 000h
- Protection degree: IP20

Features:

- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Compact and efficient.
- Correct operation even at low temperature.
- Instant-on light.

Area of application:

- General illumination
- Domestic applications
- Chandeliers
- Outdoor applications only in suitable luminaires


TECHNICAL SPECIFICATION

LAMPS AND COMPONENTS

ELMARK[®]

The Brand of Electricity

Variants and Dimensions:

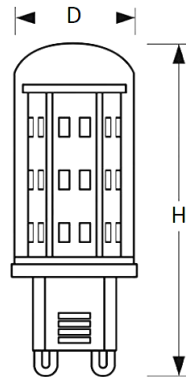

Description	Lamp holder	Watt	LED lamp lumens	Colour temp.	Beam angle	Size (mm)		Catalogue number
		(W)	(lm)	(K)		Length	Diameter	
LED G9-230V	G9	4	350	3000	300°	51	15	99LED815
LED G9-230V	G9	4	350	4000	300°	51	15	99LED816
LED G9-230V	G9	4	350	6500	300°	51	15	99LED817
LED G9-230V	G9	7	630	3000	300°	65	19	99LED933
LED G9-230V	G9	7	630	4000	300°	65	19	99LED933W
LED G9-230V	G9	7	630	6400	300°	65	19	99LED933CW

Barcodes:


99LED815	3800131205742
99LED816	3800131205759
99LED817	3800131205766
99LED933	3800131214898
99LED933W	3800131214904
99LED933CW	3800131215130

TECHNICAL SPECIFICATION

LAMPS AND COMPONENTS

ELMARK[®]

The Brand of Electricity

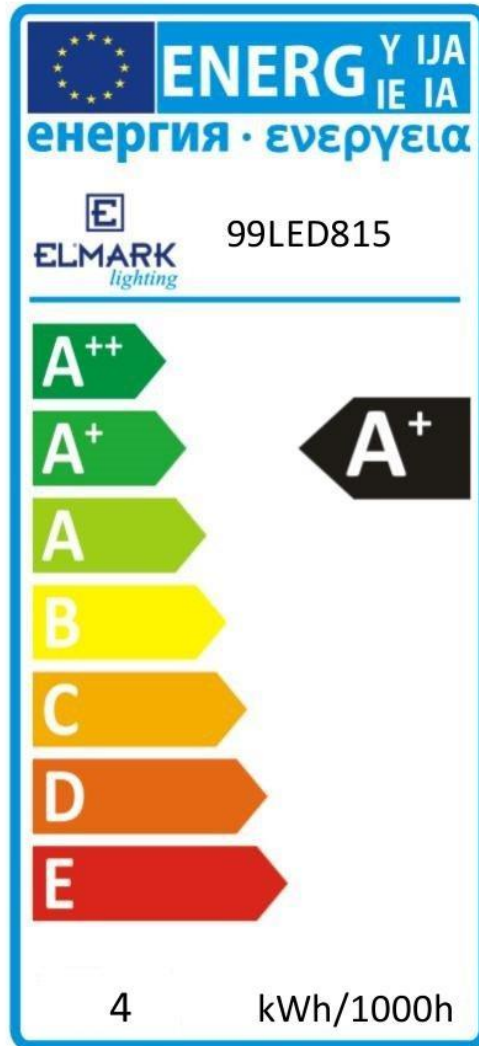

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 13032-4 • EN 62560 • EN 50581:2012

CE RoHS COMPLIANT

www.elmarkholding.eu